


SLURRY BUGGY

We have on stock liquid manure spreaders and agitators for your spring work.




HAUL LIQUID MANURE ALL DAY WITHOUT GETTING OFF THE TRACTOR SEAT USING THE SLURRY BUGGY EASY LOADER. THE SLURRY BUGGY IS DESIGNED FOR YOUR MANY LIQUID MANURE HANDLING JOBS.

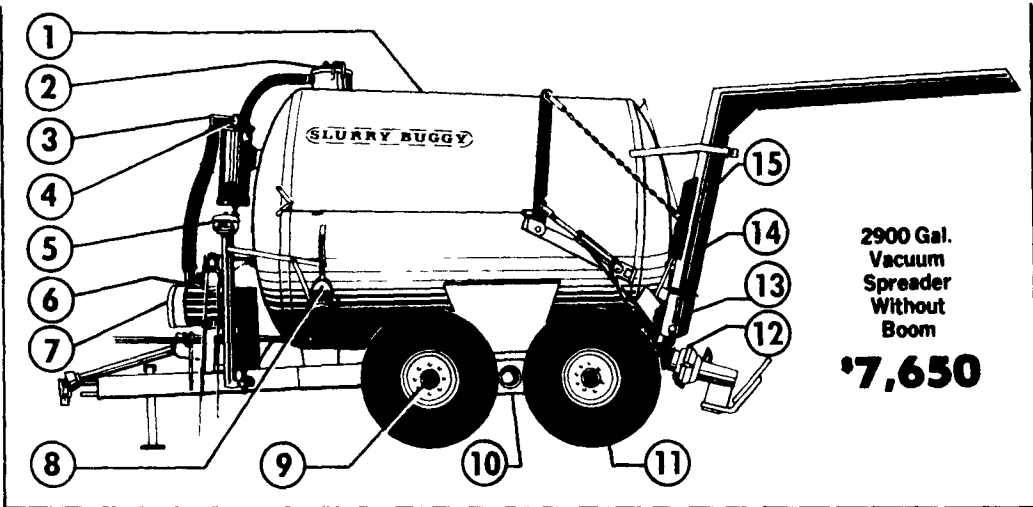


2900 Gal. Vacuum Spreader Without Boom \$7,650

- 2,900 gallon tank constructed of 5/16 inch thick metal to take higher vacuum and give owner longer tank life
- Top shut off trap with 6 inch shut off ball stops vacuum when tank is full (Top trap has removable lid with relief valve)
- Large moisture trap to catch foam or liquid from entering pump for longer pump life Trap also has sight glass and 1 inch drain valve for draining trap
- Vacuum/Pressure gauge on top of trap where it is easy to see from tractor seat or from ground
- Air precleaner keeps dirt and dust from entering pump for less pump wear
- Large air-cooled vacuum pump with 350 cubic feet of air per minute at 15 HG capacity Pump has three oiling ports, 2 for front and rear bearings and 1 center port for oiling Ferobestor Heat Treated Vanes Pump also has valve on top to switch pump from vacuum to pressure
- Fan on front cools pump
- 6 inch tapered brass side valve for easy loading when using 6 inch hose hookup
- Uses an 8,000 lb stress proof metal for spindles and 8 bolt hubs
- Heavy duty walking beam undercarriage made with heavy wall steel tubing
- Is equipped with 10 ply Good Year tires
- Spreader can be set for one of three different spreading patterns from 12 feet to 50 feet spread
- Rear unloading valve is a hydraulic operated 6 inch brass valve
- The Slurry Buggy has a 20 inch rear manhole for easy clean out
- Equipped with an 8 inch steel boom for loading from open pits and lagoon. Boom is raised and lowered hydraulically from your tractor seat Boom will load tank in approximately 2 to 3 minutes
- Tank also has float level indicator and sight glass in front of tank (not pictured)
- Also available - 2 or 4 tooth injector for injecting your liquid manure (not pictured)

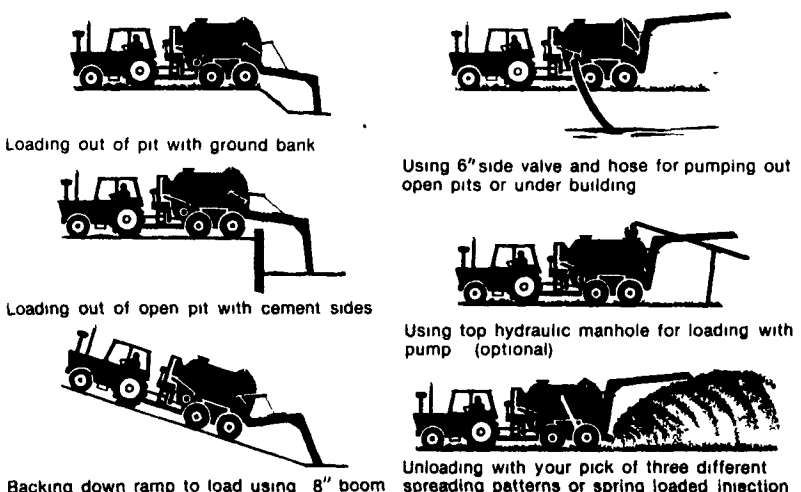

Loading out of pit with ground bank
Using 6" side valve and hose for pumping out open pits or under building
Loading out of open pit with cement sides
Using top hydraulic manhole for loading with pump (optional)
Backing down ramp to load using 8" boom
Unloading with your pick of three different spreading patterns or spring loaded injection

THE SLURRY MIXER is built to handle your liquid manure agitating problems.

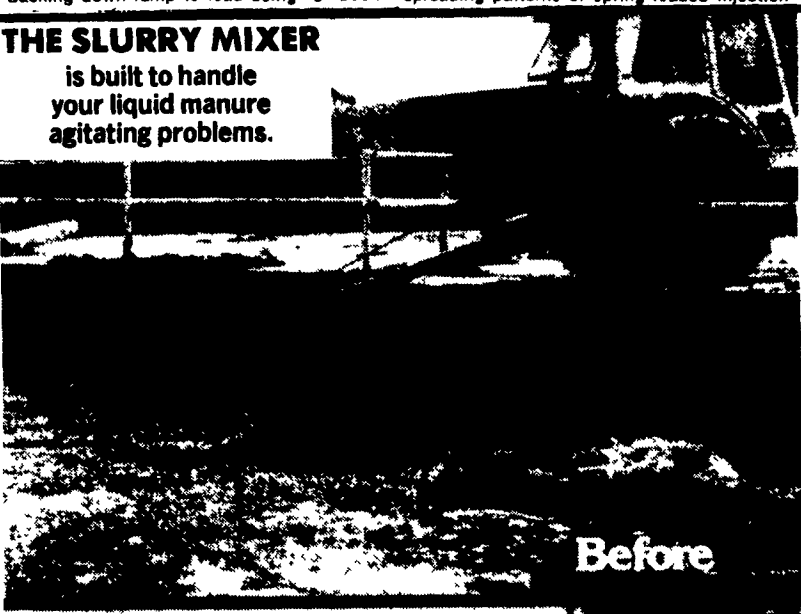


Before

We have on stock 18 Slurry Mixers PRICED TO SELL! \$2,285

This 3 point hitch Slurry Mixer's large 22" propellor produces a strong undercurrent that moves liquids, floating chunks of crust, weeds, bedding and dried manure into the propellor that chops, mixes and blends your manure into an even liquid Slurry.

Having purchased a large supply of vacuum pumps, we are passing the savings on to you for rebuilding your vacuum tanks.
Special Price Model PB 10 \$950
Model PB 3 \$825

Spring Time Special \$5,975

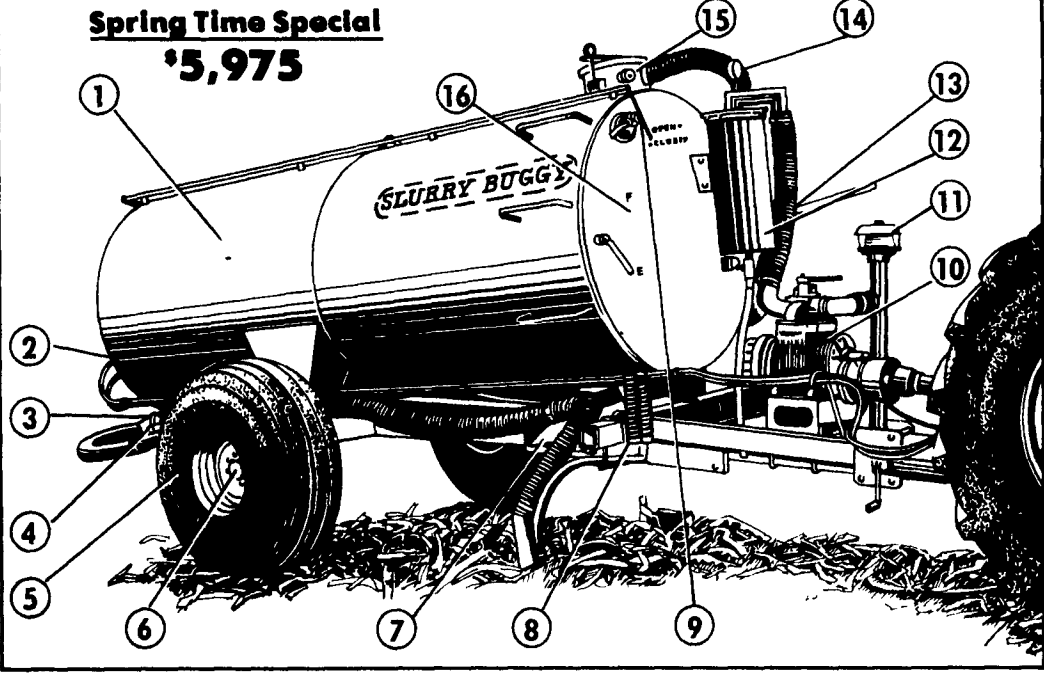

- 1500 gallon tank constructed of 5/16 inch thick metal to take higher vacuum and give owner longer tank life
- The Slurry Buggy has a 20 inch rear manhole for easy clean out
- Rear unloading valve is a hydraulic operated 6 inch brass valve
- Spreader can be set for one of three different spreading patterns from 12 feet to 35 feet spread for top dressing
- Equipped with 10 ply Good Year tires
- Uses an 8,000 lb stress proof metal for spindles and 8 bolt hubs.
- Heavy duty undercarriage made with heavy wall steel tubing
- 2 tooth spring loaded injector for injecting your liquid manure
- Open/closed indicator for rear valve
- Air cooled pump has 192 cubic feet of air at 10 HG capacity Pump has built in oiler for oiling pumps 4 vanes
- Air precleaner keeps dirt and dust from entering pump for less wear
- Large moisture trap to catch foam or liquid from entering pump for longer pump life Trap has sight glass and 1 inch drain valve for draining trap
- 6 inch tapered brass side valve for easy loading
- Vacuum/Pressure gauge on top of trap where it is easy to see from tractor seat or from ground
- Top shut off trap with 6 inch shut off ball stops vacuum when tank is full. (Top trap has removable lid with relief valve.)
- Tank also has float level indicator and sight glass in front of tank

We stock for your needs: hoses 3, 4 and 6", brass valves, couplings, traps, pumps & tanks

We have on hand used vacuum tanks for building your own spreader. 2900 gallon tank \$975