


Thanks and Congratulations to Tennyson and Alice Martin



Lebanon, PA

On their all new **CHORE-TIME** caged layer system with
CHORE-TIME Ultraflo feeding system
(125,280 layer capacity)



54'-8" x 616' High rise layer building with 40' x 60' egg packing and cooler room




Two Chore-Time 24.7 ton Next Generation storage bins with transfer auger to Chore-Time weigh bin Chore-Time feed screener and Chore-Time dual auger system



CHORE-TIME 4 high Duracage with push-in doors and cage stands 8 ft. on center.

Chore-Time variable speed rubber finger collectors to a 24 inch PVC rod conveyor and 100 CPH Diamond farm packer.


Val 45° nipple waterers

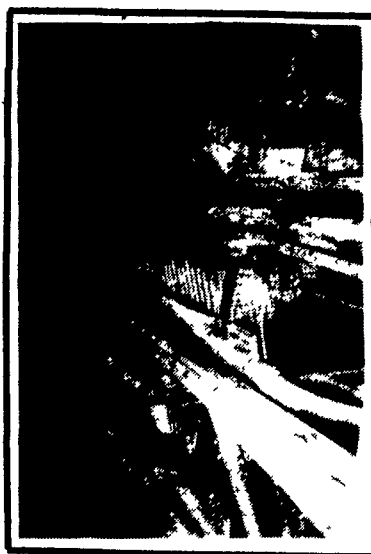

Notice egg trays are 3 1/4 inches away from birds to reduce jam-ups, and lip is two inches high to keep eggs from fall out.

CHORE-TIME Galvanized after welded, cage floor. Chore-Time New style one inch higher Ultraflo feed trough.

Chore-Time 45° step rail brackets with 2x4's supported every 8 ft.

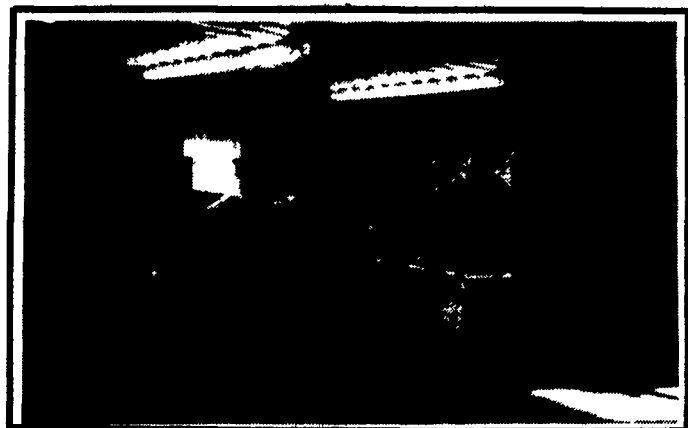

New Diamond 100 CPH farm packer built in floor hoist for egg carts or pallets




It's another **ULTRAFLO®** by

CHORE-TIME

Layers, Pullets, Broiler & Turkey Contracts Available.
For free estimates and more information contact: 1-800-673-2580

EQUIPMENT BY:



Northeast Agri Systems, Inc.

Flyway Business Park
139A West Airport Road
Lititz, PA 17543
Ph: (717) 569-2702

1-800-673-2580

Store hours Mon-Fri 7:30 to 4:30
Sat 8:00 to Noon
24 Hr 7 Day Repair Service



FEDERSBURG, MD.
308 UNIVERSITY AVE.
(Formerly Long Lumber)
1-800-735-6361

STORE HOURS
7:30 A.M. - 4:30 P.M.
Monday-Friday
Sat. 8 A.M. - 11 A.M.

BUILDING BY:

KING
CONSTRUCTION CO.
601 Overly Grove Road
New Holland, PA 17557
717- 354-4740