





on their all new 125,280 Layer CHORE-TIME. Cage System with CHORE-TIME Ultraflo Feeding System

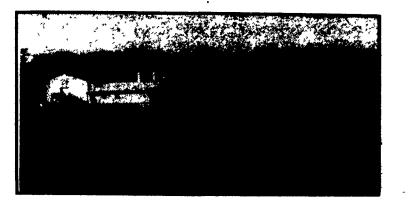

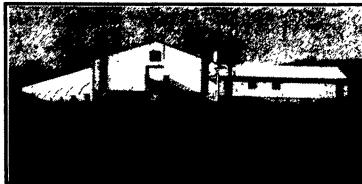

54'-8" x 612' High rise building with 36' x 60' egg packing and cooler room. Building features brown-out inlet hood and treated lumber decks at bird load out doors.




Chore-Time 4 high Duracage installed with plywood walkways between cage rows. Continuous 2 x 4 step rails and cart guides installed on heavy galvanized brackets protect cages and allow easy access to top tier.



Val 45 degree nipple drinking system keeps nipple out of cage without using wire stands. Chore-Time Duracage features heavy two piece construction and optional push in doors. Ultrafio feeding system saves feed and improves performance because of high speed delivery (80 feet per minute) and high lip trough. When feeders run birds do not pick over feed to select corn and birds can not rake and pile feed when feeder stops.



Chore-Time rubber finger collectors with variable speed control system have no extra transfers. Eggs stay on the egg belt until they reach the cross conveyor.



Triply ceiling is smooth and washable. Modern Ag perimeter inlets with stainless steel hinges are installed with control rod mounted on the wall below the inlets. Because the rod stays at the same temperature it does not grow and shrink like it would if installed behind the inlet. This helps keep the inlet adjusted when outside temperature changes.

