


MARTIN

Liquid Manure And Feed Lot Equipment

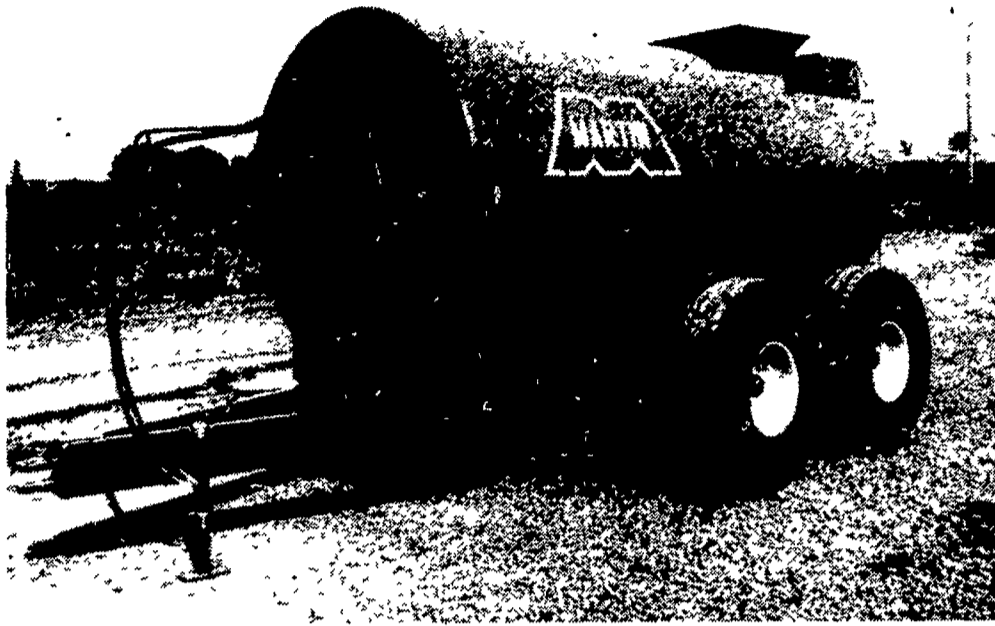


MODEL 2250 GAL.

The following features are standard equipment on Martin's 1500 gal. - 2250 gal. - 3300 gal. - Tank Spreaders.

- Heavy duty internal chopper type auger.
- Includes Hydraulic cylinder and all hoses.
- Includes PTO shaft, jack and ladder.
- Spreaders built and designed to handle manure from free stall barn without adding any liquid.
- Rear fan built to handle spread of 45 to 60 feet liquid or thick manure.

Optional Equipment Available

- Custom Built Open Top Spreaders designed for scrape-off ramps or loading in with loader tractor.
- Braking system
- Also - truck mount spreader 2250 - 3300

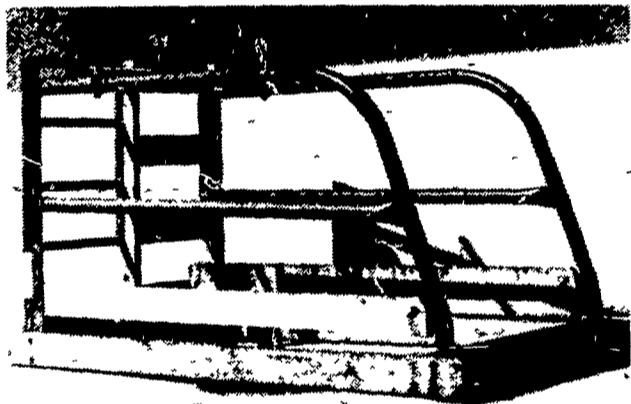


**LASTING QUALITY
FREE STALLS**

High quality material with many techniques that mean greater strength and durability, makes Martin Free Stalls the choice among dairymen, everywhere.

Constructed of High Carbon, Rust Resistant, 2 $\frac{1}{2}$ -inch O.D. heavy, steel tubing—each stall is securely welded to rear end channels and the side support. Green, rust preventing paint.


The standard Martin Free Stall is seven feet in length and 48" in height. Other customarily used sizes are 6'6" and 7'6". Rust sleeve standard equipment.

- Also Available:
- Free standing stalls
 - 3 models tie stalls
 - 1 $\frac{5}{8}$ " tube hot dipped galvanized

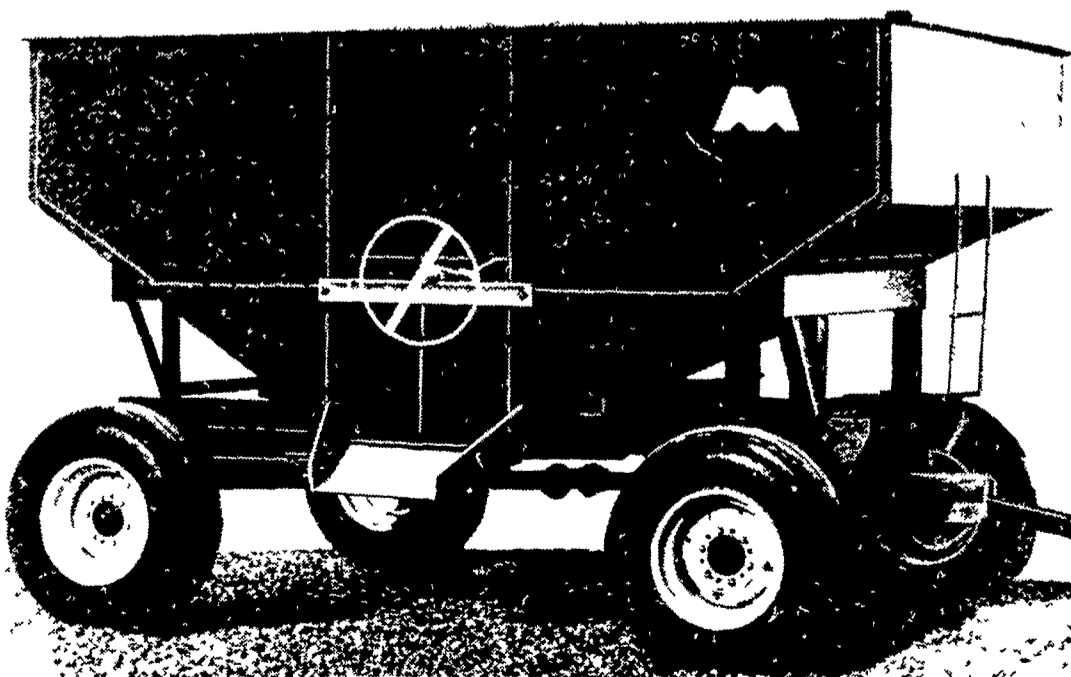

GRAVITY BOX


DURABILITY starts with fine materials—14 gauge prime steel for sides, ends and bottoms; a heavy gauge formed steel frame. Oak sills readily adapt to the heavy duty wagon gear selected. Diagonal reinforcement and the ladder at one end give strength.

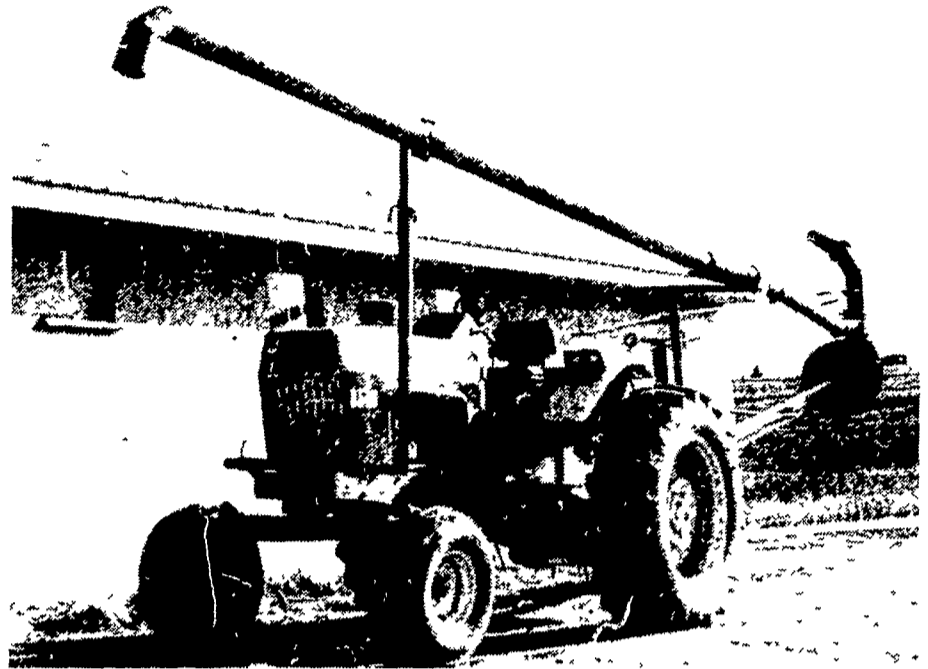

3 PT. HITCH LAGOON PUMP

The following Features are Standard Equipment on Martin's Lagoon Pump

- 3 pt. Hitch Hookup, 20 ft. length, optional lengths available
- PTO shaft, 540 RPM, shear pin protected
- Impeller - 24" Diameter
- 6" Discharge and Filler Pipe
- Directional Valve—Specially designed to seal under pressure
- Pump Includes all mounting Hardware and Hydraulic Cylinder
- Heavy Duty 4" tubular Construction
- Split Babbit Bearing Installed on outside Tube to assure easy maintenance.

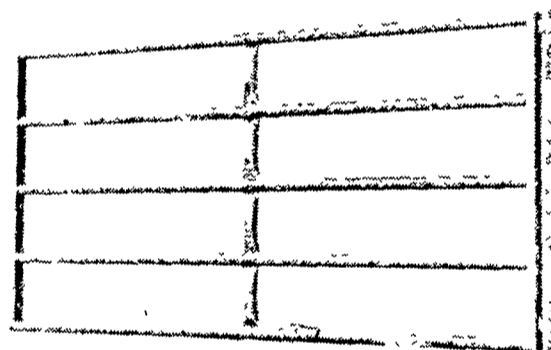

**TUBULAR STEEL
CATTLE GATES**

This excellent five-bar gate measures 48-inches in height, and is available in stocked lengths from 8 to 16 feet—in increments of 6 inches or one foot. Painted with zinc chromate based green paint to harmonize with fencing. Constructed of 14-gauge, High Strength 2-inch tubing securely welded to the end channels and vertical braces. Complete with latch bar for use with Martin Gate Latch and hardware that matches the optional hinge plate.



CUSTOM PRODUCTS PHONE (717) 933-4151

MARTIN
MANUFACTURING COMPANY
Myerstown RD 3, Pennsylvania
17067

Contact local authorized Martin dealer in your area

- Chambersburg - Martin Equipment - 717-263- 9111
- Intercourse - C. B. Hooper - 717-768-8231
- Jersey Shore - Tom Dunlap - 717-753-3196
- Jerseytown - Tri County Farm & Home Supply - 717-437-3440
- Milton - Landis Farmstead Automation - 717- 437-2375
- New Berlin - John Houck - 717-524-4951
- Rome - Histsands Farm Service - 717-744-2371