

Lancaster COUNTY DHIA MONTHLY REPORT

A registered Holstein cow owned by Paul V. Nissley, Holtwood, completed the highest 305 day lactation. Tina produced 21,260 pounds of milk, 913 pounds of butterfat with a 4.3 per cent test. Second high lactation was completed by a registered Holstein cow owned by Don Ranck, Paradise. Pin produced 23,961 pounds of milk, 898 pounds of butterfat with 3.7 per cent test in 305 days.


The herd of Jacob S. Dienner, Gordonville, had the highest daily butterfat average. His herd of 34 registered and grade Holstein cows averaged 62 pounds of milk, 2.36 pounds of butterfat with a 3.8 per cent test. The herd of John E. Fisher, Gordonville, placed second with 32 registered and grade Holstein cows averaging 63.9 pounds of milk, 2.30 pounds of butterfat with a 3.6 per cent test.

OWNER - BREED	AGE YR.NO.	DAYS IN MILK	LBS. MILK	% FAT	LBS. FAT
Paul V. Nissley					
Tina	RH 4-1	305	21,260	4.3	913
Don Ranck					
70 Pin	RH 5-7	305	23,961	3.7	898
41 Gee	RH 6-9	305	21,678	3.1	681
Ivan Z. Martin					
Janice	RH 3-6	305	20,458	4.4	893
John P. Lapp					
Lin	RH 6-6	305	20,662	4.3	893
Glenn C. Hershey					
Noreen	RH 7-2	305	24,873	3.5	877
Neileen	RH 3-10	296	19,461	3.8	741
Robert C. Groff					
Quill	RH 7-8	305	19,317	4.5	860
Annie	RH 5-3	305	16,146	4.5	721
Rufus G. Martin					
30	RH 8-5	305	24,940	3.4	855
5	RH 3-7	305	18,635	3.8	708
Jay C. Garber					
Keyarta	RH 6-0	305	20,780	4.1	854
Nkhbrta	RH 3-2	305	18,099	4.5	821
Misdale	RH 3-4	305	15,845	4.5	717

Kiwozer	RH 5-9	305	14,800	4.6	678
Nexviol	RH 2-10	305	17,791	3.7	667
Ljaolly	RH 4-6	305	19,839	3.3	650
EHIS D. Kreider					
R 17	GrH 11-8	303	21,548	3.9	849
56	GrH 7-7	305	20,358	3.6	741
81	GrH 4-8	305	21,415	3.3	714
75	GrH 5-0	305	19,513	3.4	668
John W. Martin Jr.					
10	RH 5-5	305	20,353	4.2	848
Amos M. Stoltzfus					
Laura	RH 7-11	305	24,268	3.5	838
Glenn P. Book					
Delores	RH 5-6	305	23,331	3.6	835
Samuel F. Sauder					
Molly	RH 5-7	305	20,260	4.1	835
Tina	RH 4-4	305	18,903	3.7	701
Ammon E. Reiff					
Dinah	RH 5-0	305	21,613	3.8	829
Fanya	RH 4-6	293	17,944	4.5	805
Rhelda & Lynn Royer					
Pat	RH 6-5	305	22,451	3.7	824
Desi	RH 5-8	305	21,579	3.8	820
Joy	RH 3-6	305	19,689	3.5	685
Abram M. Stoltzfus					
Mamie	GrH 3-11	305	21,503	3.8	822
Beth	GrH 11-3	305	20,661	3.5	733
Lucky	GrH 6-9	305	15,553	4.5	695
Ginny	GrH 6-11	297	17,317	3.9	673
Esther	GrH 3-8	305	17,511	3.8	660
Rosetta	GrH 6-11	305	19,587	3.3	653
John M. Harnish					
Sonya	RH 4-8	305	19,554	4.2	821
Paul E. Martin					
Pet	RH 9-0	305	18,679	4.3	806
Earl S. Weaver					
Brooks	RH 7-7	305	24,371	3.3	804
Eva	GrH 6-5	305	20,664	3.3	691
Anna	RH 8-10	232	19,083	3.5	672
Roy & Kennet Stoner					
103 Viol	RH 5-11	305	20,550	3.9	799
Nelson H. Wenger					
Paula	RH 7-3	305	21,957	3.6	797
Cotton	RH 2-8	305	15,348	4.7	722
Vanessa	RH 2-4	305	17,885	4.0	709
Earl Smoker					
Petty	GrH 5-5	305	16,100	5.0	797
Donna	RH 5-2	305	17,199	4.2	716

Lenewood Farm					
Zora	RH 6-4	305	22,102	3.6	796
Edgefield Farms					
Sara	RH 5-1	305	20,618	3.9	796
Edgefield Farm No. 2					
Jody	RH 4-1	305	18,186	4.4	796
Nora	RH 3-10	305	20,327	3.8	781
Donald M. Eckman					
29	GrH 8-5	305	21,672	3.7	792
21	GrH 3-8	305	19,619	3.5	683
Robert L. Shelly					
Beth	RH 8-11	305	19,732	4.0	789

(Continued on Page 91)




mfs HOPPER BINS

AVAILABLE IN FOUR DIAMETERS:
15' - 12' - 9' - 6'

CAPACITIES FROM 80.9 TO 2.9 TONS

- All galvanized steel construction for rugged, long lasting service
- Specially formed hopper and roof edges for weather-tight seams and added strength
- All seams double caulked.
- Large range of capacities-3 to 80 tons (118 to 3,253 bushels).
- Weather-tight. Ground controlled roof hatch.
- Roof ladder standard on all bins.
- Heavy steel body panels pre-punched and color coded for easy assembly.
- Steel bolts have the unique MFS sealing washers for solid weather and air-tight fastening.
- Galvanized legs are of heavy structural steel angle for strength and stability.
- Full clean-out boot for 4" and 6" augers-eliminates most bridging and sticking. Has flow control valve and provides auger adjustment from 5° below to 60° above horizontal.
- The 15' diameter bin is especially designed for wet corn holding and is supplied with the popular MFS grain bin roof.

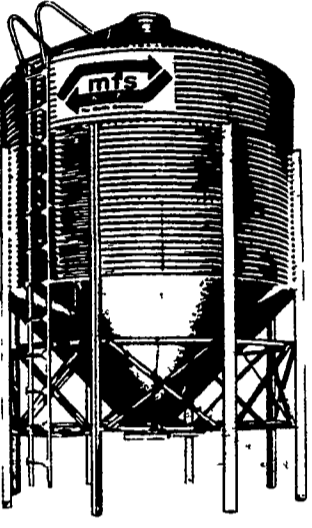

"The World's Grainkeeper"
modern farm systems, inc.
WEBSTER CITY, IOWA

THOMAS A. BACHMAN
2501 Fallston Road
Fallston, Md. 21047
(301) 557-7529—838-7478

TRY A CLASSIFIED AD!




SPECIAL AUGER PRICES MONTH OF APRIL

FAMOUS NECO QUALITY...

SIMPLIFIED DESIGN...


PTO



PTO DRIVE FEATURES

- Gearbox specifically designed for PTO
- Simple low maintenance design
- Can be powered from either side
- Shear clutch for extra protection
- PTO carrier is standard equipment


ELECTRIC



ELECTRIC DRIVE FEATURES

- Safety shield over drive belt(s)
- Easy motor mount adjustment
- Simplest drive mechanism available

GASOLINE



GASOLINE DRIVE FEATURES

- Rugged extra heavy motor mount
- Self leveling for different angles of operation

CAPACITIES

6" - UP TO 1500 BPH

8" - UP TO 3000 BPH

IMPORTANT DESIGN FEATURE

NECO TRANSPORTS are designed to give four (4) times more tube wear — the ANTI-TWIST connecting sleeves and extension tubes allow the tubes to be rotated four times — 90° apart

TUBE CAN BE ROTATED EITHER DIRECTION

LOCATING BUTTIN

LOCATING HOLES

LOCATING BUTTIN

TROLLEY STOP LOCK Locks transport carriage and auger together while loading

OVERFLOW CAP prevents spill if overflowing

TROLLEY CARRIAGE with a cast roller for smooth operation

HEAVY CROSS-BOLTED CONNECTING SHAFTS 6 Units — 1 1/2 Dia 8 Units — 1 1/2 Dia

OVERLAPPED FLIGHTING Gress stronger and smoother connectors for more capacity

FLIGHTING MOUNTED ON 1 1/2 Diameter tube on 6 Units 2" Diameter tube on 8 Units

TRANSPORT CARRIAGES ARE EXTRA WIDE

15" WHEELS (tires not furnished)

WHEELS ARE MOUNTED ON TAPERED ROLLER BEARINGS on 8" units 42" and over use 5" 42" units All other units have standard ball bearing hubs.

EXPANDED SPACE around the gear box gives ample space for grain to flow around

SPECIAL GEAR BOX with double seals and tapered thrust bearings

SAFETY WINCHES

HOPPER is standard equipment

PREASSEMBLED DRIVE SECTION (11 gears mounted inside on full nut connections) EXTRA HEAVY FLIGHTING ON INTAKE AUGER

PROTECTIVE SAFETY CASE AND BEARING CASE WITH WINCH are standard equipment

TRUSSING SUPPORT AND 3/4" TRUSS RODS

57-67 Models — shown

42-52 Models — Single Truss

27-37 Models — No Truss rods

SIMPLE DESIGN MEANS A MINIMUM OF MAINTENANCE

- ELIMINATES LINE SHAFTING AND BEARINGS
- NO CHAIN AND SPROCKETS TO WORRY ABOUT

8" - 62 ft. long, PTO Drive, Set up complete with steel hopper, 5 ft. section flexible pipe, tires & tubes.

FOB Our Yard \$1900.00

8" - 57 ft. long, PTO Drive, Set up complete with steel hopper, 5 ft. section flexible pipe, tires & tubes.

FOB Our Yard \$1825.00

6" - 47 ft. long, PTO Drive, Set up complete with steel hopper, 5 ft. section flexible pipe, tires & tubes.

FOB Our Yard \$1225.00

LOUCKS GRAIN EQUIPMENT INC.

Box 216, Rd 12, York, PA 17406
East Prospect Road Route 124
Phone 717-755-2690

Full Line Dealer In: Wyatt augers, York bucket elevators, Burrow moisture testers, and grain cleaners.

