A20—Lancaster Farming, Saturday, March 1, 1980

HARD WORKIN', TOUGH HAULIN' - that's O

Scissor & H by OMAHA STANDARD

Omaha Standard Hoists Include These Quality Features...

Inside Cab Control

All Omaha Standard hoist models are standard doubleacting (power-up, powerdown) and are sold complete with inside the cab dashboard controls and bracket Pump control cables are non-corrosive and designed for allweather use Hoists are offered complete with pump, hydraulic hoses and fittings, pump driveline and mounting components



The Omaha Standard Body Propis used to support an empty truck body in the raised position to allow maintenance and service work to be performed safely The Body Prop. satisfies current OSHA regulations One Body Prop is supplied with each single cylinder hoist except the

Model 629-S DA The 629-S DA and the other higher capacity hoists are equipped with two Body Props




All Omaha Standard cylinders are pressure-tested and cycletested before installation Ground and polished, chromed rods insure long cylinder life The Super 529 DA, 61 DA and 629-S DA hoists use cylinders featuring a threaded_end-cap to


give additional reliability and resistance to shock loads


Pump, Reservoir, Control Valve and Guard

Integrated in a single compact unit the standard piston pumps reservoirs and control valves are built for highpressure double-acting applications Each pump supplies pressure up to the maximum operating pressure for each model hoist and is equipped with internal relief valves. The



control valve lever guard and pump controls meet existing OSHA regulations Pumps with an additional control valve for auxiliary equipment are available as options

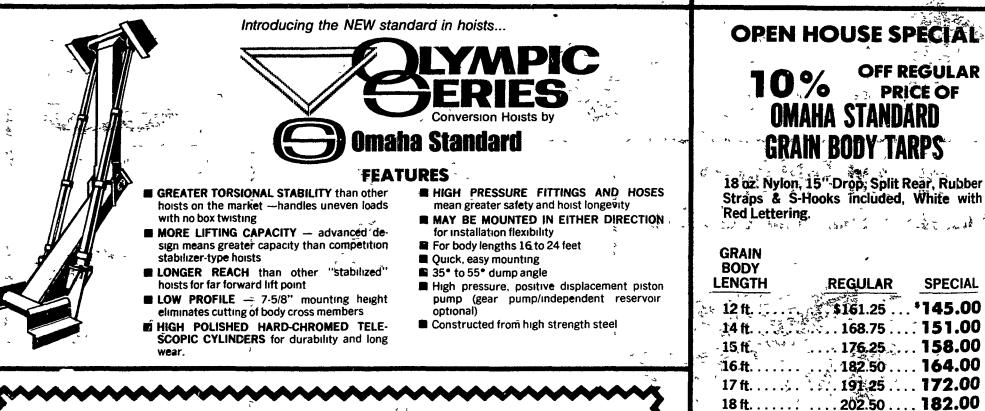



SCISSORS

CONVERSION

HOISTS

Omaha Standard's single cylinder scissors hoists handle a range of bodies from 8' to 20' for loads from 4 to 25 tons. All hoists are double acting (except electric gear pump models.) Twin cylinder hoists will handle virtually all heavy grain loads under bodies from 14' to 24' for loads from 14 to 34 tons. Critical components of all 14 to 34 tons. Critical components of all Omaha Standard hoists are fabricated from special high-strength low-weight steel.

All Omaha Standard hoists are sold with the Omaha Standard Body Prop and a pump lever control guard which comply with all existing state and federal OSHA regulations

OFF REGULAR GRAIN BODY TARPS

18 oz. Nylon, 15" Drop, Split Rear, Rubber Straps & S-Hooks included, White with

an

on O

sizes

roll fi

side

strer

warp

flar

es gra

ht sea

🖉 🖓 xıb

and.

bld-dc Nardw

grea

nti-sr

-22 J .m 4 lick SPECIAL iy is p ath Or Standa llque-r vente



Hoist Combination 25% Down Payment Required **Open House Week Only March 3-8, 1980**

208.00 231.25

20 ft. 212.50 **191.00**

Remember: These are top quality tarps. We also have less expensive tarps in stock.

If you are looking for a **Truck Body / Conversion** Hoist that'll get your jobs done, see us at Farmersville Equipment for Experienced and Professional Help.





POWER TAKE-OFFS

IN STOCK

We take pride in our products...COME ALONG FOR THE PRIDE!



YOUR OMAHA STANDARD DISTRIBUTOR SERVING FARMERS IN PENNSYLVANIA, NEW JERSEY, DELAWARE, MARYLAND, VIRGINIA, WEST VIRGINIA & NEW YORK



MARCH 3-8