

AMCO AND CASE

DOUBLE OFFSET TANDEM

Sizes 9'3", 10'6", 12'0" and 13'6" in Stock

STANDARD SPECIFICATIONS

AXLES	Four 1½ square high-carbon cold rolled steel	WRENCH	1 for gang bolt
DISK	22 x 3/16 Plain**	BEARINGS	Protect-O-Shield regreasable ball type, toggle mounted
BLADES	Diminishing with 2-16 feathering blades on rear gangs	ANGLE	Adjustable 18°-22° Front 17°-21° Rear
SCRAPERS	High-carbon replaceable blades on heavy-duty shanks mounted with grade 5 bolts on high-carbon angle iron bars	WEIGHT	106-120 lbs per blade 296-337 lbs per foot
WHEELS	2-15 x 8 six bolt	TRANSPORT WIDTH	Width of cut plus 18 inches
CLEVIS	Reversible	DISK SPACING	9 inches

Cutting Width	No of Disks	No of Bearings	Disk Size & Type	Approx DBHP Required	Approx Shipping Wt
9	26	8	22 Plain	50-70	3080
10 6	30	8	22 Plain	55-75	3330
12 0	34	8	22 Plain	60-80	3580
13 6	38	12	22 Plain	65-85	4220



new Protect O-Shield™ bearing features an exclusive protective shield to enhance the life and protect its triple seals from damage keeping you out of the shop and in the field

ELIMINATE BLOWN SEALS
Too much pressure in your grease gun can easily blow out the seal in the even the finest bearing. Protect O Shield™ won't let this happen. It secures your seal in place.

NO MORE WRAP DAMAGE
Rice straw wheat stubble baling wire — all will tear up your bearings when wrapped around your harrow's axle. Keep it out with Protect O Shield™.



SHOCK ABSORBER GANG RISERS
AMCO's Challenge to Rocks and Stumps

Rocks and stumps in your fields are less of a problem with AMCO's Shock Absorber Gang Risers.

AMCO's Shock Absorber Gang Risers allow the gang to move up and back when striking an obstacle while you plow.

Couple the Shock Absorber Gang Riser with AMCO's regreasable triple sealed Protect O Shield™ bearings and you've got an unbeatable combination for work in rough terrain.

AMCO's Shock Absorber Gang Riser and Protect O Shield™ won't move rocks and uproot stumps but they will help prevent harrow damage. And both are available on most AMCO Tough Tillage Tools.

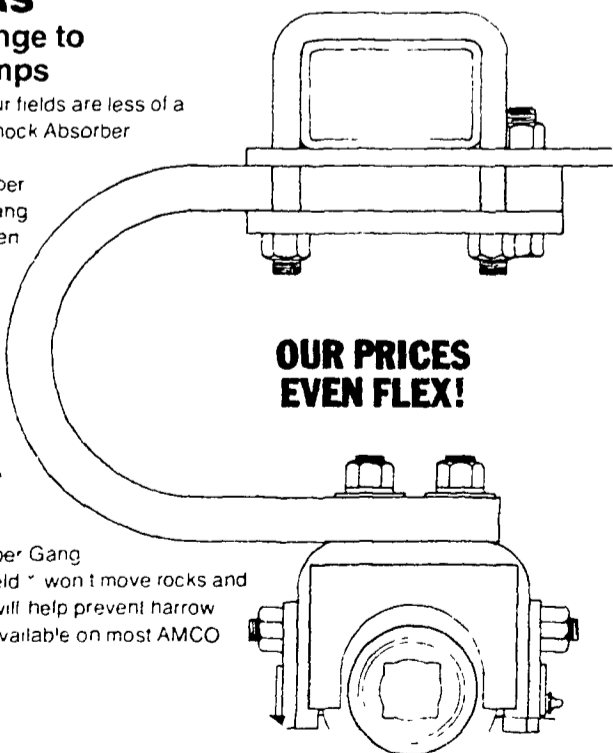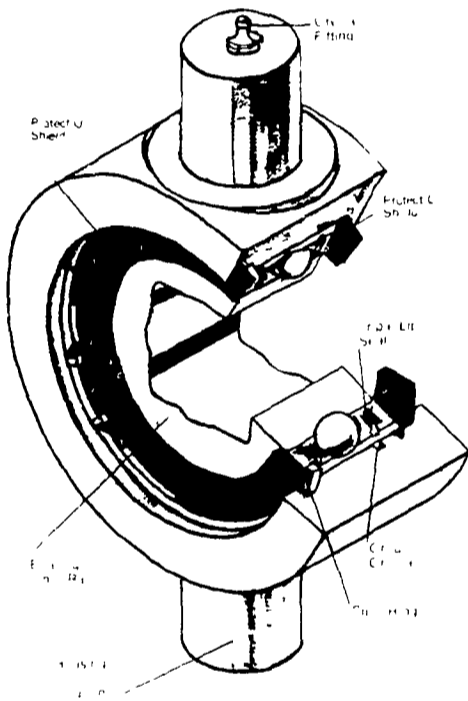


OUR PRICES EVEN FLEX!

AMCO

WHEEL OFFSET HARROWS


WOF-16 WOJ-16

For More Accurate Leveling, AMCO Has Added A New Spring Leveling Device To The Tongue.

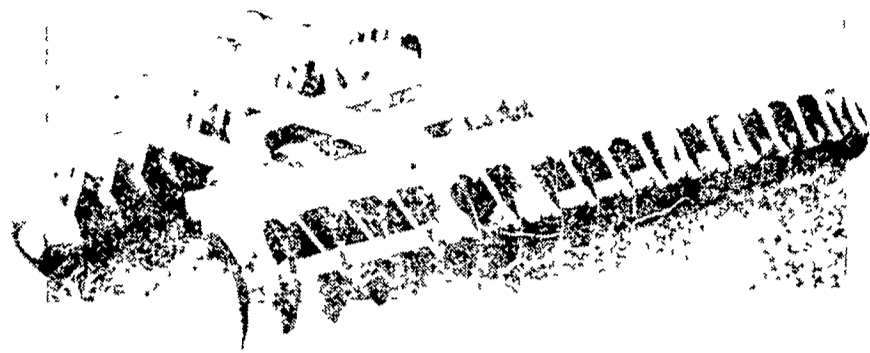

SPECIAL OF THE WEEK

New Heavy Duty Amco 16'6" cut offset disk harrow w/24x½" blades, smooth, 9" spacing, wt over 8000 lbs Regular price \$8800 Knock down FOB our lot

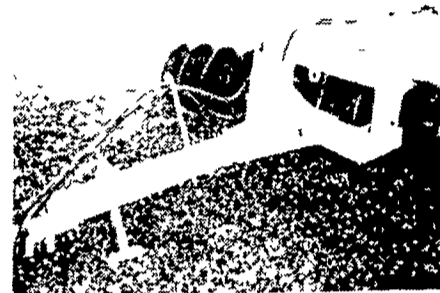

1 Only **\$5360**

FOLLOW THE LEADER

91 tons per hour* now that's capacity!

It's the largest capacity forage harvester available today — the Gehl 1200. Yet it's a light running efficient machine that works with tractors ranging from 80 to 225 hp.

If you've got a big job to do the 1200's for you. It cuts through the heaviest windrows and the tallest corn to deliver uniformly cut feed.

The 1200 is built for big performance. With nine hard working knives and our unique built-in hydraulic knife sharpener. A

giant 25½ inch cylinder. A full 129 square inch throat area. And our patented 24 inch spinner that moves material to the blower at nearly 40 mph with no cross augers to plug.

Add capacity matched attachments 2 or 3 row corn heads hay pickup snapper head.

Then tackle your biggest harvests at up to 91 tons per hour! See the 1200 — the leader in forage harvesters — at your Gehl dealer.


Gehl Company West Bend Wisconsin 53095



- Hyd. Spout Control
- Electric Cap Control
- Cylinder & Hoses For Header & To Operate Hydraulic Sharpener
- 3 Row Corn Head Attachment
- Flotation Tires

1 ONLY IN STOCK AT OLD PRICE \$11,985

NEW 9 FOOT GEHL MODEL 1090 HAYBINE

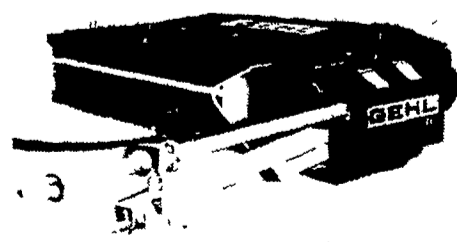

LESS LIFT CYLINDER AND HOSES, SET UP

1 ONLY \$4,600



BINKLEY & HURST BROS.

133 Rothsville Station Rd., Lititz, PA 17543 Ph: (717) 626-4705
Business Hours: Mon. - Fri. 7 AM to 5 PM; Sat. 7 AM to 11:30