

Lancaster Farming, Saturday, October 16, 1982-A11

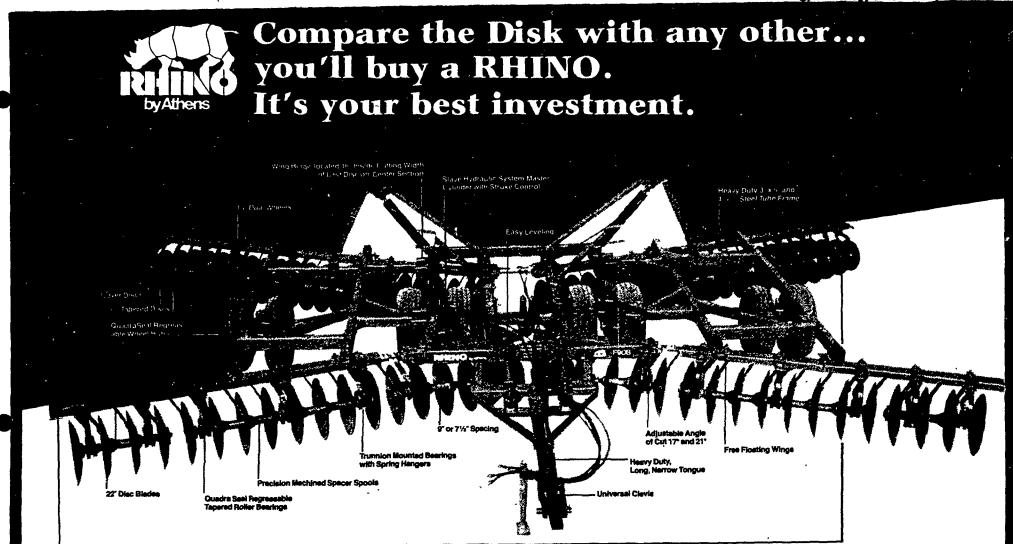

NOTICE: NEVER! NEVER! BUY A DISK HARROW BEFORE YOU CHECK THE UNMATCHABLE SUPERFOLD EXCLUSIVE AT OUR BEST PRICE!


Very Important Features You Should Consider:



Spring Bearing Hangers reduce shockloads to the blade, axles, bearings and frame when working in fields with rocks or stumps. The Rhino 1" x 2" spring bearing hangers provide maximum strength, add protection, and reduce downtime expenses. The Rhino Quadraseal gang bearings are trunnion mounted to the spring bearing hangers to allow the gangs to flex freely without undue stress being placed on the gang axle.



Guaranteed Quadraseal Bearings. The unique Rhino double-row tapered roller bearing is guaranteed for two years and provides greater life and dependability than competitive bearings. The Quadraseal double row tapered roller bearings offer more capacity than single row ball bearings. tra canacity, the prot loading --- even when discing at maximum angle - is virtually eliminated. The double-row bearing has a triple-lip seal that runs on a hardened, polished surface and has a heavy steel seal protecting washer to protect the seal from damage due to wire and trash. Between the steel washer and the seal is a cavity filled with grease - an additional sealing element against dirt. The double-row tapered roller bearing is mounted into a rugged cast iron housing which is trunnion-mounted to a spring bearing hanger. As the trunnion-mounted, bearing housing pivots, the bearings and axles remain in perfect alignment and the gangs roll freely. This bearing package is designed to give years of trouble free, long life operation. it's The Best!



Slave Hydraulics — Adjustable Depth Control. Slave hydraulics provide simultaneous action of all cylinders when raising or lowering. This action assures you of a uniform plowing depth, no matter what the soil conditions might be. Plowing depth can be set precisely by adjustment of a depth stop on the master cylinder.


Disc Spacing. The Flex 90B is available with $7\frac{1}{2}$ " or 9" disc spacing or a combination of 9" front, $7\frac{1}{2}$ " rear. All gang components are shipped completely assembled. No matter what your tillage needs are, the Flex 90B can be equipped to handle your requirements.

• Heavy Duty Scrapers • Tapered Discs/Cover Discs. Three disc blades of step-down pattern from 22" to 20" to 18" and the 16" cover disc, on the rear gangs, give you a smooth, level, ridge-free job. Anottier RHINO advantage. it's all standard equipment.





Wing Flotation. Rhino Flex 90B wings are hinged so that they provide uniform weight distribution and flex freely to follow the ground contour for uniform plowing. For better side-to-side leveling, the wing hinges are mounted 16" inside the center section to give a more parallel flexing action between center section and wing disc blades.

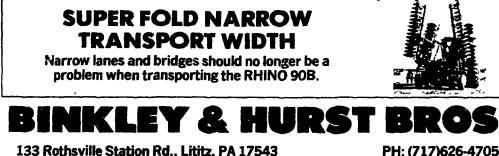

3 Rothsville Station Rd., Lititz, PA 17543 PH: (717)62 Business Hours: Mon.-Fri. 7 AM to 5 PM; Sat. 7 AM til 11:30 AM

