



Introducing the Soybean & Grain Drill. Built Marliss Tough!

Marliss Soybean & Grain Drill marries your seed with the soil and gives them maximum opportunity to grow.

Unique Opener Hitch eliminates leaning

Extra Heavy Duty Down Pressure Springs

Large Capacity Fully Welded Seed Hoppers

No Grease Fittings reduce maintenance

Unsurpassed Seed Depth Control

Sizes: 7', 10', 14', 15', 20', 27' and 30'

Versatile Openers can be adjusted from 6 to 40 inch centers


Fluted Seed Meters are easily adjusted without tools

Double Disc Openers form a seed trench in a true narrow 'V'

Extra Heavy Duty Opener Frame, Press Wheel Frame and Main Frame

Exclusively Designed Spring Seats

Eight Types of Seed Firming and Seed Press Wheels

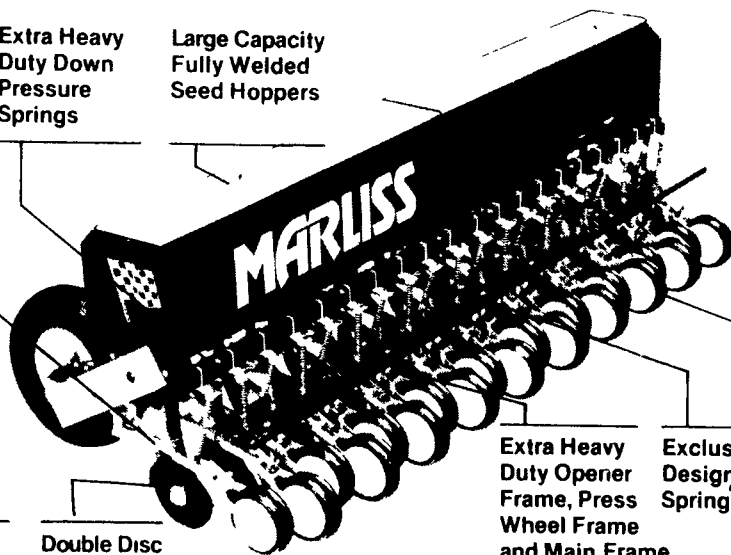

Schoessow offers a new SLANT ON SAVING FEED

VARIOUS MODELS DESIGNED FOR FEEDLOT USE BY ALL LIVESTOCK SIZES

FARMERS FAVORITES
Schoessow's SLANT BAR FEEDER WAGONS
Will feed chopped green feed, silage, round or square bales, regular bales, silage, haylage, chopped hay or ground feed. 40, 10, 25, 20, 15 or 10 foot lengths.

FEED EFFICIENT

ALL PURPOSE FEEDER WAGONS



Schoessow's Versatile SLANT Bar Feeder Bunks



Full Sized Bunk


Easily Movable Trailer Bunk

Mini Bunk For Calves and Sheep

Schoessow's SLANT Bar Feeder Panels

Pick a feeder panel to fit your needs

OR

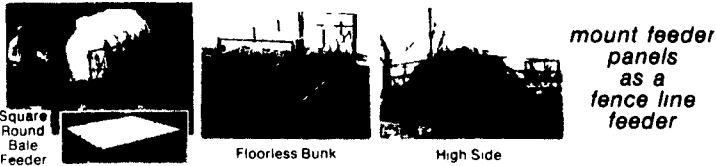

Square Round Bale Feeder

Floorless Bunk

High Side

mount feeder panels as a fence line feeder

Get Proven Design and the Rugged Welded Steel Construction from the Leaders in Feeders

For further information mail this coupon today


Schoessow, Inc.

Name _____
Address _____
City _____ State _____ Zip _____
Phone () _____

IN BRIARCLIFF
ROUTE 2
PULASKI, WI 54162
(414) 833-2698



DEUTZ-FAHR... THE GENTLE POWER IN THE HAYFIELD.

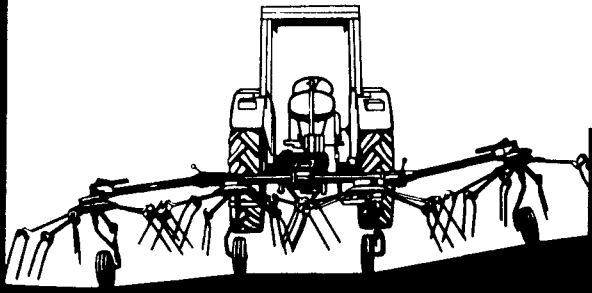


The hay's down and it rained.

The rains may soak your cut hay, but the Deutz-Fahr Centipede Haymaker can save your crop. It lifts, turns, fluffs, spreads and flexes the stems to release moisture fast. You get fast air-drying, save more nutrients and maintain hay quality. Stop in soon and check out the new Deutz-Fahr Centipede Haymaker. See why Deutz-Fahr is the gentle power in the hayfield.



Just say Hart-Carter

Flexible Floating Cutter Bar works its best with a 6-bat HC Pickup Reel

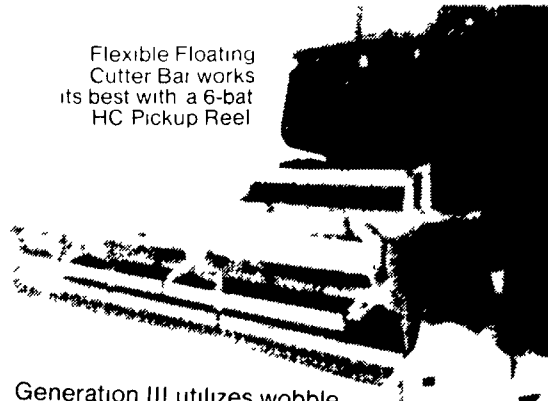

Generation III utilizes wobble box on the combine, for smooth, direct sickle drive. Generation II with Pitman drive available for other combines.


...and you've got the Pickup Reel and Cutter Bar that should save you 2 or more BPA of soybeans.

HC Hart-Carter

1501 111 Ave. Mendota, Illinois 61312
A Combustion Equipment Associates Company
For literature and additional information contact

Rotary Atomizers

by Sprayrite offer...

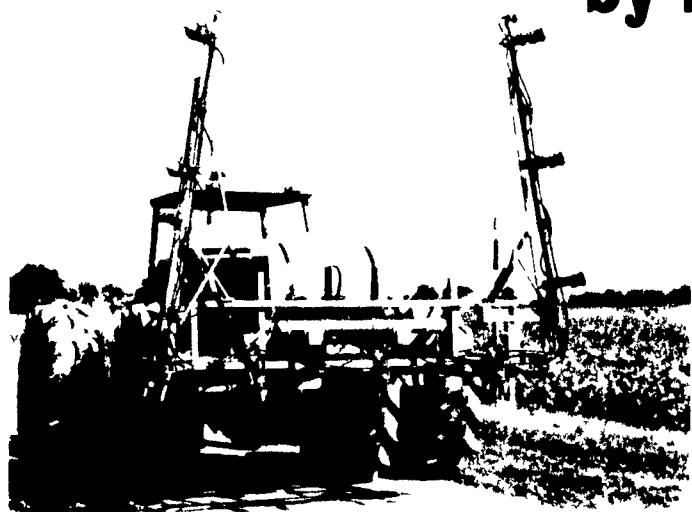

VERTICAL FOLD MODEL S-150 SERIES

The S-150 vertical fold boom is available in swath widths from thirty (30) feet up to forty (40) feet. It is standard with 130-inch center section. For standard specifications refer to next page.




HYDRAULIC BOOM FOLD VERTICAL FOLD

All hydraulic cylinders for boom fold are 2x8. Boom folds into transport cradle for stable transport.




HYDRAULIC DRIVE ROTARY ATOMIZER

Sprayrite Rotary Atomizers are unique. Feed tubes introduce the liquid into the bottom of the spinning cup. This assures uniform feeding regardless of spinner angle. A two positional spinner bracket is standard.




BOOM SHOCKS AND COMPENSATING SPRINGS

No Controlled Droplet Applicator Boom is acceptable without boom shocks and compensating springs. Severe shocks shake the liquid down in the spinning cup. This in turn results in inconsistent control.




BOOM RETURN HOSE MANIFOLD

Whether using a monitor or SIS, the faster the adjusted rate change enters the boom manifold, the more responsive the system. To prevent oil and certain chemicals from separating, the return hose is essential.



HYDRAULIC BOOM FOLD HORIZONTAL FOLD

Plus booms are standard with hydraulic fold. Hydraulic hose is routed to the center panel with connecting hose to the tractor. Tractor ends are not included. Boom folds into adjustable transport brackets.



WING SECTION TAKE UP

For horizontal fold booms, the wing section take up lifts the outer wing sections as it folds. For three point hitch units, when in a raised position, this take up prevents booms from touching the ground.



BREAK-A-WAY HORIZONTAL FOLD (Model S-200)

The S-200 break a way hinge mounts on the mid section of the boom. Two tension springs, one on top and one below, are typical.

Distributed By:

717-249-6720

CUMMINGS & BRICKER, INC.
CBI
Carlisle, PA

BE SURE TO SEE OUR TWO INSIDE EXHIBITS, AS WELL AS OUR OUTSIDE EXHIBIT.