

# C.B. HOOBER & SON INC.


**Krause**  
**Conservation Tillage**  
**HEADQUARTERS**

★  
 INTERCOURSE, PA

**CALL US TOLL FREE**  
 For Parts & Service  
**1-800-233-0165**  
 MD, NJ, DEL, NY  
**1-800-732-0017**  
 PA Only

introduces the  
**RAUSE LANDSMAN<sup>®</sup>**

**The Implement That Can**  
**Cut Time And Labor Costs**  
**By 50%**

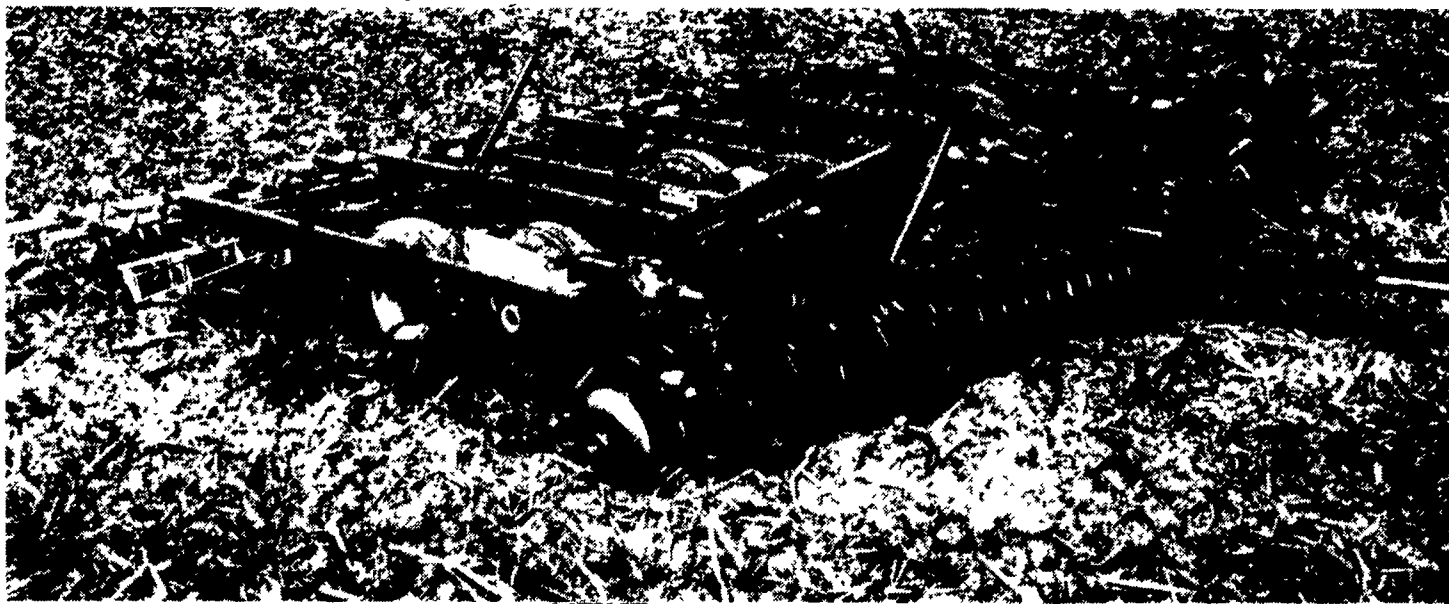

Rigid Models - 13 ft. to 16 ft., Flex Models - 19 ft. to 36 ft.


Preparing a seedbed used to take a lot of time, a lot of fuel, and a lot of money.  
 But now there's a smarter way to get the job done — with a Krause Landsman. It's a unique tillage implement that discs, incorporates chemicals (either deep or shallow), cultivates, and finishes all at once — to prepare your seedbeds with just one pass.

**Built with heavy-duty features like these:**




Choice of two cultivator shanks, both offering 25" of clearance under frame... Spring-cushioned shanks have rear-mounted shock and come with 10" sweeps. Heavy-duty

"K-Tine<sup>™</sup>" shanks feature a high point load to keep sweeps level and still provide aggressive mixing action.

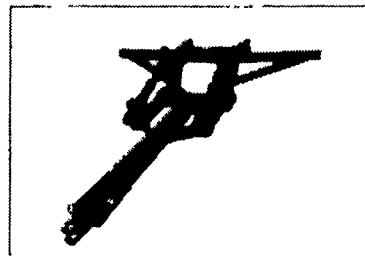


Massive hitch is an extra-heavy design, proven on Krause disc harrows. It is spring-cushioned to reduce frame stress

on uneven ground — a feature most competitors don't offer. Built from heavy 4"x6" steel tubing.

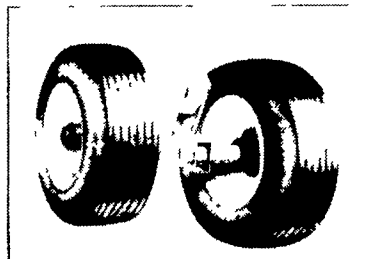

Walking tandem wheels flex over obstacles individually and follow contour of the land for uniform working depth.

Staggered only 18" so you can make tight turns without harmful side loading. Regrease-able bearings.

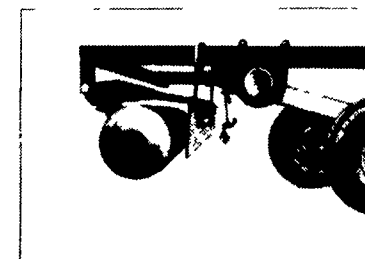

Wide incorporation area is provided in the 42" space between disc gang and front row of field cultivator shanks. Lots of room for

mounting herbicide equipment. Flexible rubber spray shields are optional for high-speed application.

**ALL NEW & USED PRODUCTS BACKED BY HOOBER PARTS & SERVICE**

Radio Controlled Trucks For Better Service



**C.B. HOOBER & SON, INC.**



INTERCOURSE, PA (717)768-8231 — AUTHORIZED UPS STATION — MIDDLETOWN, DE (302)378-9555