PAUL B.

SWWELWEW BWWB

SPRAYING EQUIPMENT

200, 300 and 500 GALLON TRAILER SPRAYERS

STANDARD FEATURES ON TRAILER-TYPE SPRAYER

- All Welded Steel Main Frame
- Adj. Boom Height
- Adjustable Width Wheel Spacing
- Poly Tank
- Selector Valve
- Hitch Jack
- High Crop Clearance Low Overall Height





RAVEN


POLY TANKS

25 To 1600 Gal.

Vertical

and

Horizontal

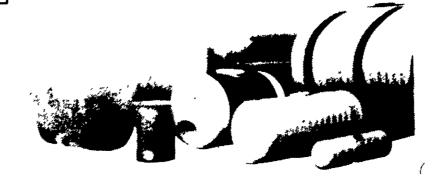





ROUND BALE MOVERS



3-Point Single Prong



The Same Unit Can Be Used With One Prong For Center Of Bale Or Two Prongs For Under Bale.




Front End Loader Forks



- Can be mounted on loader bucket in minutes
- No special attachment needed

TERRA-TRONICS I

Electronic Monitor Measures Working Acres And Ground Speed



- Easy-to-see digital readout
- Easy-to-operate touch sensitive keys
- Easy-to-install
- Operates with any field implement requiring acre measurement pulled, mounted, or self-propelled sprayers, combines, etc.

We Also Stock A Complete Line of



Sprayer Nozzles And Accessories

Hypro

Pumps And Accessories

- Spraver Hose
- Ball Valves
- Nylon Fittings

Pacer Self-Priming Centrifugal Pumps For Agriculture

Features:

- Self-priming to 20 feet (6.1 meters)
- Total heads to 80 feet (24.4 meters)
- Capacities to 166 U.S. GPM (628 liters per minute)
- Built in check valve
- Equipped with 2" female threaded connections, NPT

Ag Miser 3 HP

Ag Miser 5 HP



Visit Us During AG PROGRESS DAYS And See All This Equipment On Display