

1935

M.M. WEAVER & SONS, INC.

50 years

1985



Original Building - Business Started In 1935
Bareville, PA



First Delivery Truck, 1937



New Shop Built In 1947

On May 23, 1935
Martin M. Weaver founded
IMPLEMENT SALES & SERVICE,
buying & selling used
equipment.



Equipment On Hand, 1951



Mr. Henry Ford & Mr. Harry Ferguson




Today we are Known as
M.M. WEAVER & SONS, INC.

No. Groffdale Rd., Leola, PA 17540



MASSEY FERGUSON FARM EQUIPMENT

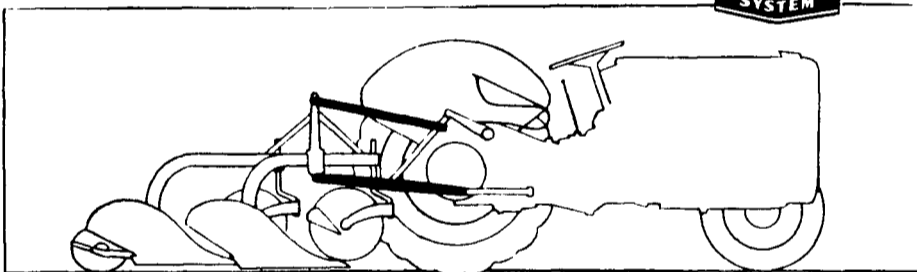

Tractor and implements operate as a unit

**An Historic Partnership That Has Brought
a Revolution in the Production Costs
of Agricultural Products**

Over 40 years ago, Mr Harry Ferguson began development of a new system of farming based on new and fundamentally different concepts of farm power. The tractor and implements which resulted have proved beyond all doubt that Mr. Ferguson's concepts have brought about a revolution in farm production methods.

Mr. Henry Ford saw in the Ferguson System a new and better way of farming. To help give life to the new idea, Mr. Ford applied his manufacturing genius to the principles of the Ferguson System to produce the Ford-Ferguson Tractor on an automotive production line basis.

This historic partnership has made it possible to increase farm profits by lowering farm production costs and, at the same time, remove the drudgery from farm life.


The advantages of Flexible Farming with the Ferguson System apply to the raising of every kind of crop and to all types of soils; to the small farm as well as to the large.



All This Led Up
To The
Massey Ferguson
Tractor In 1952

**GENERAL PURPOSE TRACTOR
Will Meet Your Need**

★
**NEW
IMPROVED
4-WHEEL DRIVE
G. P.**

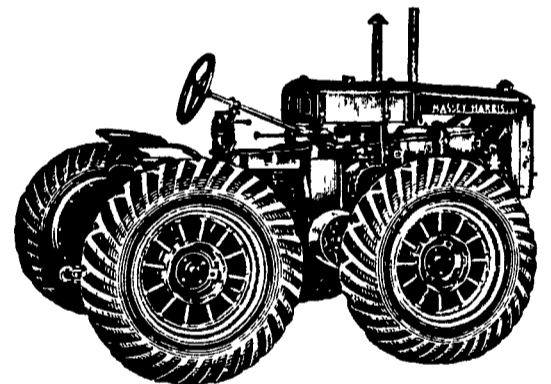

Designed for general purpose work under difficult traction conditions, the new Four Wheel Drive Tractor supplies positive traction 365 days in the year. It farms land too difficult for horses—too rough for ordinary tractors. If your land is hilly, if your soil is muddy or sandy, this is the tractor for you. A favorite with orchard owners everywhere. Each of the four large drive wheels, kept in constant contact with the ground by an oscillating rear axle, takes its full share of the load—Abundant traction—per pound of weight—no skidding—no slippage—no

side draft—no waste power. The new 1936 model features improved effortless steering, efficient master gear oil seals, and a new and more efficient four-cylinder motor that burns all grades of fuel. Supplies power from drawbar, belt pulley, or power take-off. Pulls implements now on your farm or easy-to-change implements described on the following page.

FOUR WHEEL DRIVE SPECIFICATIONS

ENGINE—4" bore, 4 1/4" stroke, four cylinder, 1200 r.p.m. Vertical—valve-in-head—removable cylinder sleeves.
CRANKSHAFT—Double-balanced, heat treated, three bearings, total bearing length, 7 1/16" — 2" diameter.
OIL SYSTEM—Dual system forced feed by gear pump and dip pan splash—Oil filtering device
Transmission—Oil Bath
Rear Axle—Oil Bath
Chassis—Alumite high pressure grease system
IGNITION—High tension magneto with impulse starter
FUEL—Gasoline, kerosene or distillate
AIR CLEANER—Massey-Harris, oil flush type
GOVERNOR—Variable speed, centrifugal type, enclosed and oiled by the pressure system
COOLING SYSTEM—Tubular type radiator, Centrifugal type water pump—18" fan. Mounted on ball bearings and driven by a "V" belt
CLUTCH—Single Plate, Twin Disc, hand operated
BELT PULLEY—12" diameter—6 1/4" crown face, balanced removable, 800 r.p.m.—2513 ft. per min. belt speed

TRANSMISSION—Massey-Harris special Gears drop forged steel—machine cut teeth, carburized and hardened, enclosed in dust proof case, running in oil
TRACTOR SPEEDS—Low 2.2 m.p.h., intermediate 3.2, high 4 m.p.h. Reverse 2 1/2 m.p.h.
BEARINGS—Ball and roller throughout
BRAKES—Two, one for each front wheel mounted on differential
DRIVE WHEELS—Four, 38" dia., 8" face, open or closed wheels are optional
WHEEL BASE—52 1/4"
TREAD—48", 56", 60", 66" and 76"
CLEARANCE—30" between axle and ground All widths of tread
TURNING RADIUS—Inside, without brakes, 6 1/2 ft. With brakes 3 ft.
HITCH—Swinging drawbar
LUG EQUIPMENT—2 bolt lugs furnished as standard equipment
POWER TAKEOFF (Extra equipment) — 545 r.p.m. Standard 1 1/4" spline connection, 1 1/4" special



Copyright 1945, Harry Ferguson, Inc.

**Our Heartfelt THANKS To All Our Friends And Customers Who Made
50 Years In Business Successful. We Are Looking Forward To Meeting
You During Our Open House Sales Days To Help Us Celebrate!**