

Krause tillage

The **^** Saving Place


HOOPER
C.B. HOOPER & SON INC.
INTERCOURSE, PA

★
INTERCOURSE, PA
★
MIDDLETOWN, DE

KRAUSE IS OUTFRONT
AGAIN IN CONSERVATION
TILLAGE SYSTEMS

introducing the


 **LANDKING®**
PRIMARY
COMBINATION IMPLEMENT

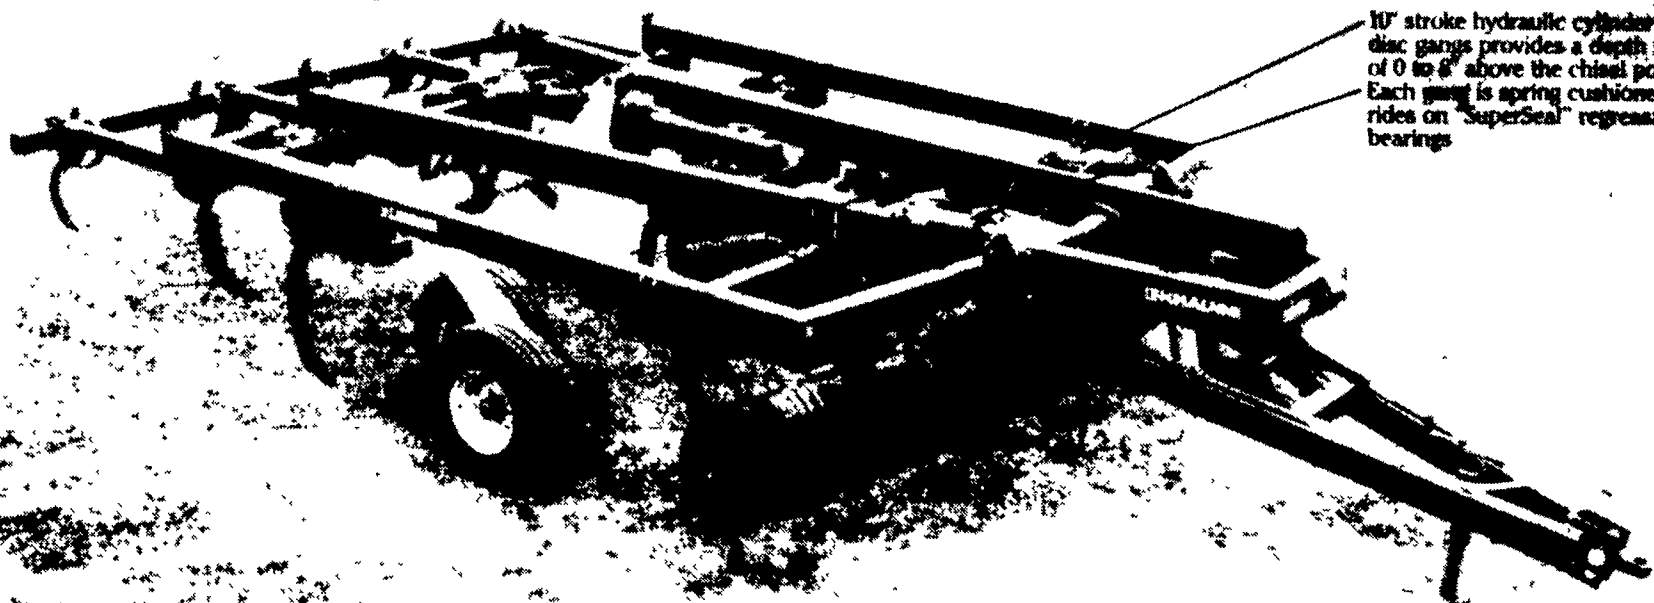

10" stroke hydraulic cylinder on disc gangs provides a depth range of 0 to 6" above the chisel points. Each gang is spring cushioned and rides on "SuperSeal" regreaseable bearings

Heavy-Duty For
Once Over Tillage To:

- Disc Standing Stubble
- Subsoil Compacted Ground
- Chisel And Incorporate Residue
- And Leave The Fields Level
- K-Tine Levelers And Harrows

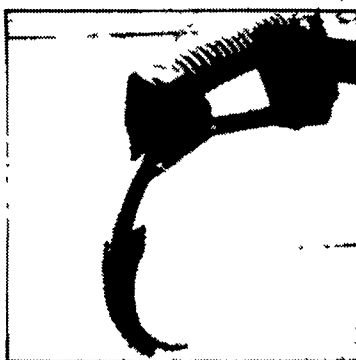

Spring Reset Chisel Shanks Are 2"x1½"x32". 14" Trip Height, A 1250 Lb. Point Load And 10" Max. Working Depth.



Spring Reset Subsoiler Shanks Are 3"x1½"x36". 20" Trip Height, A 1500 Lb. Point Load And 16" Max. Working Depth.

SIZES FROM
12 FT. - 20 FT.

THE KRAUSE LANDKING SAVES
TIME, TRIPS AND FUEL.

HOOPER
C.B. HOOPER & SON INC.
INTERCOURSE, PA
(717) 768-8231

TWO CONVENIENT LOCATIONS


AUTHORIZED
UPS STATION

All New & Used
Products Backed
By Hooper Parts
And Service

HOOPER
HOOPER EQUIPMENT INC.
MIDDLETOWN, DE
(302) 378-9555