

# KRAUSE IS OUTFRONT

## IN CONSERVATION TILLAGE SYSTEMS

with the




## PRIMARY COMBINATION IMPLEMENT

**Krause**  
**Conservation Tillage**  
**HEADQUARTERS**

★  
INTERCOURSE, PA


MIDDLETOWN, DE

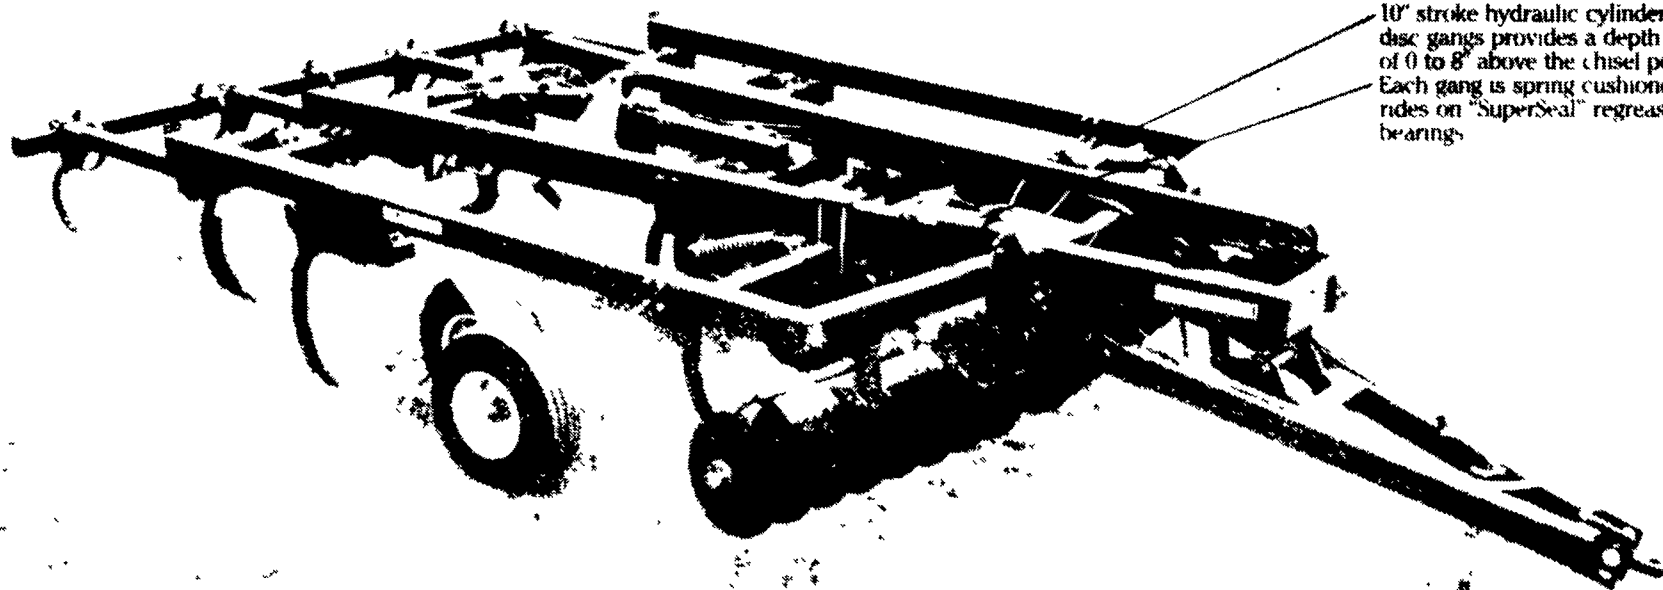


10" stroke hydraulic cylinder on disc gangs provides a depth range of 0 to 8" above the chisel points. Each gang is spring cushioned and rides on "SuperSeal" regreasable bearings.

### Heavy-Duty For Once Over Tillage To:

- .... Disc Standing Stubble
- .... Subsoil Compacted Ground
- .... Chisel And Incorporate Residue
- .... And Leave The Fields Level
- K-Tine Levelers And Harrows

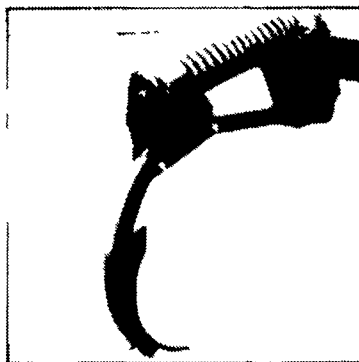

Spring Reset Chisel Shanks Are 2"x1½"x32". 14" Trip Height, A 1250 Lb. Point Load And 10" Max. Working Depth.

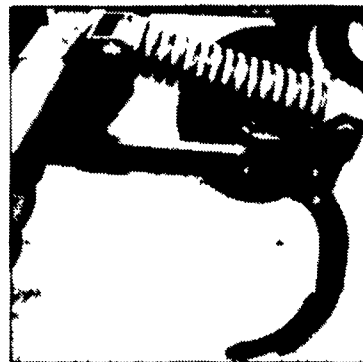

Spring Reset Subsoiler Shanks Are 3"x1½"x36". 20" Trip Height, A 1500 Lb. Point Load And 16" Max. Working Depth.

**SIZES FROM  
12 FT. - 20 FT.**

## THE KRAUSE LANDKING SAVES TIME, TRIPS AND FUEL.



Authorized  
UPS Station



C.B. HOOBER & SON INC.  
INTERCOURSE, PA

All New & Used Products Backed  
By Hooper Parts & Service

Radio Controlled Trucks For  
Better Service

(717) 768-8231

