


KRAUSE IS OUTFRONT

IN CONSERVATION TILLAGE SYSTEMS

with the



LANDKING® PRIMARY COMBINATION IMPLEMENT

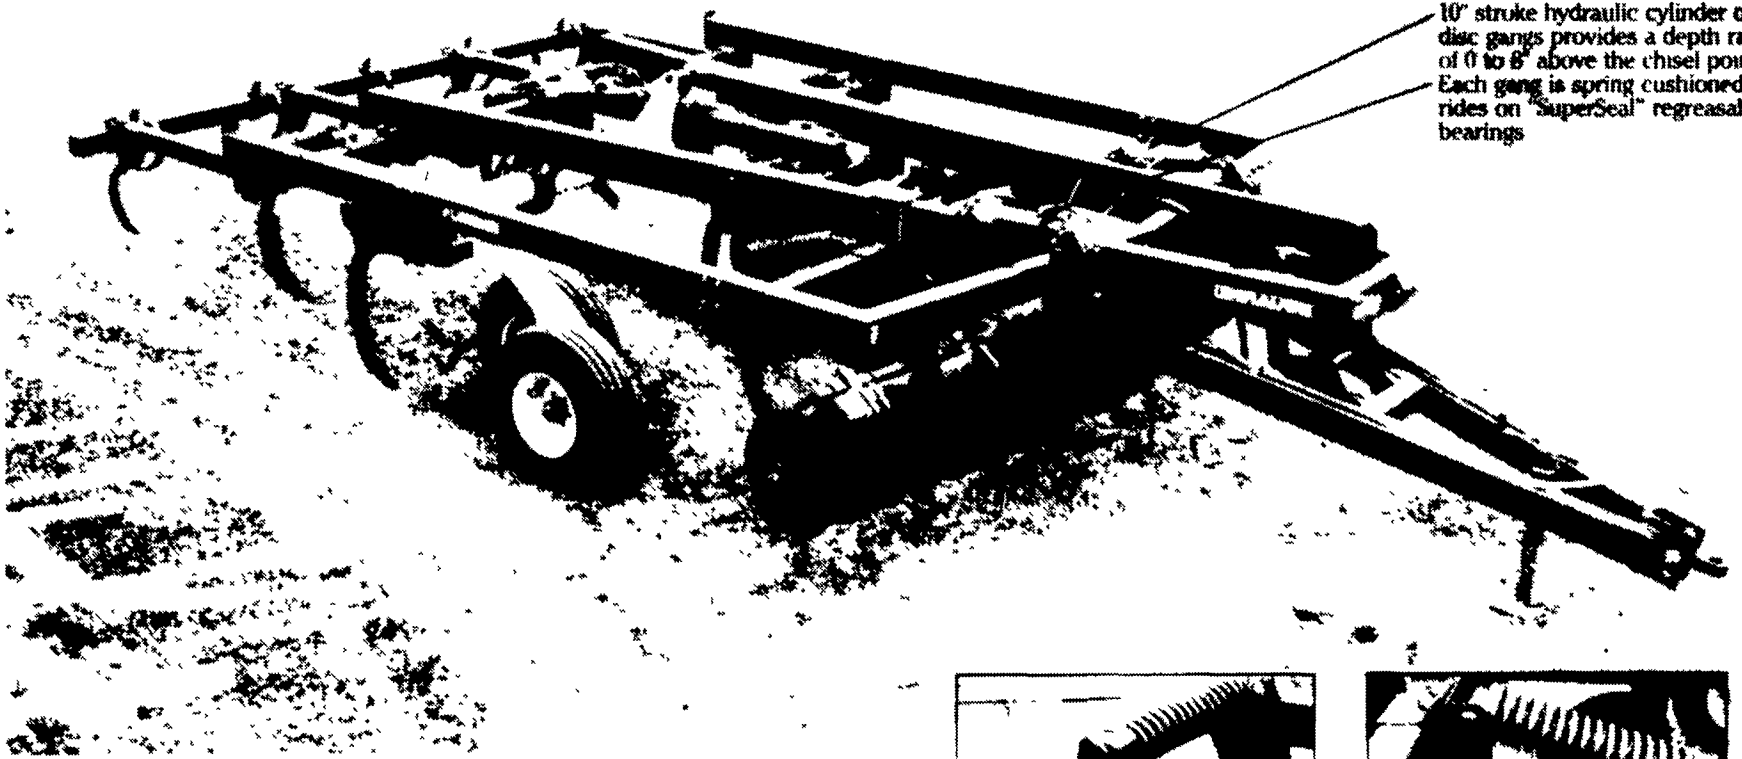

10" stroke hydraulic cylinder on disc gangs provides a depth range of 0 to 8" above the chisel points. Each gang is spring cushioned and rides on "SuperSeal" regreasable bearings

Heavy-Duty For Once Over Tillage To:


.... Disc Standing Stubble

.... Subsoil Compacted
Ground


.... Chisel And Incorporate
Residue

.... And Leave The Fields
Level

K-Tine Levelers And
Harrows

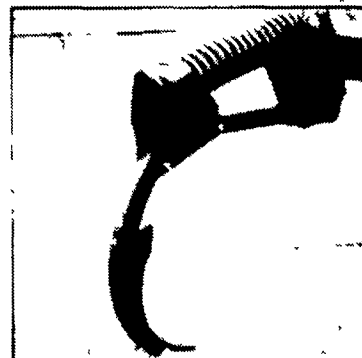

Spring Reset Chisel
Shanks Are 2"x1½"x32".
14" Trip Height, A 1250 Lb.
Point Load And 10" Max.
Working Depth.

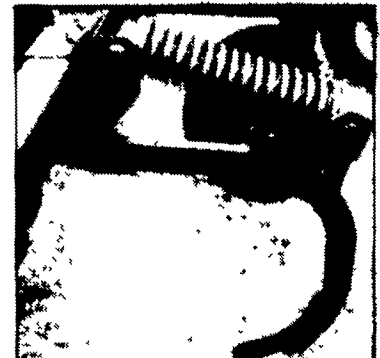

Spring Reset Subsoiler
Shanks Are 3"x1½"x36".
20" Trip Height, A 1500 Lb.
Point Load And 16" Max.
Working Depth.

**SIZES FROM
12 FT. - 20 FT.**

THE KRAUSE LANDKING SAVES TIME, TRIPS AND FUEL.



Authorized
UPS Station



C.B. HOOBER & SON INC.
INTERCOURSE, PA

All New & Used Products Backed
By Hoover Parts & Service

Radio Controlled Trucks For
Better Service

(717) 768-8231

