

Kubota's Tow Tractors Designed For Versatility

COMPTON, CA — Kubota Tractor Corporation's tow tractors, the B9200 HSD-T 4WD and the L2550 F-2T 2WD, offer a wide range of towing uses for farming, nursery and other commercial applications. In addition to the popularity these models enjoy within the airline industry, the B9200 HSD-T and the L2550 F-2T provide the lugging power and maneuverability to handle a variety of jobs.

The B9200 HSD-T 4WD and the L2550 F-2T 2WD models are powered by strong, dependable three- or four-cylinder Kubota diesel engines and run with either Number 2 diesel or Jet A fuel.

These tough Kubota engines are designed for long-running operation and minimal maintenance.

Kubota's tow tractors have been customized for towing applications, eliminating the need for both the 3-point hitch and PTO features found on conventional Kubota B9200 and L2550 tractor models. Both models have been equipped with a specially designed towing hitch.

The 22.5 HP B9200 HSD 4WD tow tractor provides a 1,570 lb. drawbar pull capacity. Standard features include a quick-heating glow plug for rapid starts in cold weather as well as a Key Stop, automotive type horn and 4WD

Warning Lamp. Optional power steering provides the operator with precise maneuvering, therefore reducing fatigue.

The larger L2550 F-2T 2WD tow tractor with 29.5 HP provides 1,700-drawbar-pull-capacity and comes equipped with partially synchronized transmission and a manual shuttle shift. The shuttle shift allows the operator to change travel direction without searching for the reverse gear, thereby improving efficiency and reducing wear on the clutch and transmission. The L2550 F-2T also features wet disc brakes and an adjustable suspension seat for comfortable, efficient operation.



The L2550 F-2T tow tractor provides the lugging power and maneuverability necessary for farming, nursery, and construction.

Accepting Nominations


The Farmers Home Administration (FmHA) is accepting nominations for County Committee elections for Adams County. This notice is issued to inform eligible voters of the right to nominate candidates by petition. Copies of the petition and instructions on its completion can be obtained from your local FmHA office.

Persons nominated should have an interest in a farm as an owner, tenant, or sharecropper within the county or area in which activities of the county or area committee are carried out. They must be citizens

of the United States or aliens lawfully admitted to the United States for permanent residence, and be well qualified for committee work. Spouses or those persons who meet the eligibility criteria are also eligible for nomination for election to the county committee. Nominations must be received in the Adams County FmHA office no later than May 19, 1988. FmHA committee elections are open to all eligible voters without regard to race, color, religion, national origin, age, political affiliation, marital status, sex, and/or handicap.

PAUL B. Zimmerman INC.

GATES and FENCING



Coated With Baked On Thermoset Epoxy Powder Coating After Fabrication


- Super tough finish
- Superior electrical insulation
- Resists acid & chemicals
- Protection from rust & corrosion
- Chip resistant
- Smoother finish, stays cleaner

Standard Heights For Gates & Fencing:
 • 38" High - 4 Bar • 48" high - 5 Bar • 54" High - 6 Bar

NOTE:
 • 13 Ga. steel 15% heavier than 14 Ga. steel
 • 13 Ga. steel 45% heavier than 16 Ga. steel
 • 13 Ga. steel 85% heavier than 18 Ga. steel

All Gates & Fencing Made Of 1.9" Outside Diameter High Yield Steel Tubing With 13 Ga. Wall

SLANT BAR FEED THRU FENCE

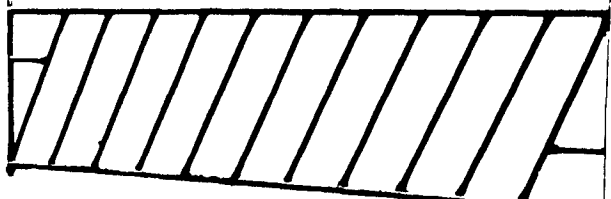

Custom Built To Any Length

BUSH HOG

FH SERIES

FLAIL MOWERS

For Close Cutting Fine Turf And Cutting Grass And Brush On Farms, Municipalities, Parks And Lawns

Rated For 40-72 HP Tractors



62, 74 and 88-Inch Cutting Widths

Specifications
 (Subject to change without notice)

- Cutting Width: 62", 74", 88"
- HP Range: 40 - 72
- Type Hitch: 3 Point Cat. 1
- Gearbox RPM: 540
- Cutting Height: 1/4" - 5"
- Cutting Capacity: 2"
- Rotor Shaft Drive: Multi Belts, B-Section
- Rotor Shaft Speed: 1877 RPM
- Rotor Rotation: Forward
- Type Blades: Reg. Cut
- Type Gauge Wheel: Full Width Roller and Optional Gauge Wheels
- Overall Length: 37"
- Overall Height: 20"
- Overall Width: 72", 84", 98"
- Offset Capabilities: 5/8", 12", 8 1/4"
- Shipping Weight: 671 lbs., 745 lbs., 778 lbs.

RUGGED, INDUSTRIAL FLAIL MOWERS THAT DELIVER ACTUAL, UNIFORM CUTTING JOB

SEE YOUR LOCAL BUSH HOG DEALER

BINKLEY & HURST BROS. INC. Lititz, PA 717-626-4705	LEHIGH AG EQUIPMENT Allentown, PA 215-398-2553	NICHOLS FARM EQUIP. Bloomsburg, PA 717-784-7731	STRALEY FARM SUPPLY INC. Dover, PA 717-292-4443
FARMERSVILLE EQUIPMENT, INC. Ephrata, PA 717-354-2150	MARSHALL MACHINERY INC. Honesdale, PA 717-729-7117	PEOPLES SALES & SERVICE Oakland Mills, PA 717-463-2735	TRACTOR PARTS CO. Bloomsburg, PA 717-784-0250
GEORGE N. GROSS, INC. Dover, PA 717-292-1673	MILLER SALES & SERVICE INC. Stewartstown, PA 717-993-2732	PETERMAN FARM EQUIPMENT, INC. Carlisle, PA 717-249-5338	UMBERGER'S OF FONTANA Lebanon, PA 717-867-5161
A.L. HERR & BROS. Quarryville, PA 717-786-3521	KELLER'S FARM MACHINERY, INC. Quakertown, PA 215-536-4046	STANLEY'S FARM SERVICE Klingerstown, PA 717-648-2088	C.J. WONSIDLER BROS. Quakertown, PA 215-536-1935
NEUHAUS'ES INC. Glen Rock, PA 717-428-1954		STOLTZFUS FARM SERVICE Cochranville, PA 215-593-2407	