



Farmer Boy Ag... Your Complete Poultry And Swine Equipment Center

QUALITY CHORE-TIME BINS

We Assemble, Deliver & Set-Up Bins On Your Farm

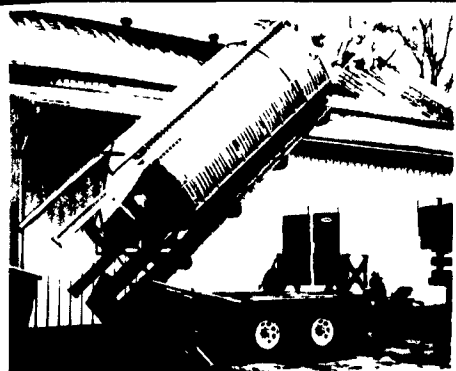

Picture Showing CHORE-TIME Bin Set-Up With Hydraulic Bin Trailer

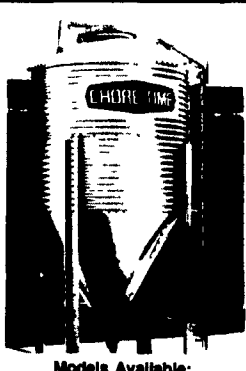

Models Available: Your Choice Of 6, 7, 9, 12 And 15 Ft. All Galvanized Hopper-Bottom Bins



genuine FLEX-AUGER

Whether you're modernizing an existing feeding set-up - or starting from scratch - Chore Time's extremely energy-efficient FLEX-AUGER® Feed Delivery System is the best way ever devised to convey free flowing feeds (including high moisture corn rations containing up to 27% moisture) up, down or around corners - economically. The simple FLEX-AUGER system has no corner cogs, gears, connections or pins to wear out. FLEX-AUGER is simple to install and maintain (specially-formulated PVC tubes slip and glue together).

RENCO CORPORATION LEAN-MEATER®



Specifications for RENCO LEAN-MEATER, TYPE LM-8
General: All solid-state, computerized circuitry. Environmentally protected circuit board. All metal case.
Operation: Measures backfat in 10 seconds or less. Signal given when measurement is complete.
Range: 5-40 mm (0.197"-1.575").
Accuracy: ± 1 digit or ± 1 mm (.039")
Display: 2-digit LED with separate "Ready" LED. Highly visible in dim surroundings.
Controls: On/Off push button. Toggle switch for selecting 2 or 3 layer measurement.
Power Supply: Internal, 5.0 volt, rechargeable Nickel-Cadmium battery pack, battery charger included.

Battery Pack Life: Approximately 2-4 years (1000 charges/discharges).
Operating Time: 6-10 hours on full charge. Recharge in 12-14 hours.
Battery Charger: 115 Volt included, 230 available.
Size: (cm) 18x7x2.5; (in) 7x2.75x1.
Weight, Lean-Meater Only: 340 gm (12 oz.).
Shipping Weight, Complete Package: 850 gm (1.87 lbs.).

SEE FARMER BOY AG FOR YOUR SWINE EQUIPMENT AND SUPPLIES


AUTHORIZED CHORE-TIME MASTER DISTRIBUTOR



Quality Stainless Steel Hog Feeders

Relative Size Illustration

Photo shows relative size of double-sided Nursery feeder (ND-5) on left, and finisher feeds (FD-5) on right



SOW FEEDER

All Stainless Steel


Vent Door available in stainless or galvanized steel. Insulated

- No adjustment rods or bolts within reach of hogs
- Special floating feed gate causes additional feed release when hog touches it.
- Feed gate easily adjusted with lockable control cranks.
- 100% highest quality stainless steel.
- All exposed metal edges are safety hemmed.
- Welded construction for maximum strength.
- Quality craftsmanship.



FARM DUTY MOTORS

Heavy duty single-phase "Hi Torque" motors designed specifically for severe farm duty applications. These capacitor start/induction run motors provide high starting torque, while requiring only normal starting current. They are ideally suited for tough applications such as pumps, conveyors, poultry equipment and other farm duty machinery.

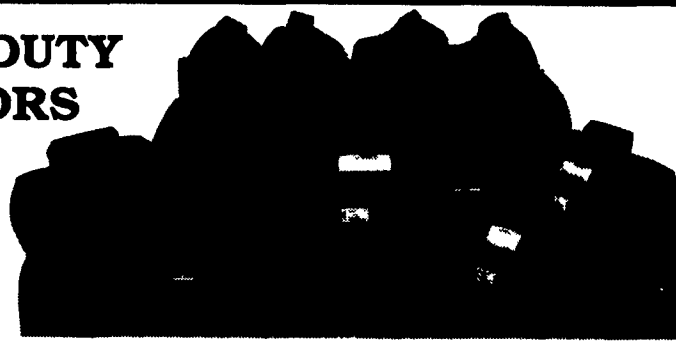


1/2	1725	D56	115/208-230	1 15	M6C17NB61	110085d
1/2	1725	C56	115/208-230	1 15	M6C17FB66	113256
1/2	1725	C56	115/208-230	1 15	M6C17FB11	110086
3/4	1725	D56	115/208-230	1 15	M6C17FB9	110087
1	1725	D56	115/208-230	1 15	M6C17FB10	110088
1 1/2	1725	H56H	115/230	1 0	P8K17FB3*	110089
2	1725	J56HZ**	230	1 0	P8K17FB4*	110090
2	1740	E182T	115/208 230	1 0	P182C17FB2*	130042
3	1740	J184T	230	1 0	P184C17FB2**	130043
5	1740	L184T	230	1 0	P184K17FB2**	130044
5	1740	H215T	230	1 0	P215K17FB3**	140203
5	1740	H215	230	1 0	P215K17FB5**	140223
7 1/2	1740	K215T	230	1 0	P215K17FB2**	140130
7 1/2	1740	K215	230	1 0	P215K17FB4**	140209
10	1740	L215T	230	1 0	P215K17FB6**	140414

* Totally Enclosed Non-Ventilated * Capacitor Start/Capacitor Run * Class F Insulation
 ** Shaft 1 1/2" x 3/8" Key 1/4" Sq x 2 3/4" Long
 *** Combination 56Hz base and shaft motor can be mounted as a NEMA 56 or 143-ST frame and has a standard NEMA 145T frame shaft of 7/8" diameter
 d To be discontinued when present stock is depleted


AQUA BLAST

PRESSURE WASHERS

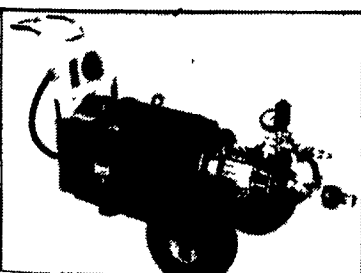

Electric Cold


STANDARD FEATURES:
 Chem. Injector: Downstream Low Pressure
 Gauge: 5000 PSI Glycerin Filled
 Gun: Trigger Shut Off With Cool Grip
 Wand: Dual Wand With Variable Pressure Control Insulated Grip
 Pop-Off: Safety Relief Valve
 Heat Protection: 145° Heat Sensor In Bypass For Pump Protection
 Filter: In Line Water Filter
 Fittings: Steel Minimum Burst, 15000 PSI
 Frame: Heavy Duty Steel
 Wheels: Heavy Duty Semipneumatic
 Variable Degree Nozzle 0° to 60°



Electric Hot

STANDARD FEATURES:
 Chem Injector: Downstream Low Pressure
 Gauge: 5000 PSI Glycerin Filled
 Gun: Trigger Shut Off With Cool Grip
 Wand: Dual Wand with Variable Pressure Control Insulated Grip
 Pop-Off: Safety Relief Valve
 Heat Protection: 145° Heat Sensor In Bypass For Pump Protection
 Filter: In Line Water Filter
 Fittings: Steel Minimum Burst, 15000 PSI
 Frame: Heavy Duty Steel
 Wheels: Heavy Duty Semipneumatic
 Tank & Coil: Insulated Stainless Steel Tank With Steel Coil
 Fuel Tank: Removable 5 Gal.
 Nozzle: Variable Degree 0° to 60°

WALL HOUSING FAN



- 48 Inch
- High Airflow Capacity

ALUMINUM SHUTTERS

- All Aluminum Construction
- Counter Balanced Blades
- Nylon Bearing
- Stainless Steel Hinge Pins
- Low Air Resistance
- Reduces Sticking in Dusty and Moist Conditions




FAN SIZE	SHUTTER MODEL
36"	WA3939
48"	WA5454

Master-Ex.

RUGGED PLASTIC DIRECT DRIVE FANS

The Master-Ex DDP fans have been engineered and designed to withstand the corrosion associated with agricultural environments. They provide the user the ultimate in efficiency and economy.

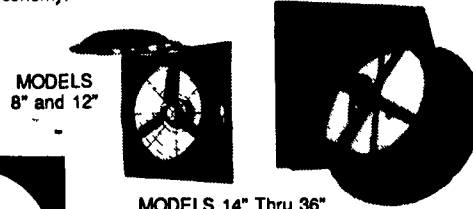

MODELS 8" and 12"

MODELS 14" Thru 36"

BELT TIGHTENERS

Fan belts will stretch with operation over time. Although most of this stretch occurs in the first month of operation, stretching will continue, reducing performance. The belt tightener will maintain constant tension keeping RPM at the designed level for efficient operation. The galvanized components resist corrosion and incorporate a compression spring to prevent the belt from jumping off the pulley at start up.



24 Hour Service

Check Our Warehouse Prices

WE SHIP UPS

FARMER BOY AG. INC.

410 E LINCOLN AVE

MYERSTOWN, PA 17067

PH. 717-866-7565

Hours:
 M-F 7:00-5:00;
 Sat. 7:30-11:30

Full Line Of Parts In Stock For Your Poultry And Hog Needs