


# Goossen

INDUSTRIES

## Vac 'n'Load

The Perfect Match for Your Mower

- One-pass clean-up behind virtually any front-mount mower
- Picks up leaves for fast fall clean-up

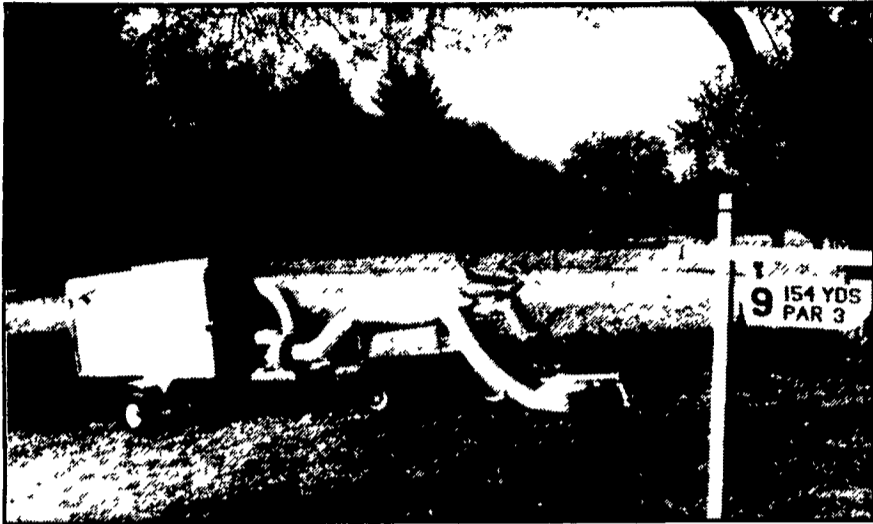


## THE MULCHING SOLUTION

### FEATURES:

- 11 H P Honda OHV engine, with electronic ignition and oil alert
- Automatic endgate
- Adjustable, sealed connection between vacuum chute and enclosed trailer

### SPECIFICATIONS:


- **Vac**  
POWERED BY 11 H P 4-cycle Honda OHV Gasoline Engine with electronic ignition and oil alert
- **Trailer**  
WIDTH (to outside of tires) 68"  
HEIGHT (overall) 81"  
LENGTH (overall, including tongue) 172"  
TRAILER BOX DIMENSIONS 4' x 4' x 8"  
CAPACITY 4.74 cu yds  
AXLE 2000 lbs capacity, TORAFLEX™ suspension  
WHEELS 20.5 x 10"

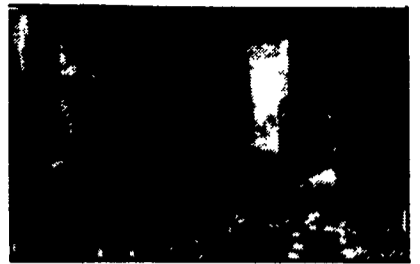

The accessory **Hand-held Hose Adapter** protects the hose, maintains an air-flow gap between the hose and the ground, and provides a convenient hand hold when the unit is being used as a power vac



With the accessory 6" **Applicator Hose w/Adapter** you can dispense material drawn from the trailer or other container with the standard 8" hose. Ideal for mulching or transferring material

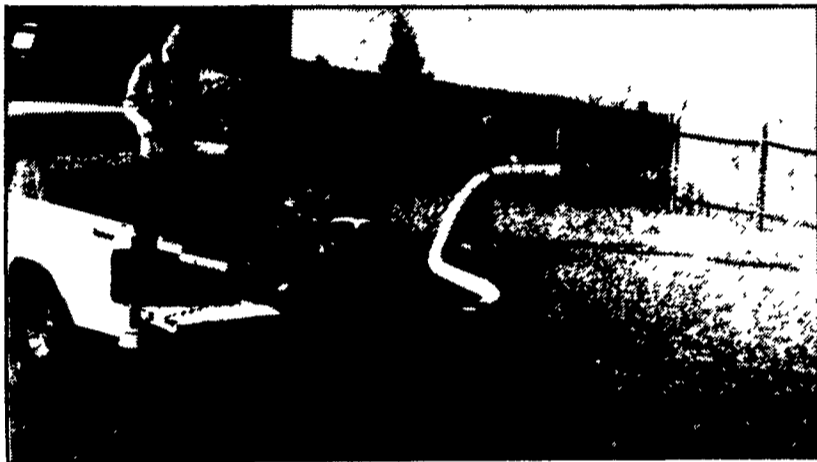

## The Goossen Bale Chopper

### Features:

- 11-HP Honda Engine with electronic ignition, oil alert, electric start
- Optional Electric Clutch
- Safety Lid
- Adjustable Grate
- Flexible 30' Placement Hose
- Bale Carrier (PTO model only)
- Lift Handles (Self-powered models)

Every Goossen Bale Chopper has a durable polyester Powder Paint Finish, electrostatically applied to cover completely and keep moisture out. This finish is extremely strong, and resists chipping and cracking.

Many accessories expand the versatility of your Bale Chopper:

- Riser, with 180-degree Directional spout
- Wheel Kit Attachment
- PTO Trailer
- 5/8" Leg Extensions

## Tie Barn/Free Stall Bedding - Straw & Paper Chopper



### FEATURES:

- 8 H.P. or 11 H.P. Honda Engine with electronic ignition, oil alert
- Safety Lid
- Adjustable Grate
- Lift Handles
- Banded 3-belt Drive

### SPECIFICATIONS

- **Gasoline Model NA2500BDGP (8 H.P.), Model NA2500BD11 (11 H.P.)**  
POWERED BY: 8 H.P. or 11 H.P. 4-cycle Honda Gasoline Engine  
WIDTH: 33" HEIGHT: 59" LENGTH: 53"  
WEIGHT: 300 lbs.
- **Electric Model NA2500 ELEC**  
POWERED BY: 5 H.P. Single-phase Electric Motor  
WIDTH: 33" HEIGHT: 59"  
LENGTH: 53" WEIGHT: 325 lbs.

Every Goossen Bale Chopper has a durable polyester Powder Paint Finish, electrostatically applied to cover completely and keep moisture out. This finish is extremely strong, and resists chipping and cracking.

### SPECIFICATIONS:

- **Self-Powered Model BCG-2**  
POWERED BY: 11 H.P. 4-cycle Honda Gasoline Engine  
WIDTH: 31" HEIGHT: 51"  
LENGTH: 55" WEIGHT: 460 lbs.
- **PTO Model BC-3**  
POWERED BY: 540 PTO  
WIDTH: 31" HEIGHT: 55" LENGTH: 60"  
WEIGHT: 525 lbs.
- **Electric Model BC-EL**  
POWERED BY: 5 H.P. Single-Phase Electric Motor  
WIDTH: 31" HEIGHT: 55"  
LENGTH: 60" WEIGHT: 525 lbs.

## NO MORE PAINTING!



Kemlite's GLASBORD® frp wall panel cleans up easy!

# GLASBORD®

## - GRADE B -

- Moistureproof ■ Shatterproof ■ Will not rot or mildew
- Rustproof ■ Stain resistant ■ Cleans simply/quickly
- Dentproof ■ Odorfree ■ U.S.D.A. accepted

Glasbord panel is a tough, semi-rigid wall lining material of fiberglass reinforced plastic — superior to metal and painted finishes. It installs easily in any type construction and is suitable for building new or refurbishing. Available in a variety of sizes, complete with all accessories. Also available with low smoke development, fire retardant properties. Ask about low smoke Fire-X Glasbord paneling.

ACCESSORIES: Vinyl moldings are available. They add to the finished appearance and aid in making a watertight installation.



### DRIVE RIVET

You can expand them into solid furring strips, masonry walls or any other rigid backing.

See Us At  
PA FARM SHOW  
Jan. 9-14  
State College, PA  
508-859-1111

# RYDER SUPPLY CO.

539 Falling Spring Road  
P.O. Box 219  
Chambersburg, PA 17201-0219  
Phone 717-263-9111