


# FARMER BOY AG INC.

Your Complete Poultry & Swine Building & Equipment Center

## OUR OWN HOG CONFINEMENT EQUIPMENT AT DISCOUNTED FACTORY DIRECT PRICES

### FENCING Vertical



All Farmer Boy fencing is available in black iron, hot-dipped galvanized or painted. Fasteners available from Farmer Boy: thunderstuds, T-bolts, etc.

#### SPECIFICATIONS


\*Solid rod or Schedule 40 pipe

Nursery	3/8" rods 2 1/2" on center	26" high
Grower	1/2" rods 3 1/2" on center	30" high
Finisher	1/2" rods 4 1/2" on center	32" high
Breeding	1/2" rods 4 1/2" or 6" on center	40" high

Height is measured installed from floor to top of fencing.

Posts Available: 1-way, 2-way, 3-way, or 4-way 1" Solid or 1" Schedule 40 pipe. Available with step for operator convenience

### HORIZONTAL



#### OPTIONS:

##### Pin Styles

For the gate to open, this style pin needs to be lifted ONLY one-third of the distance resulting in convenience for the operator and a decrease in the amount of pins lost!

##### Leg Styles


Standard: stainless steel welded on Bolt-on: This leg adds stability and is easily fastened to floor. Can be sold separately for easy replacement. 1/4" or 3/8"

#### SPECIFICATIONS

Nursery	3/8" rods in center	1/2" rods on bottom	28" high
	Angle 1 1/8" x 1 1/8"		
	3/16" Vertical Rails		
Grower	1/2" rods in center	3/4" rods on bottom	32" high
Finisher	1/2" rods in center	3/4" rods on bottom	32" high
Breeding	1/2" rods in center	3/4" rods on bottom	44" high

Angle 3/16" x 1 1/2" x 1 1/2"  
1/4" Vertical Rails  
Height is measured installed from floor to top of fencing

### GESTATIONAL STALLS VERTICAL



#### Features


**Drop-Back-** designed for easy operator access for pregnancy testing and administering medications - through rear horizontal bars.

**Slope-Front-** allows for easier movement by increasing aisle space available for operator.

#### SPECIFICATIONS

Frame Construction: 7/8" steel rod  
Feed Tube: 2" schedule 40 pipe  
Vertical Rods: 1/2"  
Standard Legs: 7/8" round x 1/4" flat OR 1" round x 3/8" flat OR stainless steel

### HORIZONTAL



#### FEATURES:

**Drop-Back-** allows for easier movement by increasing space available for operator to perform pregnancy tests and medication administrations.


**Straight-Front-** allows more room for sow mobility  
\*Also available in slope-front

#### SPECIFICATIONS

Frame Construction: 3/16" or 1 1/2" angle on bottom 1/8" x 1 1/2" angle on top  
Feed Tube: 2" schedule 40 pipe  
Horizontal Rods: 1/2"  
Vertical Flats: 1/4"  
\*Available Legs: 1/4", 3/8", or 1/4" stainless steel  
\*This design allows for easy fastening to concrete slabs (see picture).

### FARROWING CRATES

#### MODEL 60




**FEATURES:** European style; Bowed bar adjustable side rails; Anti-crush rump guard on rear door; Large, efficient, stainless steel feeder has no sharp edges.

**SPECIFICATIONS:** 7/8" solid steel construction.

#### OPTIONS:

- Available with finger bars
- Black iron, hot-dipped galvanized, or painted
- Water set-ups: stainless steel or hot-dipped galvanized pipe
- Creep Sets: stainless, hot-dipped galvanized, or PVC
- Crate stands: hot-dipped galvanized, painted, or black iron

#### MODEL 70 SWING-SIDE



#### FEATURES:

Standard- 3 position adjustment for sow comfort; Swing-side easily adjusts to size of sow; Standard - bowed-bar sides; No cylinders!; No sharp edges!; Front & Rear Gates swing both right and left!; Large, efficient stainless steel feeder has no sharp edges!; Pig-saver bar decreases death rate of piglets; Rubber bumper guards reduce noise and injury!; Feeder raised off of floor to increase ventilation for sow comfort.

**SPECIFICATIONS:** 1" schedule 40 pipe construction, Bottom 6" on legs are 1" solid rod.

#### OPTIONS:

- Pig-saver bar OR finger bars
- Black iron, hot-dipped galvanized, or painted
- Rump guard on rear door
- Creep sets: stainless steel, hot-dipped galvanized or PVC
- Crate stands: hot-dipped galvanized, painted, or black iron
- Water set-ups: stainless steel or hot-dipped galvanized pipe

## WELDED FINISHING FEEDER



4-Hole Double-Sided Finishing Feeder

### Single or Double Sided

A-P offers a quality line of economically priced, all welded, stainless steel hog feeders which are available in single-sided and double-sided (pictured above) styles. With feeding capabilities ranging from 4 holes up to 14 holes, you'll be sure to find a feeder just right for your installation.

#### SPECIFICATIONS:

Model Number	Number of Holes	Width	Height	Length	Maximum Capacity
<b>SINGLE SIDED FEEDERS</b>					
AP-4SWF	4	14 1/4"	31 1/4"	40 1/4"	261 lbs
AP-5SWF	5	14 1/4"	31 1/4"	50 1/4"	313 lbs
AP-6SWF	6	14 1/4"	31 1/4"	60 1/4"	365 lbs
AP-7SWF	7	14 1/4"	31 1/4"	70 1/4"	417 lbs
<b>DOUBLE SIDED FEEDERS</b>					
AP-4DW	8	25 1/4"	31 1/4"	40 1/4"	338 lbs
AP-5DW	10	25 1/4"	31 1/4"	50 1/4"	405 lbs
AP-6DW	12	25 1/4"	31 1/4"	60 1/4"	472 lbs
AP-7DW	14	25 1/4"	31 1/4"	70 1/4"	539 lbs

All models come fully assembled

- Features:**
- 304 Stainless Steel construction.
  - All welded construction.
  - Easily adjustable and multi-movement agitator gate.
  - All exposed edges are hemmed for safety.
  - Standard Single-Sided models available with 4, 5 and 6 holes; Standard Double-Sided models available with 8, 10 and 12 feed holes. 7 hole and 14 hole sizes available (special order only).

## FEED BINS (GSI)

We assemble, deliver & set-up bins on your farm.



Models Available:  
Your Choice Of 6, 7, 9, 12 and 15 Ft. All Galvanized Hopper-Bottom Bins

### Ground controlled fill caps

Opening and closing of the fill cap is made easy by our spring loaded, Auto-Lok ground control. Offered as a standard tank feature, this factory assembled control has a single chain to operate the entire opening, closing, and latching process. In the open position, the lid lays parallel to the ground to insure ease of filling the tank, along with eliminating the possibility of damage from the fill auger. In the closed position, the lid is automatically and securely locked down by the gravity assisted, positive latching mechanism. An alternative to this package includes a manual hold-down latch and a sealing gasket for use with a pneumatic fill system.

## BIG HUSKY


### POLY WATERER



- Improved UV stability over competition
- Our dependable Drain valve and float
- TWO YEAR GUARANTEE
- STAINLESS STEEL CHEW GUARDS
- Optional holdown brackets
- Optional heat for winter
- Large snap down 12" Cover
- Special grooved side for heater cord protection
- Gallon calibration molded into sidewall

STOCK NUMBER	CAPACITY	DRINKER DIMENSION	GROUND HEIGHT TO DRINKER		SHIP WEIGHT
			7 1/2"	3"	
WP-50	50 gal	18"x20"	2	60" OVER 40" LB	34

- Two large 18 x 20 recessed drinkers
- Easy clean out with recessed drain plug
- Waterer is lightweight but 15% thicker and 20% heavier than competitors



### BIG HUSKY SUMMER FOUNTAIN

- Dependable float valve.
- 8" top fill hole.
- Heavy 11 gauge and pull.
- Oak skids.

Number	Height	Width	Length	Ship Wgt
1490	33 1/2"	36"	45"	105 lbs

## Beat The Heat!

### 3 COOLING SYSTEMS UNIVERSAL COOLING SYSTEM


- Droplet
- Mist
- Sprinkle



Write or Call For FREE Catalog!

### Schaefer Barn Kooler®

The Barn Kooler® System incorporates a series of fans and controls into an integrated system that is used for both high velocity air circulation for cooling during the Summer and gentle, draft-free air movement during the Winter months. By utilizing thermostically controlled speed modulators, the speed of the circulating air is constantly adjusted to the temperature. As the temperatures in the building rise and fall, so does the volume of air being circulated.

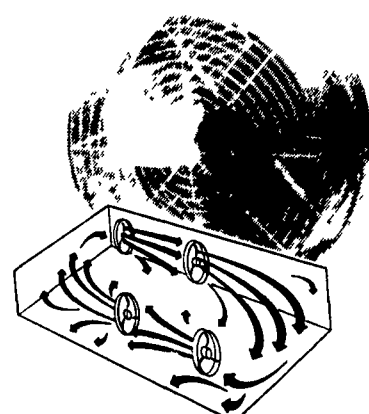

Full Line Of Parts In Stock For Your Poultry And Hog Needs

Hours: M-F 7:00-5:00; Sat. 7:30-11:30



24 Hour Service

# FARMER BOY AG INC.

410 E LINCOLN AVE (RT 422)

MYERSTOWN, PA 17067

PH. 717-866-7565

8/6

Check Our Warehouse Prices



WE SHIP UPS



SEE PAUL, JAY, OR STEVE FOR YOUR PARTS AND EQUIPMENT NEEDS