

FARMER BOY AG INC.

Your Complete Poultry & Swine Building & Equipment Center

FANS FANS FANS 36" to 48" Ventilate

With




BELT DRIVE OR DIRECT DRIVE PANEL FANS FOR AGRICULTURE
Guaranteed Lowest Price

PROPELLER
All galvanized blades riveted to matching heavy gauge galvanized spider. High performance camber twist propeller, stabilizes air flow through lower speeds.

All wall housings are manufactured out of "Prime" G90 series galvanized steel for a long life and sturdy construction. All fans are equipped with a 10' cord. Guards are pre-cut and galvanized.

FAN STRUCTURE

- All galvanized frame and orifice - corrosion resistant, long lasting
- High Efficiency "PBC" motor.
- Upright motor mounts for unrestricted airflow.
- Full variable speed capabilities on Direct Drive.

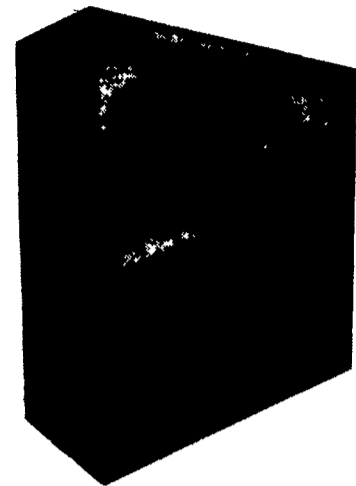

- Stamped blades for consistent performance fan after fan.
- Twist link belt on belt drive for ease of adjustment to keep at top performance.



BIG HUSKY

When it says BIG HUSKY its gotta mean quality

POLY WATERER



- Improved UV stability over competition
- Our dependable Dairin valve and float
- TWO YEAR GUARANTEE
- STAINLESS STEEL CHEW GUARDS
- Optional holdown brackets
- Optional heat for winter
- Large snap down 12" Cover
- Special grooved side for heater cord protection
- Gallon calibration molded into sidewall

- Two large 18 x 20 recessed drinkers
- Easy clean out with recessed drain plug
- Waterer is lightweight but 15% thicker and 20% heavier than competitors

AH-493
1000 watt heater for reservoir

AH-49
250 watt heater for trough



SPECIFICATIONS		RESERVOIR WEIGHT TO DISPENSE		HEATER WEIGHT	
TYPE	CAPACITY	7W"	3P"	3P"	6P"
WP-60	60 gal.	18" x 24"	2	60-6000	30"

HOG WATERER

- Built strong and rugged like our name.
- 100 gallon capacity.
- Five drinking spaces on each side.
- Drinking trough 3 1/4" deep, 8" wide.
- Trough made from heavy 16 gauge steel.
- Heavy galvanized steel body, lock seamed with heavy swedging.
- Drain plug on end for easy draining.
- Side straps made from stainless steel.

BIG HUSKY SUMMER FOUNTAIN

- Dependable float valve.
- 6" top fill hole.
- Heavy 11 gauge and pull.
- Oak skids.




SPECIFICATIONS				
Number	Height	Width	Length	Ship. Wgt.
1480	33 1/2"	36"	48"	105 lbs.




A Division of GSI

CEILING INLETS

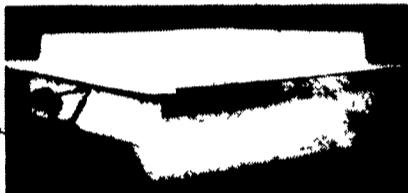

Opening and closing of the lid is made easy by our spring loaded, Auto-Lock ground control. Offered as a standard tank feature, this factory assembled control has a single chain to operate the entire opening, closing, and latching process. In the open position, the lid lays parallel to the ground to insure ease of lifting the tank, along with eliminating the possibility of damage from the lid super. In the closed position, the lid is automatically and securely locked down by the gravity assisted, positive latching mechanism. An alternative to this package includes a manual hold-down latch and a ceiling gasket for use with pneumatic lid system.




POLYFENCE - LINE FEED BUNKS

EASY INSTALLATION!

5 YEAR WARRANTY

- Each bunk with 2 corners with angles for cables and end caps.
- Each bunk with a smooth bottom tank.
- No back breaking work here.
- You'll like the way clean out all year long.

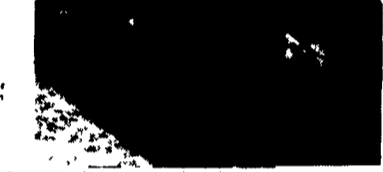

Material - polyethylene (Recycle) Size - 8 long 34" wide at the top 30" wide at the bottom 20" high on the high side (Speaker wagon side) 22" high on the short side (feeding side)



Galvanized Hog, Cattle & Horse Panels




VERTICAL VENTURI GAS BROODERS

The experience, precision and efficiency of a vertical venturi gas burner provides the outstanding flame quality needed to provide up to a 1250 cubic foot brooding area. The vertical venturi provides the air and gas for efficient burning and delivers the rated BTU output unobstructed. It is designed for labor saving maintenance procedure and trouble free operation. By adjusting the BTU output desired various options are available to the grower all at the same price. It is easy to modify in the field by changing the main burner orifices. The right sized burner is made of 34 ga. galvanized steel and is 45% lighter in diameter. It is stamped and beaded for strength and assured long life. It comes complete with leveling chains and hoses. The ceramic is made of high grade heat resistant material.

BTU Output	LP @ 11" WC	LP @ 7" WC
1250	10	10
1500	12	12
1750	14	14
2000	16	16
2250	18	18
2500	20	20
2750	22	22
3000	24	24

ORDER SPECIFICATIONS
1250 BTU LP Gas Brooder complete with 110-B Control \$ 8 per unit 1250 lb.
2500 BTU LP Gas Brooder complete with 110-B Control \$ 8 per unit 1250 lb.
3000 BTU LP Gas Brooder complete with 110-B Control \$ 8 per unit 1250 lb.
Specialty BTU output desired. 30 000 is standard and will be furnished if BTU's not specified.

Outdoor/Indoor Variable Btuh Agricultural Heaters (45,000-75,000 Btuh) With Hot Surface

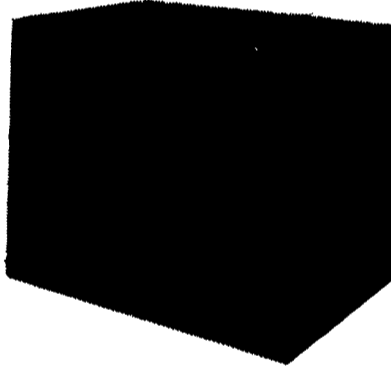

WELDED FINISHING FEEDER

Single or Double Sided

A-P offers a quality line of economically priced, all welded, stainless steel hog feeders which are available in single-sided and double-sided (pictured above) styles. With feeding capabilities ranging from 4 holes up to 14 holes, you'll be sure to find a feeder just right for your installation.

SPECIFICATIONS:

Model Number	Number of Holes	Width	Height	Length	Maximum Capacity
SINGLE SIDED FEEDERS					
AP-4SWF	4	14 1/4"	31 1/4"	40 1/4"	261 lbs
AP-5SWF	5	14 1/4"	31 1/4"	50 1/4"	313 lbs
AP-6SWF	6	14 1/4"	31 1/4"	60 1/4"	391 lbs
AP-7SWF	7	14 1/4"	31 1/4"	70 1/4"	455 lbs
DOUBLE SIDED FEEDERS					
AP-4DFW	8	25 1/4"	31 1/4"	40 1/4"	328 lbs
AP-5DFW	10	25 1/4"	31 1/4"	50 1/4"	405 lbs
AP-6DFW	12	25 1/4"	31 1/4"	60 1/4"	508 lbs
AP-7DFW	14	25 1/4"	31 1/4"	70 1/4"	589 lbs

All models come fully-assembled


FEED BINS



We assemble, deliver & set-up bins on your farm.

Ground controlled fill caps

Each unit provides 1.2 square feet of intake area and is designed to operate under negative pressure. Inlets are constructed of fiberglass composite and Styrofoam. Units measure 16.5" square and mount directly into the ceiling and project into the attic. An insulation-stop is provided. Stainless steel counter weights and a manual lock adjustment make it unsurpassed in performance.

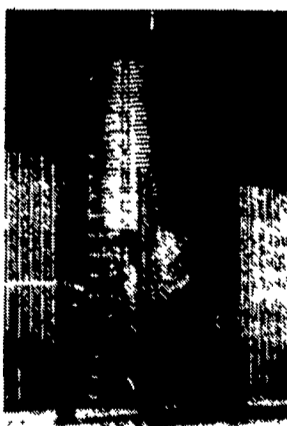

Models Available:
Your Choice Of 6, 7, 9, 12 and 15 Ft. All Galvanized Hopper-Bottom Bins

DOSATRON LIQUID DISPENSER

Accurately Meter... Antibiotics • Coccidiostats • Drugs

- Disinfectants • Sulfas • Vaccines • Wormers
- Vitamins • Fertilizers • Chemical Additives... Into Livestock and poultry drinking water or into irrigating systems.



Adjustable ratios: 1:100, 1:120, 1:200
Dosatron 7 GPM Technical Specifications:
Adjustable Ratios: 1:100, 1:120, 1:200
Minimum Flow: 13 GPH
Maximum Flow: 400 GPH
Min. Oper. Pressure: 7 PSI
Max. Oper. Pressure: 72 PSI
Connections: 1/2" NPT
Dimensions: Height 11" Width 8"
Weight: 3.5 lbs.

NORTHEAST POULTRY SHOW

Wednesday, September 21, 1994
Thursday, September 22, 1994
Lancaster Meet Resort

Full Line Of Parts In Stock For Your Poultry And Hog Needs

Hours: M-F 7:00-5:00; Sat. 7:30-11:30

Swine & Poultry Systems Specialists

FARMER BOY AG.

410 E. LINCOLN AVE. (RT 422)

MYERSTOWN, PA 17067

PH. 717-866-7565

93

Check Our Warehouse Prices



WE SHIP UPS



SEE PAUL, JAY OR STEVE FOR YOUR PARTS AND EQUIPMENT NEEDS