


FARMER BOY AG INC.

Your Complete Poultry & Swine Building & Equipment Center

Schaefer Barn Kooler®


The Barn Kooler® System incorporates a series of fans and controls into an integrated system that is used for both high velocity air circulation for cooling during the Summer and gentle, draft-free air movement during the Winter months. By utilizing thermostically controlled speed modulators, the speed of the circulating air is constantly adjusted to the temperature. As the temperatures in the building rise and fall, so does the volume of air being circulated.

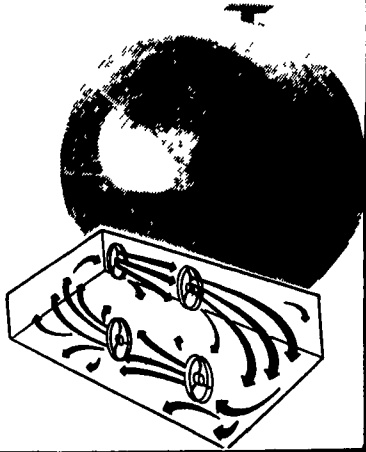

AIRSTREAMER VENTILATION CONTROLS

operates curtains on cable system by winching cable around a grooved drum controlled by a thermostat and time clock.

The model AC506S version uses a sprocket and chain drive (instead of drum) that turns a pipe running the length of the building to pull the curtain or door drop cords directly around the pipe eliminating need for cable (operates same as AC506).

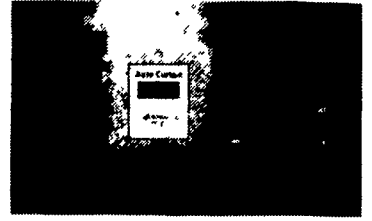

AIRSTREAMER A Division of GSI

CEILING INLETS



Each unit provides 1.2 square feet of intake area and is designed to operate under negative pressure. Inlets are constructed of fiberglass composite and Styrofoam. Units measure 16.5" square and mount directly into the ceiling and project into the attic. An insulation-stop is provided. Stainless steel counter weights and a manual lock adjustment make it unsurpassed in performance.



PLUMBING SUPPLIES

Galvanized & PVC



PVC Ball Valve

WATER FILTER CARTRIDGES



CREEP PAD

WE MAKE YOUR WORK CLEANER, FASTER,

AND HEALTHIER



AIRSTREAMER ventilation systems



LIFETIME GUARANTEED FIBERGLASS COMPOSITE HOUSINGS!

AAA MAXI-BRUTE™ SLANT-WALL BELT DRIVE FANS

• Never rust • Never need painting • Lifetime-guaranteed fiberglass composite props • Airfoil shape • Perfect balance, never rust or corrode • Choose 36", 42" or 48" size • Streamlined aluminum motor mounts • Strong, rust-proof • Optional Discharge Cone of Lifetime-Guaranteed Fiberglass Composite • The right design to boost fan performance 10-15% and the right material to last without maintenance • Energy-efficient motors • Save operating costs year after year. Slant-Wall Housing of Lifetime-Guaranteed Fiberglass Composite. The right design for wind and weather and the right material for long life.

THE LAST FAN YOU EVER NEED TO BUY

Unique construction, more features than any, better than steel yet costs no more. • Lifetime-Guaranteed Discharge Cones (optional) • Aluminum Motor Mounts • Automatic Belt Tightener • Cast Solid Belt Pulleys • Larger, Stronger 1" Drive Shafts • Stronger Cast Iron Pillow Blocks for Proper Shaft Alignment • Longer Lasting One-inch Quality Bearings • Vinyl Clad Metal Guards.

FULL COMPLEMENT OF OPTIONAL ACCESSORIES

• Motor-Driven or Back Draft Shutters with Quick Release Mounts • Motor Control • Computers For Automatic Operation. Avail. in 36" & 48"



CANARM CEILING FANS

56" Metal Blades

Excellent for Winter Time Ventilation

DOSATRON LIQUID DISPENSER

Accurately Meter... Antibiotics • Coccidiostats • Drugs • Disinfectants • Sulfa • Vaccines • Wormers • Vitamins • Fertilizers • Chemical Additives... Into Livestock and poultry drinking water or into irrigating systems.



Adjustable ratios: 1:100, 1:125, 1:200
Dose: 7 GPM Technical
Specifications:
Adjustable Ratios: 1:100, 1:125, 1:200
Minimum Flow: 13 GPH
Maximum Flow: 400 GPH
Min. Oper. Pressure: 7 PSI
Max. Oper. Pressure: 72 PSI
Connections: 1/2" NPT
Dimensions: Height 11", Width 8", 3.5 lbs.

AIRSTREAMER A Division of GSI

Direct Drive Fans AAA GLASS-PAC FIBERGLASS VENTILATION FANS

Streamlined Fiberglass Fan Housing



• Solid One-Piece Fiberglass Propellers • Heavy Duty Motors • All Aluminum Motor Unit • Stainless Steel Hardware • Vinyl-Coated Steel Front Guard • Plastic Shutter

AAA NEVER RUST AIR FOIL SHUTTERS
NO RUST, NO CORROSION
AVAILABLE IN BACK-DRAFT MODEL




It's Time To Change Your Bulb® PAR HEAT LAMP

Features/Benefits

- 175 W
- 30% Wattage Reduction. Savings Of Over \$37 Per Lamp Over The Life Of The Lamp = Energy Saving
- Long Life



SUNNE THERMOSTAT




Thermostat Has A Sealed Molded Plastic Case With All Exposed Metal Parts Of Stainless Steel, Intended For Applications That Need A Rugged Weatherproof Type Control Suitable For Either Heating Control Or Cooling Control.

PowerTwist V-BELT

Unique Twistlock Design

Reduce Downtime

With Power Twist, you will always have the right V-belt available. Just determine the length you need, then twist and interlock the end links by hand. No tools needed!

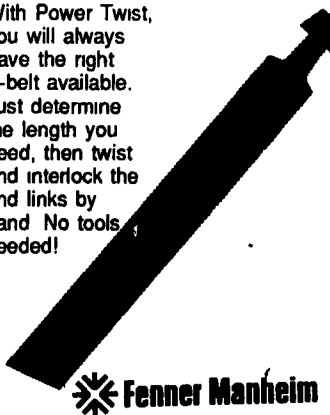

Fenner Manheim

MODEL 70 SWING-SIDE

FEATURES:

Standard - 3 position adjustment for sow comfort; Swing-side easily adjusts to size of sow; Standard - bowed-bar sides; No cylinders; No sharp edges; Front & Rear Gates swing both right and left; Large, efficient stainless steel feeder has no sharp edges; Pig-saver bar decreases death rate of piglets; Rubber bumper guards reduce noise and injury; Feeder raised off of floor to increase ventilation for sow comfort.

SPECIFICATIONS: 1" schedule 40 pipe construction, Bottom 6" on legs are 1" solid rod.

- OPTIONS:
- Pig-saver bar OR finger bars
 - Black iron, hot-dipped galvanized, or painted
 - Rump guard on rear door
 - Creep sets: stainless steel, hot-dipped galvanized or PVC
 - Crate stands: hot-dipped galvanized, painted, or black iron
 - Water set-ups: stainless steel or hot-dipped galvanized pipe

HORIZONTAL

OPTIONS: Pin Styles

For the gate to open, this style pin needs to be lifted ONLY one-third of the distance resulting in convenience for the operator and a decrease in the amount of pins lost!

Leg Styles

Standard: stainless steel welded on Bolt-on. This leg adds stability and is easily fastened to floor. Can be sold separately for easy replacement. 1/4" or 3/8"

SPECIFICATIONS

Nursery	3/8" rods in center Angle 1/8" x 1/2" 3/16" Vertical Rate	1/2" rods on bottom	28" High
Grower	1/2" rods in center	3/4" rods on bottom	32" High
Finisher	1/2" rods in center	3/4" rods on bottom	32" High
Breeding	1/2" rods in center Angle 3/16" x 1/2" x 1/2" 1/4" Vertical Rate	3/4" rods on bottom	44" High

Height is measured installed from floor to top of fencing

BEEF/DAIRY

CAPACITY	
GALLONS	
SPECIFIC	
DIMENSIONS	
WEIGHT	

MODEL #3410

CAPACITY	
GALLONS	
SPECIFIC	
DIMENSIONS	
WEIGHT	

BEEF/DAIRY


CAPACITY	
GALLONS	
SPECIFIC	
DIMENSIONS	
WEIGHT	

MODEL #3310-S Hogs

CAPACITY	
GALLONS	
SPECIFIC	
DIMENSIONS	
WEIGHT	

BOSS HOG FLOORING FOR ALL CONFINEMENT NEEDS

"New" Size 3/8"x3" - 5/16" Wire In Stock
3/8"x2 - 5/16" Wire
3/8"x1 1/2" - 243" Wire

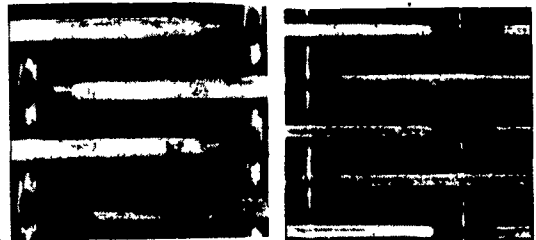

Full Line Of Parts In Stock For Your Poultry And Hog Needs

Hours: M-F 7:00-5:00; Sat. 7:30-11:30

Swine & Poultry Systems Specialists

FARMER BOY AG INC.

410 E. LINCOLN AVE (RT 422)

MYERSTOWN, PA 17067

PH. 717-866-7565

10-1

Check Our Warehouse Prices



WE SHIP UPS



SEE PAUL, JAY OR STEVE FOR YOUR PARTS AND EQUIPMENT NEEDS



24 Hour Service