

HAMILTON EQUIPMENT, INC.

WHOLESALE DISTRIBUTORS

P.O. Box 478, EPHRATA, PA 17522 PHONE 717-733-7951

For Your Nearest Dealer Please Call Us!

FARMLUND INC.

Round Bale Wrapper and Mover

"Two machines in one" This three point hitch, hydraulic bale wrapper not only wraps bales fast but can be used to move the bales to the barn or feed lot. A one man operation at its' best for feeding high quality balage.



GENERAL SPECIFICATIONS

- Horsepower requirement - 65+ • 2 sets of hydraulic remotes required
- Round bale width - 39" to 60" • Round bale diameter - 54" to 60"
- Wrapping time - approximately 2 minutes



CR Rotary Tedder Rake



100% good clean raking

The CR Rotary Tedder Rake provides effective windrowing of two swaths up to 7'. It also windrows spread crop into one well-shaped and stable swath.

Unique swath rollers

JF's patented swath rollers form a perfect swath for baler or forage harvesters.

Adjusting from spreading to raking is quick & easy - simply change the position of the rake tines by using a spring loaded pin.

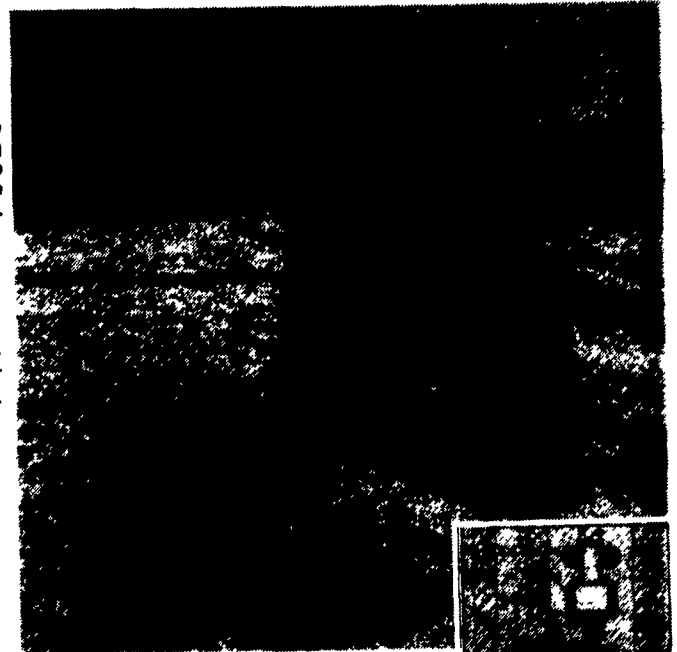

- Working width, raking 9'10"
- Working width, spreading 10'6"
- Transport width 8'10"
- Working speed, max. 10 MPH
- Power consumption 16 HP
- Weight 715 lbs.
- Tire dimension 400x8-4
- Number of rake tines 2x8

500 and 600 gallon TANDEM AXLE HPT SERIES SPRAYERS

from Demco



Model Shown
HPT500DF
60' Truss Boom

Reliable Sprayers

- ◆ 500 or 600 gallon elliptical polyethylene tank with baffle and deep sump for complete drainage.
- ◆ Jet agitation for thorough mixing and excellent chemical suspension.
- ◆ Large 16" fillwell with 4" center cap.
- ◆ Adjustable wheel spacings of 60", 70", or 80" centers. (120" optional)
- ◆ Walking tandem axle trailer with ground clearance settings of 23" or 29", three ton hubs and spindles and 15" x 10" wheels.
- ◆ Large front mounted step, platform, and safety rail for easy filling.
- ◆ Three section boom control.
- ◆ 2 1/2 gal clean water tank for safety
- ◆ Available with 28', 30', 40', 45' or 60' heavy duty truss booms with boom skids, 3/4" boom plumbing, and diaphragm check nozzles.
- ◆ DIFT Flotation boom mount is standard on truss booms.

- ◆ Available with 60' or 80' wheeled booms with 3/4" boom plumbing, diaphragm check nozzles, and 4.80x12" boom carrier wheels with built in suspension.

Pump Packages

- ◆ Demco single or double piston pump with electric shut-off.
- ◆ Hypro belt driven centrifugal pump.
- ◆ Hypro gear driven centrifugal pump.
- ◆ Ace hydraulic driven centrifugal pump.



Large front mounted step, platform and safety rail for easy filling of the tank. Clean water tank is standard

Available With
Hydraulic Fold Booms

THE SPRAY TEAM

55 & 85 GALLON REAR MOUNT SPRAYERS

from Demco



Model Shown
RMB55 28T

- ◆ Hypro 6 roller 540 RPM PTO driven pump (C6500D X).
- ◆ Available with Demco 21' & 28' Truss-T Spray Boom.
- ◆ Boom is completely preassembled with 20" nozzle spacing.
- ◆ TeeValve for selective control of three section spray boom.
- ◆ Seamless Demco polyethylene tank featuring jet agitation, sump, molded sight gauge and 5" fillwell with no-splash cover.
- ◆ Frame has a built in ground stand for easy storage when empty.
- ◆ Three point hitch mounting - Category. "0" & "1".
- ◆ Rear mount comes preassembled.

Folding steel Truss-T boom with horizontal and vertical breakaway.

