

HAMILTON EQUIPMENT, Inc.

P.O. BOX 476
EPHRATA, PA 17022


WHOLESALE DISTRIBUTORS

PHONE 717-733-7951

For Your Nearest Dealer Please Call Us!




MECHANICAL TRANSPLANTER MODEL 1000 TRANSPLANTER

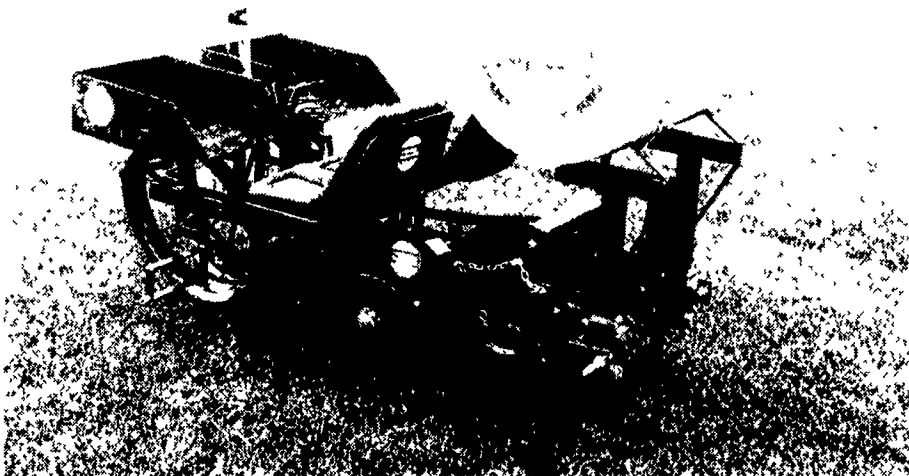

The Mechanical Model 1000 offers spacings as close as 6 inch between plants. This, along with 20 to 30% faster planting speeds, will give you positive drive and unit combination that can't be beat! The Model 1000 is the only unit manufactured today that has the patented independent float wheel system.

MECHANICAL TRANSPLANTER MODEL 90 MULCH LAYER

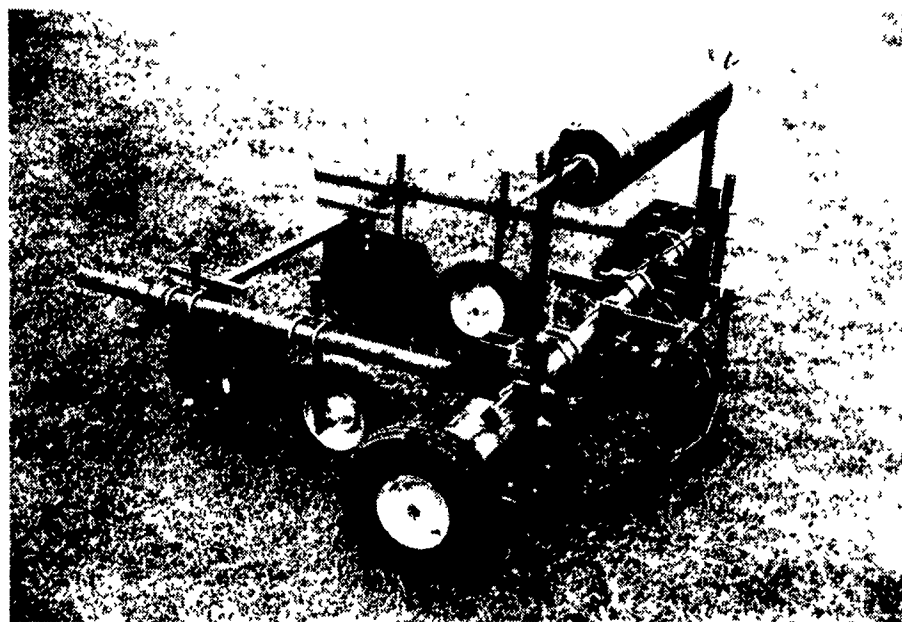

The Mechanical Model 90 will lay 3 foot to 6 foot mulch. Lays mulch over flat ground or slightly raised beds. All parts shown (except plastic roll) are included as standard equipment.

500 and 600 gallon TANDEM AXLE HPT SERIES SPRAYERS

from Demco



Model Shown:
HPT6H60DF
60' Truss Boom

Reliable Sprayers

- 500 or 600 gallon elliptical polyethylene tank with baffle and deep sump for complete drainage.
- Jet agitation for thorough mixing and excellent chemical suspension.
- Large 16" flip-top manway.
- Adjustable wheel spacings of 60", 70", or 80" centers. (120" optional)
- Walking tandem axle trailer with ground clearance settings of 23" or 29", three ton hubs and spindles and 15"x10" wheels.
- Large front mounted step, platform, and safety rail for easy filling.
- Three section boom control.
- 2 1/2 gal. clean water tank for safety.
- Available with 45', 50', or 60' heavy duty truss booms with boom skids,

3/4" boom plumbing, and diaphragm check nozzles.

Pump Packages


- Demco single or double piston pump with electric shut-off.
- Hypro belt driven centrifugal pump.
- Hypro gear driven centrifugal pump.
- Hypro hydraulic driven centrifugal pump.



Large front mounted step, platform and safety rail for easy filling of the tank. Clean water tank is standard

Now Available With Hydraulic Folding Booms

DEMCO METERING PUMP

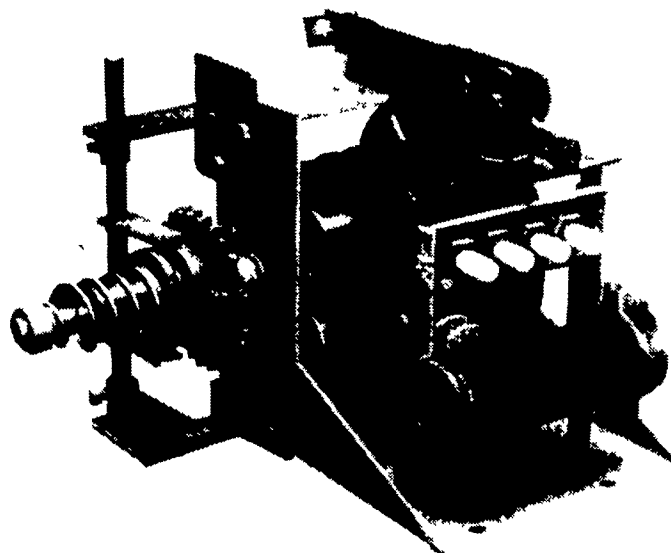

FIELD PROVEN FOR LIQUID STARTER FERTILIZER

- The Demco chain drive metering pump insures positive placement of all band application liquid fertilizers.
- Pumps even heavy analysis fertilizers with no plugging.
- Rate of flow is variable from 3 to 40 gallons per acre (maximum pressure 10 lbs.), without changing the sprockets.
- The pump rollers feature Nylatron bearings which are resistant to corrosive chemicals and will not freeze tight.
- Flow stops when implement stops or is raised.

Demco metering pumps come in 4, 6, 8, 12 or 16 hose models to fit most makes of pull type planters, tool bar planters and tillage implements. • 8, 12, 14 and 16 hose metering pumps also available for grain drills. • Planters, tool bar implements and cultivators without a countershaft, a gauge wheel or some other means of transferring power to the metering pump can use the Demco GDW 10-A ground drive wheel assembly.