


Buy Quality Rhino From Binkley & Hurst Bros. Inc.

Our 3 Pt. Blades Work In Scraping, Grading Applications
Our Rotary Cutters Work Good In Stalk Shredding and
All-Around Mowing And Property Maintenance Applications.

2500 BLADE (2WD, 255 PTO HP TRACTORS MAX.)

Ideal For Grading and
Silage Bunk Leveling


The 2500 blade is available in widths of 10' and 12' and features a massive CAT II-III three-point hitch and quick-hitch. The 12' model is rated for up to 175 PTO HP wheel-type tractors. Hydraulic adjustment of the mainframe swing, moldboard angle, and moldboard tilt is standard for easier operation. The 2500 blade features a maximum of 46" of offset for working hard-to-reach areas. The boxed-section, reinforced 1/2" x 20" moldboard, 4-1/2" solid steel kingpin, and massive hitch and mainframe ensure years of dependable service. Skid shoes, quick-tach end plates, and dual gauge wheels are optional equipment adding to the many possible uses of the 2500 blade.



CY72

Extra Tough Cutter for Extra
Tough Cutting Jobs!

72" Cut, 540 or 1000 RPM, CAT II Heavy-Duty Three-Point Hitch, 140 HP "Rhino-Built" Gearbox (1000 RPM), Cat 4 Shielded Driveline, Slip Clutch Protection, Heavy-Duty Pan Blade Carrier, 3/16" Deck, 1/4"x9" Side Skirts, 1/2"x4" Updraft or Flat Blades, Rated for 4" Diameter Material, Safety Deflectors Standard

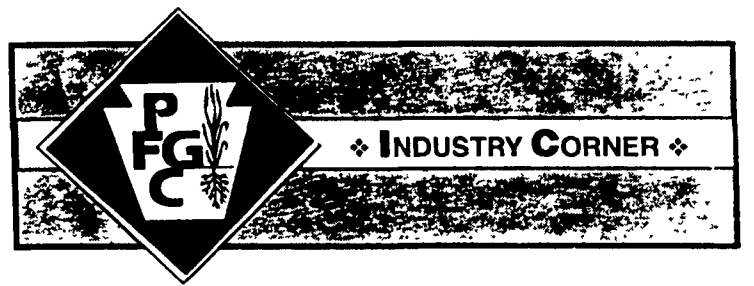

(Continued from Page 18)

4. Seeding rates vary by regions and from farm to farm. Rates are increasing around most of the country — up to 20-30 percent higher than normal. Why? It seems farmers have decided (and found) that as stands thin with age (and they do thin), the thicker stands seem to remain more uniform and battle weeds and grass intrusion with greater success than more conservative rates.

5. Do not harvest fall seedings until next spring or summer for either hay, silage, or grazing. Give the plants a chance to establish themselves. That takes time.

In summary:

Summer fallow and produce a firm seedbed.

Test the soil and apply needed lime and fertilizers accordingly.

Seed shallow and cover the seed lightly/firmly.

Control erosion where it applies.

Dilute potential carryover

herbicides used in row crop production by extra disking if needed.

Use a seeding rate to provide a dense cover that thwarts weeds.


Seed six to eight weeks ahead or historic freeze dates. If irrigation water is available, a good soaking during a drought will really help get better growth to go into the winter.

Hold off harvest until next spring/summer.

Pick the varieties that best suit your program. Up to now, I have said nothing about grazing alfalfa and valid multipurpose alfalfas. They are real and widely accepted. Check with your seed dealer or your county agent or a university extension forage specialist to help you select the one(s) for your farm.




SR15



Rhino Batwing
Cutter With 180
HP Gear Boxes


Heavy-Duty Features!

15 Cut, 540 or 1000 RPM, Cat 5 Main Driveline, Cat 4 or 5 Wing Drivelines, Pan Blade Carriers, 6 Blade Overlap, Mechanical Level-Lift Axle, 10-Gauge Deck, 1/4"x10-1/2" Side Skirts, Full Swivel Clevis Hitch, Replaceable Skid Shoes, Wing Operation 90° Up and 22° Down, Rated for 2" Diameter Material Fully-Shielded Drivelines, Safety Deflectors Standard
15 Foot and 20 Foot Models In Stock



Quality
3 Pt. Post
Hole Diggers
With Augers
Double Flighting
and Slip Clutch
12" Augers


3 Pt. 5 Foot Rake In Stock



Less Gauge
Wheels




Order One From
Binkley & Hurst
Bros. Today
Clean Up Those Creeping
Fence Lines Today!



SE's

Tough and Economical Family of Cutters! 4', 5', 6' and 7' Models, 540 RPM, Shear Bolt or Slip Clutch Protection, Pan Blade Carriers, Updraft Blades, CAT I Three-Point Hitch, CAT II Three-Point Hitch (SE7), Rated for 1" Diameter Material, Safety Deflectors Standard

1540




A Heavy-Duty Blade for Heavy-duty Work

8" or 10" Moldboard Rated for 190 and 160 PTO HP Tractors, Respectively; Hydraulic or Manual Mainframe Swing, Moldboard Pivot, and Moldboard Tilt; 37" Maximum Offset; 4" Kingpin, CAT II, III Three-Point Hitch and Quick Coupler, 1/2"x18" Moldboard; 1/2"x6" Replaceable Cutting Edge; 1447-1618 Lbs.; End Plates, Skid Shoes, Gauge Wheel Optional.

IN STOCK AT
BINKLEY & HURST NOW!

10 FOOT IN STOCK

ST Tiller




Setting Standards For Performance and Durability!

40 47 55 63 and 70 Tilling Widths, Shear Bolt Driveline and Chain Rotor Drive (40 47 and 55) Slip Clutch and Gear Rotor Drive (63 and 70), Four Knives per Flange Adjustable Skid Shoes, Adjustable Rear Deflector Double Lug Lower Three Point Hitch 540 RPM Cast Gearbox Rear Shield Standard
Check For Sizes In Stock

900 BLADE

(2WD, 125 PTO
HP Tractors
Max.)



End Plates are
Optional Equipment

8 Foot
IN STOCK

The 900 blade is available in widths of 7', 8', and 9' and features a heavy-duty CAT I-II three-point hitch and CAT II quick-hitch. The 9' model is rated for up to 95 PTO HP wheel-type tractors. Mainframe swing, moldboard angle, and moldboard tilt adjustments are easily made by relocating the index pins manually. Maximum offset from the center line of the tractor is 30" for working outside dual wheels. The 900 blade features a 3" diameter solid steel kingpin and a reinforced 3/8" x 17" moldboard to withstand the horsepower of larger tractors. The circular moldboard carrier plate allows adjustments throughout the full 360 degrees of moldboard angle to help accomplish numerous jobs easily. The quick-tach end plates are a helpful feature when trying to move or level bulk material, including loose soil or gravel. Skid shoes, quick-tach end plates, CAT II quick coupler bushings, and a gauge wheel are optional equipment.



950

A Very Durable and
Versatile Blade! 9" In Stock

7' or 8' Moldboards Rated for 125 PTO HP Maximum, 9' Moldboard Rated for 95 PTO HP Maximum, Hydraulic or Manual Mainframe Swing, Moldboard Pivot, and Moldboard Tilt, 30" Maximum Offset, 3" Kingpin, CAT I, II Three-Point Hitch and Quick Coupler, 3/8" x 17" Moldboard, 1/2" x 6" Replaceable Cutting Edge, 817-983 Lbs., End Plates, Skid Shoes, Gauge Wheel Optional

The Rhino® SE8 and SE10 are economical rotary mowers designed to help maintain larger acreages of grass, weeds, stalks, or material up to 1" in diameter.

The streamlined close-coupled design allows economical operation on tractors as small as 30 horsepower on the SE8 and 45 horsepower on the SE10. The 85 HP center gearbox and 60 HP outboard gearboxes are protected from sudden shockloads by a slip clutch on the main driveline and torque dampeners on the side drivelines. Pan blade carriers help the unit glide over field obstacles and updraft blades with a 4 blade overlap provide a clean cut. The SE8 is available as a 540 RPM unit with either a CAT II lift or clevis pull type hitch to fit a range of tractors. The SE10 is available with either a heavy duty CAT II III Q.H. or pull type hitch for 540 or 1000 RPM tractors. The 10 gauge deck is reinforced front-to-rear and side-to-side for optimum strength. The Cat 4 main driveline and all gearboxes are fully shielded for greater operator safety. Front and rear safety deflectors are standard equipment to help reduce the risk of damage or injury due to thrown objects. Front and rear chain guards are optional equipment. Compare and you will see why the Rhino SE8 and SE10 are excellent choices for economical wide cut mowers.





SE8
SE10
In Stock

Binkley & Hurst Bros. Inc. Has A REAL High Dump Wagon In Stock

Ask About Good Financing Terms

Jump on a REAL wagon with a RICHARDTON Series 700



Richardton makes the best high dump wagons...bar none!

Accept no imitations. When you want —

- Close access to your truck
- A 45 degree dump angle
- A hi-tech, non-grease slide system
- A positive action roof opener
- A reinforced box
- A simple, efficient cable system
- A sleek, selfcleaning wagon
- Options to fit your needs
- Less than one minute cycle time
- The best warranty in the business

Demand the best...Demand a Richardton Wagon!
Available at your REAL Wagon dealer



Richardton
Manufacturing Company
A UNITED DOMINION COMPANY

BINKLEY & HURST BROS. INC.

Fax 717-626-0996

133 Rothsville Station Rd.

P.O. Box 0395

Lititz, PA 17543-0395

(717) 626-4705 1-800-414-4705



BINKLEY & HURST BROS. INC.

Fax 717-626-0996

133 Rothsville Station Rd.
P.O. Box 0395, Lititz, PA 17543-0395
(717) 626-4705 1-800-414-4705

