


THE UNLOADER FOR HIGH MOISTURE GRAINS

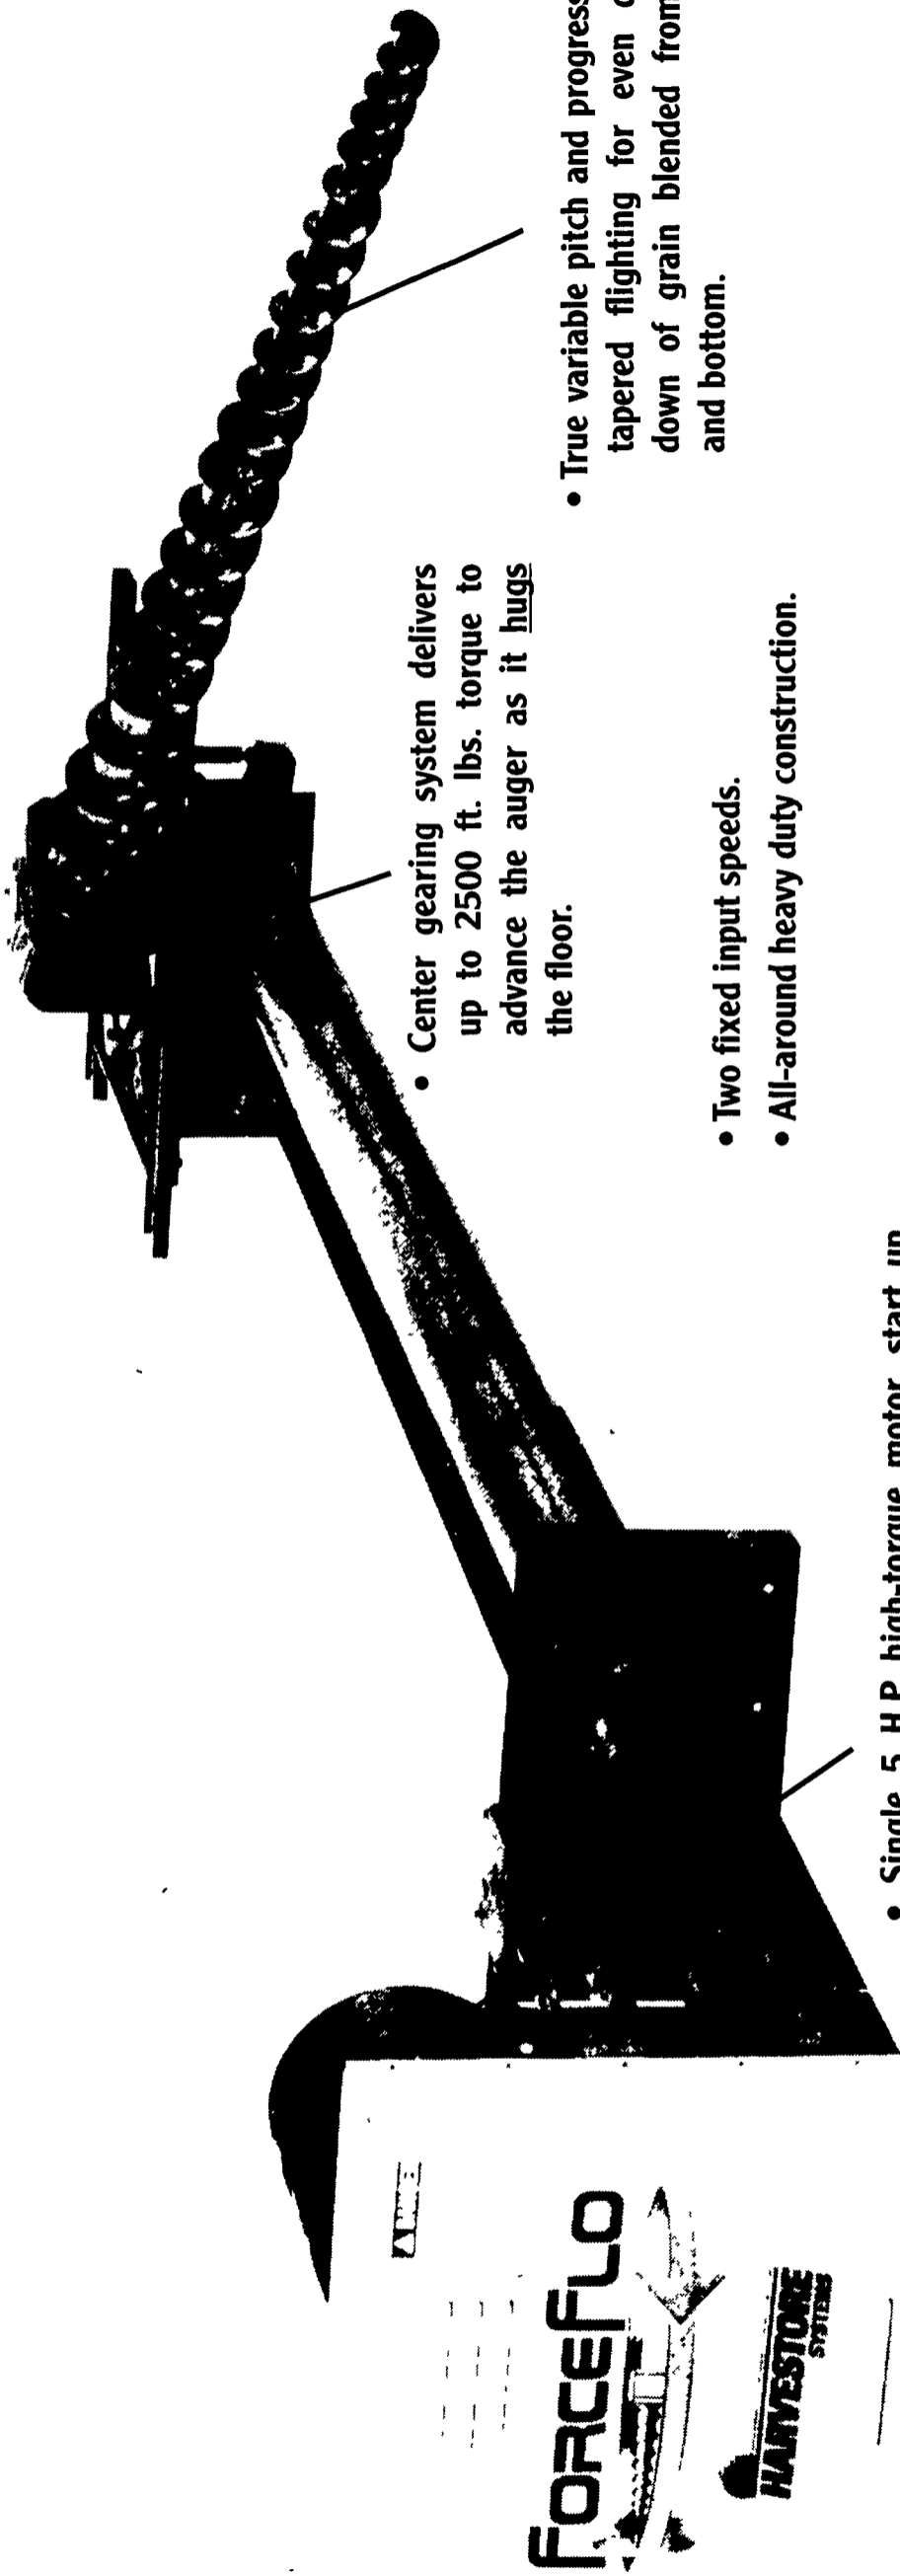

- Center gearing system delivers up to 2500 ft. lbs. torque to advance the auger as it hugs the floor.


- True variable pitch and progressively tapered flighting for even draw-down of grain blended from top and bottom.

- Two fixed input speeds.
- All-around heavy duty construction.

- Single 5 H.P. high-torque motor, start up rated at 15 to 20 H.P. (coupled to a double reduction parallel shaft main drive), is designed to take the shock load of up to a 25' x 88' Harvestore® structure.



For your convenience now accepting



PENN JERSEY PRODUCTS, INC.
 YOUR LOCAL INDEPENDENT AUTHORIZED HARVESTORE® SYSTEMS DEALER
 P.O. BOX 7 • NEW HOLLAND, PA 17557 • 717-354-4051

Belleville, PA
 800-310-9333
 Rory Peachey, Mgr.

Everett, PA
 814-652-2934
 Frank Samuel, Jr., Mgr.

Berlin, PA
 800-434-3308
 Joe Simpson, Mgr.

Newville, PA
 717-776-3397
 Maynard McCullough, Mgr.

Columbus, NJ
 609-298-7136
 Charles Van Mater, Mgr.

In Maryland
 800-354-4052

The results you may achieve with your Harvestore® System depend primarily upon your management skills and may vary from successful results achieved by others. Any application in a particular farming operation requires the advice of qualified experts and is subject to limitations of good management, weather or other conditions present at the individual location. Harvestore is a registered trademark of A.O. Smith Engineered Storage Products Co.