

HAMILTON EQUIPMENT, Inc.

P.O. Box 478,
EPHRATA, PA 17522

WHOLESALE DISTRIBUTORS


PHONE 717-733-7951

For Your Nearest Dealer Please Call Us!




VISIT OUR EXHIBIT AT KEYSTONE FARM SHOW - BOOTH 438B OLD MAIN BUILDING

RJ Pulverizers

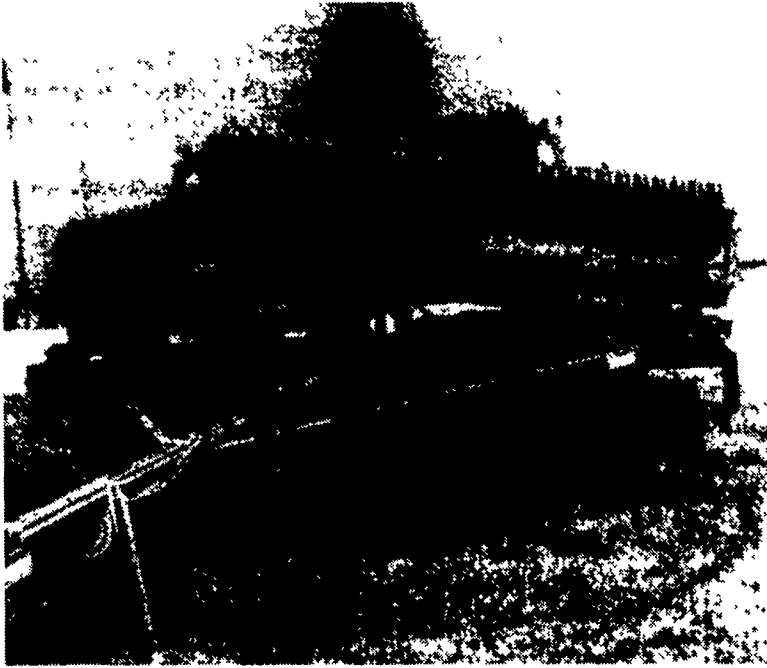

Available in sizes from 3 foot to 40 foot. Available with 15 inch sprocket wheels, 18 inch crowfoot wheels, 15 inch ductile wheels, or 20 inch ductile wheels. Flat fold wing packers feature a narrow 10 foot 4 inch transport width with a center bearing on the center section.


Amco DOUBLE OFFSET TANDEM HARROWS

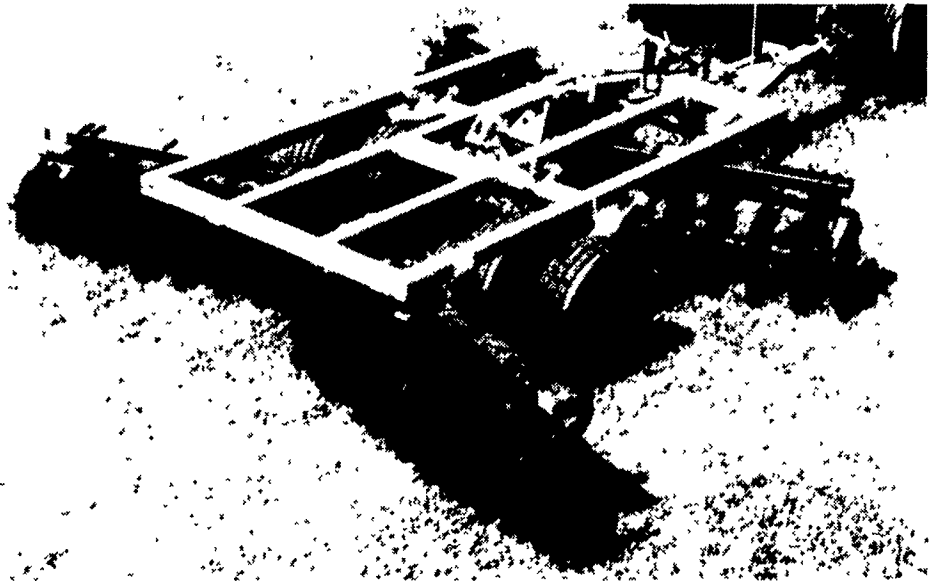

Model F17B available in sizes from 9'3" to 15'0". Model F15B Flexwings available in sizes from 16'6" to 24'0". Standard features include 1-1/2" square high carbon cold rolled steel axles, triple-sealed Protect-O-Shield regreasable ball bearings, reversible clevis, and heavy duty scrapers. Optional Shock Absorber Gang Risers are available for rocky conditions.

THE SPRAY TEAM

55 & 85 GALLON REAR MOUNT SPRAYERS

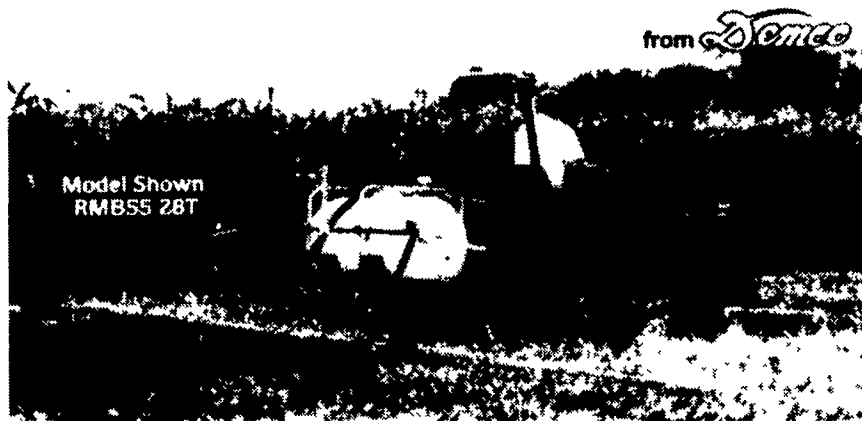

Model Shown
RMB55 28T

from Demco


- ◆ Hypro 6 roller 540 RPM PTO driven pump (C6500D X).
- ◆ Available with Demco 21' & 28' Truss-T Spray Boom.
- ◆ Boom is completely preassembled with 20" nozzle spacing.
- ◆ TeeValve for selective control of three section spray boom.
- ◆ Seamless Demco polyethylene tank featuring jet agitation, sump, molded sight gauge and 5" fillwell with no-splash cover.
- ◆ Frame has a built in ground stand for easy storage when empty.
- ◆ Three point hitch mounting - Category. "0" & "1".

Folding steel Truss-T boom with horizontal and vertical breakaway.



500 and 600 gallon TANDEM AXLE HPT SERIES SPRAYERS

from Demco

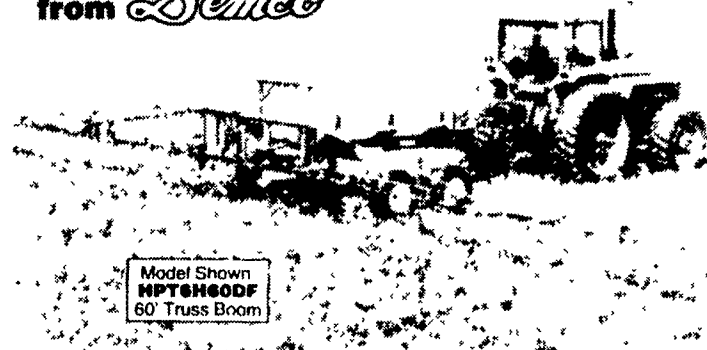

Model Shown
HPT6H60DF
60' Truss Boom


Reliable Sprayers

- 500 or 600 gallon elliptical polyethylene tank with baffle and deep sump for complete drainage.
- Jet agitation for thorough mixing and excellent chemical suspension.
- Large 16" flip-top manway.
- Adjustable wheel spacings of 60", 70", 80" centers. (120" optional)
- Walking tandem axle trailer with ground clearance settings of 23" or 29", three ton hubs and spindles and 15"x10" wheels.
- Large front mounted step, platform, and safety rail for easy filling.
- Three section boom control.
- 2 1/2 gal. clean water tank for safety.
- Available with 45', 50', or 60' heavy duty truss booms with boom skids,

3/4" boom plumbing, and diaphragm check nozzles

Pump Packages

- Demco single or double piston pump with electric shut-off.
- Hydro belt driven centrifugal pump.
- Hydro gear driven centrifugal pump.
- Hydro hydraulic driven centrifugal pump.



Large front mounted step, platform and safety rail for easy filling of the tank. Clean water tank is standard.

Now Available With Hydraulic Folding Booms