

WE GOT IT! See BINKLEY & HURST BROS. INC. For 0% FINANCING ON A NEW HIGH QUALITY GEHL SKID LOADER with Credit Approval

SKID LOADERS THAT GET THE JOB DONE!



If You Want Speed, We Got It!
2 Speed Power Shift up to 12-1/2 MPH
Want Power? We Got It!

80 HP TURBO DIESEL Available with Dual Hand Controls Same As Case Unloader OR Gehl T-Bar OR Hand & Foot Controls

Stability and Lifting Power From Our Long Wheel Base Machines Plus Visibility with Our Power View Loader Boom

Built tough to take the roughest excavation site skid steer punishment that can possibly be given - Try a Gehl from Binkley & Hurst with the attachments you need (Sales & Rentals)

Get A Gehl From Binkley & Hurst Today!

GEHL One Super Machine! One Super Deal!






2 Speed Power Shift, Travel Up to 12-1/2 MPH

3600 Lb Tip Up Capacity, Powered by 56 HP Oil

Cooled Diesel, Long 42" Wheel Base for More Stability Also Equipped with 72" Wide Bucket, Universal Quick Attach

See Binkley & Hurst Bros. Today

THE ALL-NEW SL 4635 & 4835



GEHL'S EXPANDED "35 SERIES" Now More Versatile Than Ever!

Gehl's all-new "35 Series" line offers the most advanced design in skid loader history. Now with increased lift and unsurpassed visibility, plus more power, they handle a broad range of applications. The line includes two new models - the SL 4635 and 4835. Highly maneuverable with exceptional stability, they get the job done in tight confines. Like all "35 Series" skid loaders, they offer built-in features for easy maintenance and user comfort. Reliable and efficient, Gehl will match your skid loader needs.

GEHL Construction Tough

Gehl SL 3825 - 33 HP Diesel with Tip Up Rating of 2,000 Lbs

SL 4635 - 44 HP Oil-Cooled Diesel, 1425 Pound Lift Capacity, 37 Inch Wheelbase, Basic No-Options Loader, Tip Up Loader Capacity of 2,850 Lbs

SL 4635 SX - 44 HP Oil-Cooled Diesel, 1425 Pound Lift Capacity, 37 Inch Wheelbase, Deluxe Loader with 18 gpm std Flow Hydraulics, Tip Up Loader Capacity of 2,850 Lbs

SL 4635 DXT - 57 HP Turbo-charged Oil-cooled Diesel, est 1425 Pound Lift Capacity, 37 Inch Wheelbase, Deluxe Loader with 18 gpm Standard, 27 gpm Hi-Flow Auxiliary Hydraulics, Tip Up Loader Capacity of 2,850 Lbs

SL 4835 SXT - 57 HP Turbo-Charged Oil-Cooled Diesel, ext 1625 Pound Lift Capacity, 41 Inch Wheelbase, Deluxe Loader with 18 gpm Standard Flow Auxiliary Hydraulics, Tip Up Loader Capacity of 3,250 Lbs

SL 4835 DXT - 57 HP Turbo-Charged Oil-Cooled Diesel, est 1625 Pound Lift Capacity, 41-inch Wheelbase, Deluxe Loader with 18 gpm Standard, 27 gpm Hi-Flow Auxiliary Hydraulics, Tip Up Loader Capacity of 3,250 Lbs

SL 5635 - 60 HP Optional 80 HP Turbo Diesel, Oil-Cooled Diesel with Service Intervals at 500 Hour for Engine Oil Due to Engineering Capacities, 42" Length Wheel Base for more Stability and Power View Boom for Higher Loader Lift and Loading Abilities, Aux Hyd at 20 GPM, Optional High Flow at 33 GPM, Loader Tip Up Capacity at 3600 Lbs

SL 6635 - 80 HP Turbo Diesel with 48" Stretch Wheel Base Greatly Increase Stability, Reach and Loader Capacity with Tip Up Rating of 4,600 Lbs 2 Speed On-the-Go Power Shift with Travel Speeds up to 12-1/2 mph Lever Controls Available in Dual Hand Similar to Case Hand and Foot, Similar to NH & Bobcat, Gehl T-Bar

See Binkley & Hurst Bros. Today!
0% Interest Deals Are Hard To Beat!

BINKLEY-HURST BROS. INC.



133 Rothsville Station Rd.
P.O. Box 0395, Lititz, PA 17543-0395
(717) 626-4705 1-800-414-4705 Fax (717) 626-0996
www.binkleyhurst.com


Binkley & Hurst Bros. Stocks High Quality Rhino Machinery

A Great Time To Trim Back Those Fence Lines With A Rhino Boom Mower!

The Servis® 1548 hydraulic boom flail cutters are designed for mowing grass and cutting brush in hard-to-reach areas including roadsides, ditchbanks, ponds, and fence rows. Large model with up to 15 foot horizontal reach and up to 4" diameter brush cutting



1548

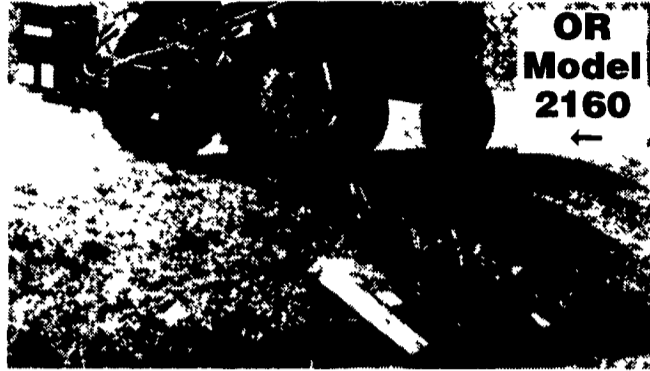

OR Model 2160



With 22 Foot Reach with Rotary Head. Versatile Boom Rotary Cutter! 60" Cutting Width, 21' Maximum Horizontal Reach; 22-1/2' Maximum Vertical Reach; 190 Degree Range of Head Movement; Independent Hydraulic Drive; 60 Gallon Oil Capacity, Pan Blade Carrier; 1/2" x 4" Updraft Blades, 540 or 1000 RPM, 18,850 FPM Blade Tip Speed; CAT II-III Quick Hitch or Three-Point Hitch, Rated for 2" Diameter Material on an Intermittent Basis; 80 HP Tractor Recommended (Min), Safety Deflectors Standard, Not Intended for Commercial Contractor Use

SM 61 Roto Tiller, 3 Pt.
SM 81 Roto Tiller, 3 Pt.
SH 90 Roto Tiller, 3 Pt.
New 3 Pt. Hyd. Drive Post Hole Digger

SPHD Super Heavy Duty 3 Pt. Post Hole Digger, 5 Year Warranty in 6-Bar Box, 12" Auger 6"-, 7"-, and 8"- 3 Pt. Blades

FM 100" 3 Pt. Finish Mower

TW 72 3 Pt. Mower 6' DB 150 5' Rotary Ditch Bank Mower

TW 84" 3 Pt. Heavy Duty Mower

TW 96, 96" Cut

TW 120, 120" Cut

Up To 85 HP Rating **800**



Medium-Duty Blade at an Economical Price!



SR15

Rhino Batwing Cutter With 180 HP Gear Boxes


Heavy-Duty Features!
15 Cut, 540 or 1000 RPM, Cat 5 Main Driveline, Cat 4 or 5 Wing Drivelines, Pan Blade Carriers, 6' Blade Overlap, Mechanical Level-Lift Axle, 10-Gauge Deck, 1/4"x10-1/2" Side Skirts, Full Swivel Clevis Hitch, Replaceable Skid Shoes, Wing Operation 90" Up and 22" Down, Rated for 2" Diameter Material Fully-Shielded Drivelines, Safety Deflectors Standard
15 Foot and 20 Foot Models In Stock

Quality 3 Pt. Post Hole Diggers with Augers



Double Flighting and Slip Clutch 12" Augers

Purchase Quality Rhino Machinery From Binkley & Hurst Bros.



If It's Snow Removal Or Heavy Duty Excavating, You Need A Rhino Blade From Binkley & Hurst Bros. Now!
The LR Blade has been setting the standard in medium-duty blades for over 20 years. The LR is ideal for road maintenance, soil leveling, ditching and terracing work or feedlot cleanup on tractors. Durability and ruggedness are built into every LR with features including a 2" solid steel kingpin and a 5/16" thick moldboard. Versatility is provided by the LR's three basic mechanical adjustments: moldboard tilt, pivot, and mainframe swing which add up to a total of 22 non-wrench adjustments.



Pick Up A Blade From Binkley & Hurst Today!

RHINO	HP Rating	
LR 7'	65	3 Way Adjust Manual
LR 8'	65	3 Way Adjust Manual
R 900 - 8'	125	3 Way Adjust Manual
R 900 - 9'	95	3 Way Adjust Manual
R 950 - 8'	125	3 Way Hyd.
R 950 - 9'	95	Hyd. Swing Manual Tilt Hyd. Pivot Manual Tilt
1540 - 10'	160	3 Way Hyd. Adj.

Quality 3 Pt. Scraper & Excavating Blades

If You Have A Compact Tractor Or A Large Farm Tractor, We Have A 3 Pt. Blade For YOU! STOP IN AND SEE BINKLEY & HURST NOW!



SE's
Tough and Economical Family of Cutters!

4', 5', 6' and 7' Models, 540 RPM, Shear Bolt or Slip Clutch Protection, Pan Blade Carriers, Updraft Blades, CAT I Three-Point Hitch, CAT II Three-Point Hitch (SE7); Rated for 1" Diameter Material, Safety Deflectors Standard.



3500 Super Heavy-Duty Blade for Large Tractors!
12' or 14' Moldboard, Rated for 300 and 250 HP Tractors Respectively, Hydraulic Mainframe Swing, Moldboard Pivot, and Moldboard Tilt, 50" Max Offset, 5" Kingpin, CAT III-IV Three-Point Hitch and Quick Coupler, 1/2" x 20" Moldboard, 1/2" x 6" Replaceable Cutting Edge, 3463-3603 Lbs. (Approx), End Plates; Skid Shoes; Dual Gauge Wheels Optional.

3 PT. FINISH MOWERS



60", 72" & 100" In Stock For Immediate Availability!


CY72



Extra Tough Cutter for Extra Tough Cutting Jobs!

72" Cut, 540 or 1000 RPM, CAT II Heavy-Duty Three-Point Hitch, 140 HP "Rhino-Built" Gearbox (1000 RPM), Cat 4 Shielded Driveline, Slip Clutch Protection Heavy-Duty Pan Blade Carrier 3/16" Deck, 1/4" x 9" Side Skirts 1/2" x 4" Updraft or Flat Blades, Rated for 4" Diameter Material, Safety Deflectors Standard

SE8 In Stock

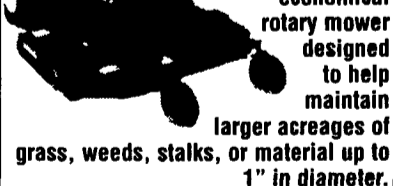

The streamlined, close-coupled design allows economical operation on tractors as small as 30 horsepower on the SE8 and 45 horsepower on the SE10. The 85 HP center gearbox and 60 HP outboard gearboxes are protected from sudden shockloads by a slip clutch on the main driveline and torque dampeners on the side drivelines. Pan blade carriers help the unit glide over field obstacles and updraft blades with a 4" blade overlap provide a clean cut.

Heavy-Duty Features!
15' Cut, 540 or 1000 RPM, Cat 5 Main Driveline, Cat 4 or 5 Wing Drivelines, Pan Blade Carriers, 6' Blade Overlap, Mechanical Level-Lift Axle, 10-Gauge Deck, 1/4"x10-1/2" Side Skirts, Full Swivel Clevis Hitch, Replaceable Skid Shoes, Wing Operation 90" Up and 22" Down. Rated for 2" Diameter Material Fully-Shielded Drivelines Safety Deflectors Standard 15 Foot and 20 Foot Models In Stock


ST TILLER

Good For Fall Lawn Seeding! Setting Standards For Performance and Durability!



40", 47", 55", 63" and 70" Tilling Widths; Shear Bolt Driveline and Chain Rotor Drive (40", 47" and 55"), Slip Clutch and Gear Rotor Drive (63" and 70"), Four Knives per Flange; Adjustable Skid Shoes; Adjustable Rear Deflector, Double-Lug Lower Three Point Hitch, 540- RPM; Cast Gearbox; Rear Shield Standard
Check For Sizes In Stock!


SE10



Pull-Type

The pull-type SE10 requires only a 45 HP (min.) tractor for economical, wide-cut mowing. A hydraulic cylinder or ratchet lift screw is available for raising and lowering the mower. A spring shock absorber is optional to help cushion shockloads to the mainframe when operating in rough terrain. (Unit shown with optional chain guards. Deflectors are standard.)

SE15



Rhino Batwing Cutter With 160 HP Gear Boxes

BINKLEY-HURST BROS. INC.

133 Rothsville Station Rd.
P.O. Box 0395
Lititz, PA 17543-0395

(717) 626-4705
1-800-414-4705
Fax 717-626-0996
www.binkleyhurst.com

