

**STOLTZFUS TRACTOR SERVICE**  
 Rebuilding engines, transmissions,  
 PTO's, Tune-ups.  
 Fuel Injection System Repair  
**1715 Beaver Valley Pike,**  
**Strasburg, PA 17579**  
**717-786-0256**

**BLUE RIDGE REPAIR**  
 Tractor & Equipment Repair  
**Your Shop or Ours!**  
 Roll Back Service Available  
**Nelson Horst**  
 128 Shady Road, Newburg, PA 17240  
**717-423-6924**

**1 FARM EQUIPMENT**  
 Flat truck bodies, 27 ft w/bulk head & sides. 19 ft flatbed. Buster Bar 14 ft for disc or cultivator. Set of 16.9x24 tires & wheels for JD MFWD, 90%. 814-344-6309

1586 Int'l tractor, C&A, 1000 shaft, duals, \$8,500. 814-784-5459.  
 8' Bush Hog no-till drill, field ready, \$3,700 OBO. 717-442-9173.  
 NH 782 harvester, p/u, very good knives. Lebanon 717/274-3775 No Sunday calls

IH 5088 4WD, exc cond, 410-596-1400.  
 IH 1086 cab, 20.8x38 factory 8 spd, \$8500. 79 Ford 350 farm truck, \$500. Gehl 910 wagon, shed kept, \$1500. 18.4x30 tires, on IH rims, 25%, \$200. 717-694-3099


**NOW IS THE TIME TO SEE BINKLEY & HURST BROS. FOR HIGH QUALITY RHINO MACHINERY**

**SEE US FOR YOUR NEXT 3 PT. TILLER**



Setting Standards For Performance and Durability!

**UNIVERSAL QUICK ATTACH SKID LOADER MOWER SM60**




**3 PT. FINISH MOWER**





Finish Mowers In Stock:  
 Rear Discharge Mowers  
 72" Wide  
 84" Wide  
 100" Wide

**QUALITY 3 PT. POST HOLE DIGGERS w/AUGERS**




Double Flighting and Slip Clutch  
 12" Augers

The SM60 skid steer mower from Servis-Rhino® and your skid steer loader can tackle a range of industrial, commercial, and agricultural mowing jobs.


**TW120**



The TW120 cuts a 120" swath of material. The center gearbox, rated at 120 HP, transfers power to the 100 HP outboard gearboxes. Torque dampeners on both sides of the center gearbox help prevent driveline and gearbox damage caused from sudden shockloads. Massive 2-3/8" diameter output shafts in the outboard gearboxes help provide optimum service. The pull-type and semi-mount units require a 50 HP (min) tractor and the lift-type unit requires a 60 HP (min) tractor (with adequate front weights)

TW120 - 10' Cut • TW84 - 7' Cut • TW72 - 6' Cut

**1540**



A Heavy-Duty Blade for Heavy-Duty Work!  
 10 Foot up to 190 HP

**SE15 Rhino Batwing Cutter**  
 With 160 HP Gear Boxes



Heavy-Duty Features!  
 15' Cut, 540 or 1000 RPM Cat 5 Main Driveline, Cat 4 or 5 Wing Drivelines, Pan Blade Carriers, 6' Blade Overlap, Mechanical Level-Lift Axle, 10-Gauge Deck, 1/4"x10-1/2" Side Skirts, Full Swivel Clevis Hitch, Replaceable Skid Shoes, Wing Operation 90° Up and 22° Down. Rated for 2" Diameter Material Fully-Shielded Drivelines, Safety Deflectors Standard. 15 Foot and 20 Foot Models In Stock

**REAR BLADES (10 HP to 65 HP)**

**SERVIS-RHINO®... THE REAR BLADE LEADER**



has a rugged rear blade ready to work for you on 20 HP to 65 HP tractors. Additionally, you have the assurance that each Rhino® rear blade is designed and built based on over 50 years of blade building experience to make you the most productive and offer you the best value

Model 350 - 6 Foot • Model R500 - 6 Foot  
 Model R500 - 7 Foot


Baffling under the deck directs cut material out the left side of the mower, and away from the skid steer Free-swinging updraft blades and high blade tip speeds help ensure a clean cut. The pan blade carrier is reinforced with a 3/4" steel plate for strength and durability. The SM60 has square shouldered blade bolts that cannot turn in the blade carrier eliminating the risk of premature failure.

A hydraulic relief valve in the drive motor provides overload protection for greater dependability. The smooth deck design helps make clean off easy. Optional front mounted skid shoes help prevent "bottoming out." The flexible hitch linkage allows the unit to follow ground contours more easily

**Cutting Width: 60"**

The skid steer loader must be equipped with an operator front protective door. Contact your skid steer manufacturer or an authorized dealer for equipping your loader with a protective door.

**SE10**



Pull-Type

The pull-type SE10 requires only a 45 HP (min) tractor for economical, wide-cut mowing. A hydraulic cylinder or ratchet lift screw is available for raising and lowering the mower. A spring shock absorber is optional to help cushion shockloads to the mainframe when operating in rough terrain (Unit shown with optional chain guards Deflectors are standard)

**TW96**



Medium-Duty Cutter with Heavy-Duty Features!

96" Cut, 120 HP Center Gearbox, 90 HP Outboard Gearboxes, Pan Blade Carriers, Updraft Blades, Cat 4 Driveline, Slip Clutch Protection, Lift or Pull-Type, 540 or 1000 RPM, Replaceable Skid Shoes, Rated for 2" Diameter Material, Safety Deflectors Standard

**Now Is a Great Time To Trim Back Those Fence Lines With A Rhino Boom Mower**



The Servis® 1548 hydraulic boom flail cutters are designed for mowing grass and cutting brush in hard-to-reach areas including roadsides, ditchbanks, ponds, and fence rows. Large model with up to 15 foot horizontal reach and up to 4" diameter brush cutting.

**1548**  
 Also Model 2160 In Stock!

**RHINO Quality**

**SE's**



Tough and Economical Family of Cutters!

5', 6' and 7' Models, 540 RPM, Shear Bolt or Slip Clutch Protection, Pan Blade Carriers, Updraft Blades, CAT I Three-Point Hitch, CAT II Three-Point Hitch (SE7), Rated for 1" Diameter Material, Safety Deflectors Standard

5 and 6 Foot

Three-Point Hitch Backhoes  
 Ditchbank Mowers  
 Rotary Cutters  
 Rear Blades  
 Flail Mowers  
 Three-Point Hitch Boom Mowers  
 Finishing Mowers  
 Pasture Renovators  
 Post Hole Diggers  
 Rotary Shredders  
 Rotary Mowers  
 Landscape Rakes  
 Rotary Tillers  
 Flex Wing Cutters




Available at Binkley & Hurst Bros. Inc. at a Tremendous Spring Discount Price - Don't Miss It!

**MISCELLANEOUS 3 PT. TILLERS, MOWERS AND POST HOLE DIGGERS**

ST 55 Tiller • ST 63 Tiller  
 SM 61 Tiller • SM 70 Tiller  
 SM 81 Tiller • 3 Pt. Post Hole Digger  
 3 Pt. Hyd. Post Hole Digger  
 3 Pt. 5' Finish Mower  
 3 Pt. 6' Finish Mower  
 3 Pt. TW 84 Dual Tail Wheel, 2" Cutting Cap, 90 HP Gear Box

**DB150.** Over 30 years of hydraulic mower design experience has made the Rhino® DB150 the preferred choice of experienced operators for the mowing of pond banks, levees, drainage ditches, and hard-to-reach areas

The DB150 can extend to a maximum of 158" from the center line of the tractor allowing the 60 inch rotary head to cut areas that are difficult or impossible to reach with ordinary mowers. By being hydraulically driven, maintenance is greatly reduced with the absence of belts and pulleys. The DB150 outperforms many competitive units with smaller hydraulic systems. The DB150 utilizes a 60 gallon hydraulic system which allows the unit to run cooler in tough mowing conditions. The large reservoir also serves as a counterweight and remains stationary on the mainframe, eliminating the potential traffic hazard of a movable counter-balance weight. The DB150 features a heavy-duty three-point hitch using a lower double lug hitch system to fit a wide range of tractors. To help insure a clean cut, the DB150 features updraft blades and a blade tip speed of 20,028 FPM.

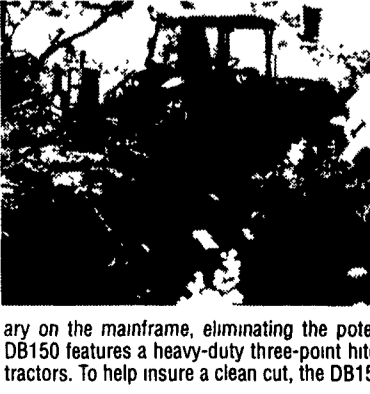

**CY72**




Extra Tough Cutter for Extra Tough Cutting Jobs!

72" Cut, 540 or 1000 RPM, CAT II Heavy-Duty Three-Point Hitch, 140 HP "Rhino-Built" Gearbox (1000 RPM), Cat 4 Shielded Driveline, Slip Clutch Protection, Heavy-Duty Pan Blade Carrier, 3/16" Deck, 1/4"x9" Side Skirts; 1/2"x4" Updraft or Flat Blades, Rated for 4" Diameter Material, Safety Deflectors Standard.

6 Foot Cut

**800 Up To 85 HP Rating**



Medium-Duty Blade at an Economical Price!

**OTHER 3 PT. BLADES IN STOCK**

55 HP Rating 350 - 6' & 7'  
 65 HP Rating 500 - 6'  
 95 HP Rating 900 - 9'  
 125 HP Rating 900 - 8'

**BINKLEY-HURST BROS. INC.**



133 Rothsville Station Rd.  
 P.O. Box 0395, Lititz, PA 17543-0395  
 (717) 626-4705 1-800-414-4705 Fax (717) 626-0996