


Milking Equipment & Stalls

Walk-Through Milking Parlor

Ideal for flat floor installations

Features:

- Unique latch system operated by rod linkage, keeps doors in unlocked position until cow has exited.
- Cam balanced spring automatically resets door for next cow.
- Smooth, quiet operation with UHMW synthetic bushings on door hinges & soft rubber bumpers used on stops.
- Heavy duty frame, manufactured using 3 x 1 1/2 x 3/16 tubing.
- Brass ball joints on linkage and brass bushings in latch.
- Overall height is 71 1/2".
- Versatile rack holds any type milking equipment.

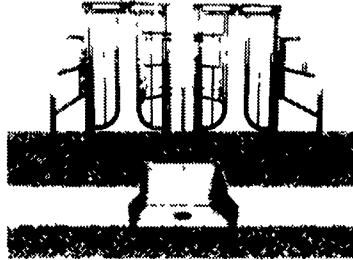


Upgrade or expand your current facility & stay in your budget!

Suspended Comfort Stalls

Install the Best!
Durable • Dependable



SS-45



SS-25




SS-45G

- Increased cow comfort.
- Powder coated surface stays cleaner.
- Easy access.
- Adjustable tie rail.



Loop Stalls

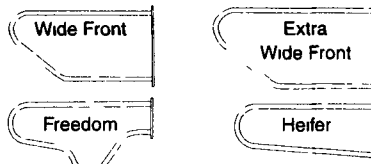

Available in 4', 5', 6'6", 6'9", & 7' Finish protects against rust, chipping, and chemical deterioration


Wide Front Loop Stalls

Versatile design offers greater cow comfort
Generous lunge space for head & neck between top and bottom of loop

Heavy duty construction with 2 3/8" outside diameter high yield steel tubing with 12 gauge (108) wall
Spray arc transfer method used on welds



Added Value With Our 2 Coat Process!



- 1 Five step metal preparation, including iron phosphate conversion coating, to enhance adhesion & prevent undercoat corrosion
- 2 Zinc rich epoxy powder undercoat
- 3 TGIC polyester powder top coat baked at 400° to fuse coats, forming a cross link molecular bond




All metal parts are spray arc and have Zimmerman Powder Coatings to assure a durable finish that will last to the end of the life of the equipment.

Farm

Feeder Wagon


This feeder with Zimmerman adjustable headlocks is ideal for animals 10 months or older. The headlocks are mounted on a 5' x 20' or 24' Farmco wagon with a 10' long tongue.



- Advantages: Zimmerman headlocks**
- Double coat finish.
 - Spring loaded neck bar.
 - Individual lock on each yoke to restrain each animal separately.

Advantages:
• Farm
• ment w
• front c

Hay Feeder

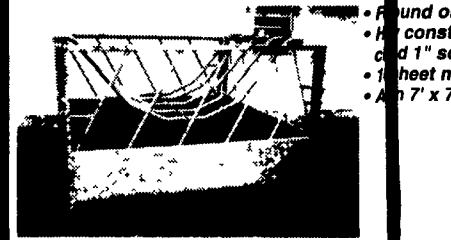


- Round or
- Hay const
- 1" sc
- 1' sheet m
- An 7' x 7'

Regular feed available with 4', 5', 6' panels

Bale

Combination

- Available with either quick attach or 3 PT hitch/loader boom mounting hardware
- 2500 lb capacity
- Easily change spear configuration



COM 252 338

Buck

Front Load



- Mount
- Makes
- 1500 lb
- Compl
- binder

Paul B. Zimmerman, Inc.