




Milking Equipment & Stalls

Walk-Through Milking Parlor

Ideal for flat floor installations

Features:

- Unique latch system operated by rod linkage, keeps doors in unlocked position until cow has exited.
- Cam balanced spring automatically resets door for next cow.
- Smooth, quiet operation with UHMW synthetic bushings on door hinges & soft rubber bumpers used on stops.
- Heavy duty frame, manufactured using 3 x 1 1/2 x 3/16 tubing.
- Brass ball joints on linkage and brass bushings in latch.
- Overall height is 71 1/2".
- Versatile rack holds any type milking equipment.

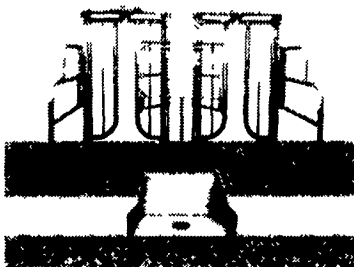


Upgrade or expand your current facility & stay in your budget!

Suspended Comfort Stalls


Install the Best!
Durable • Dependable



SS-45



SS-25




SS-45G



- Increased cow comfort.
- Powder coated surface stays cleaner.
- Easy access.
- Adjustable tie rail.

Loop Stalls

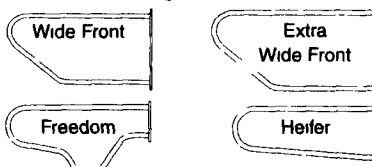

Available in 4', 5', 6'6", 6'9", & 7' Finish protects against rust, chipping, and chemical deterioration


Wide Front Loop Stalls

Versatile design offers greater cow comfort
Generous lunge space for head & neck between top and bottom of loop

Heavy duty construction with 2 3/8" outside diameter high yield steel tubing with 12 gauge (108) wall
Spray arc transfer method used on welds



Added Value With Our 2 Coat Process!



- 1 Five step metal preparation, including iron phosphate conversion coating, to enhance adhesion & prevent undercoat corrosion
- 2 Zinc rich epoxy powder undercoat
- 3 TGIC polyester powder top coat baked at 400° to fuse coats forming a cross link molecular bond

All metal parts are spray arc
Zimmerman Powder Coat
with a durable finish that


Feeder Wagons

This feeder with Zimmerman adjustable for animals 10 months or older The head on a 5' x 20' or 24' Farmco wagon with



- Advantages: Zimmerman headlocks**
- Double coat finish.
 - Spring loaded neck bar.
 - Individual lock on each yoke to restrain each animal separately.

Hay

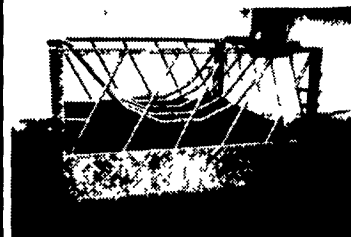


Regular feeder with 4', 5', 6',

Bale

Combination

- Available with either quick attach or 3 PT hitch/loader boom mounting hardware
- 2500 lb capacity
- Easily change spear configuration



COM 252-338

Buck Front

- Mounts
- Makes
- 1500 lb
- Complete binder

Paul B. Zimmerman, Inc.