


ave the benefit of the 2 Coat
o assure you of equipment
o chemicals & weather!

S

Headlocks

deal
anted
ongue

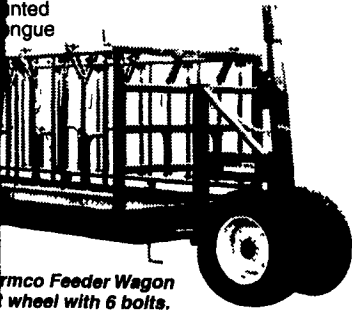

rmco Feeder Wagon
wheel with 6 bolts.
nt corners for added stability.

iders

of square & regular bales or stacks.
nstruction of 3/16" formed steel
" sch. 40 pipe.
t metal around bottom reduces hay loss.
x 7' and 7' x 10'.



lable
nels

vers

nt for
aders

**Front End
Loader Fork**



PLF 4000


- Mounts quickly
- Includes chain and binders
- 24" high load guard

les easy
an and


Cattle Handling Equipment

Headlocks

- Extra heavy construction.
- All yokes have individual locks.
- Easy in, easy out.
- Available in 3 sizes to meet all your needs.

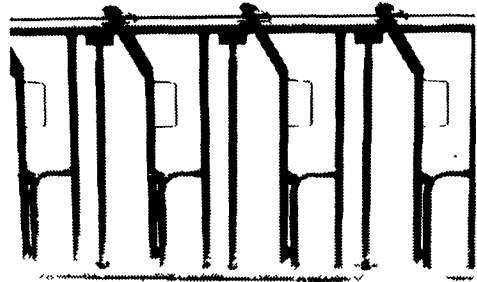

Automatic Headgate

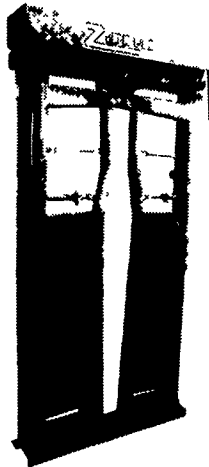


- Full roof cover for outdoor protection.
- Heavy duty latch for positive locking.
- Double linkage for extra stability.
- Quickly & easily adjusted from 5" to 7" for animal neck size.
- Handle assists manual operation for slow or horned cattle.
- Variety of chutes available.

**Combination Hoof Care /
Vet Chute**



Designed for safe and efficient handling of cattle for hoof care or veterinarian treatment.

Grooming Chute



- Keeps animal's head safely & comfortably in desired position.
- Shipped with 4 bars, allowing optional vertical, horizontal or combination configuration.
- Quickly & easily assembled & disassembled by 1 person.
- Expanded metal flooring reduces slipping.

Gates & Fencing

Manufactured to last, with our 2 coat finish that resists chemical corrosion, chipping & stays cleaner, longer!

- Standard heights:
- 4 bar- 38" high.
 - 5 bar- 48" high.
 - 6 bar- 54" high.

