

JD 4020 diesel, pwr shift, god rubber, good cond, \$8100. Days 814-766-2614, eves 814-224-4115

Scales, all types, grams to tons, new & used. 717-656-7353.

JD 6620 Titan II, side-hill combine, 915 flex head, \$14,000. 717-229-2750.

JD 785Hhydro Push Spreader, 540 PTO, single beater, hy-flow tires, exc. cond. \$8,000/OBO 717-587-2943.

IH 1066, TA, 10 hrs, \$6,900. 717/532-8926.

NH 402 crimpers. McCormick PTO corn binders. Hay rakes & balers. Kl-dreon, OH 419-294-5131

JD 922 floater, 4/aft, plastic, stainless, transporter, extra cutter bar. Field ready. Sold combine. \$4,500. 570-998-2032.

CIH 8830 SP haybine, \$12,500. Timberking portable bandmill \$10,000. Pequea tedder \$800. NI rake \$75. 717-993-5246

JD 6410 tractor 4x4, pwr quad, open station, 480 hrs, JD 640 loader. 301-733-2195

(4) Diesel power source. Isuzu 52hp w/all components & trons \$750/ea. obo. 301-977-0830

JD 918 S/H flex head, \$8500. 610-261-2639

NH 308 spreader, \$3000. Grimm tedder & IH 56 blower, \$600/ea. 717-776-7399

INJECTORS

Have you serviced yours?

Bad Injectors Cause:

- Excessive Fuel Consumption
- Poor Starting
- Loss Of Power
- Misfiring
- Black Smoke
- Overheating

So service them regularly!

As always, injectors are checked free of charge

PENN DIESEL SERVICE CO.

Diesel Technology Center
Factory Authorized
Fuel Systems & Turbochargers Specialists
Parts & Equipment Distributors




Exit 77 Interstate 81
337 N. Fairville Ave.
Harrisburg, PA 17112
Web: www.pennsdiesel.com
E-mail: pennsdiesel@hotmail.com

800-535-2913
717-545-4207
Fax: 717-545-0115

We Have J&D Manufacturing

Barn Stormer Fans

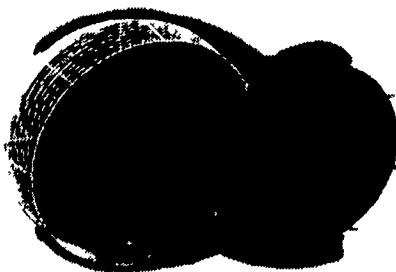

20" and 24"

The "Barn Stormer"

The Best In The Industry!!

- VBS20 offers 6,000 CFM
- VBS24 offers 8,500 CFM
- PVC Coated Grills
- Aluminum Blades
- Increased air inflow
- Increased outflow, "more push"

Many Other Fans in Stock we ship anywhere

ROVENDALE AG & BARN EQUIP.

WATSONTOWN, PA 17777
570-538-9564 OR 570-742-4226
Exit 31, I 80 to I 180 Watsontown Exit
Hours Mon-Fri 8 to 5 Sat 8 to 12

YAZOO / KEEES


POWER EQUIPMENT

Today's lawn care professional wants value and requires productivity. Both ingredients are found in every YAZOO/KEES commercial mower. Demo the MAX for the MAXIMUM in zero-turning radius excellence.



- 61" 27 HP.....\$7,295 As low as \$228/month
- 61" 25 HP.....\$6,895 As low as \$216/month
- 48" 18 HP.....\$4,895 As low as \$153/month
- 48" 15 HP.....\$2,499 Walk Behind
- 36" 13 HP.....\$1,999 Walk Behind

Financing Available




NOBLE OAK ENGINE REPAIR

Mon-Fri 6 30-5 00
Sat 6 30-11 30
701 Noble Road
Christiana, PA 17509

610-593-5458

Binkley & Hurst Bros. Stocks High Quality Rhino Machinery STOP IN OR CALL TODAY • 1-800-414-4705

SUPER-DUTY 15' CUTTER

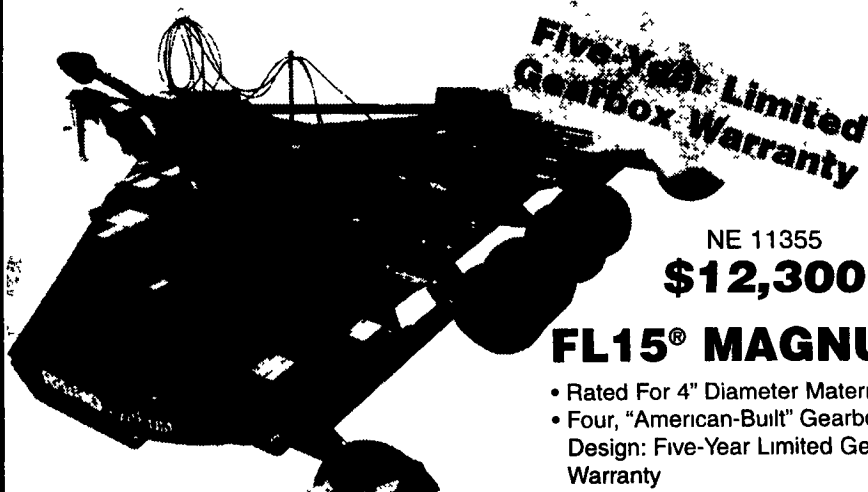

Five-Year Limited Gearbox Warranty

NE 11355
\$12,300

FL15® MAGNUM

- Rated For 4" Diameter Material
- Four, "American-Built" Gearbox Design: Five-Year Limited Gearbox Warranty
- 250 HP Power Divider Gearbox; 210 HP Outboard Gearboxes
- Super-duty Pan Blade Carriers
- Two-Year Limited Driveline Warranty
- "Bigfoot" Center Section Skid Shoes
- Super-Duty Tongue and Clevis
- 7 Gauge Deck
- F & R Chains

THE BEST IN TOUGHNESS AND QUALITY!



FL "American-Built" Gearboxes
The FL series from Servis-Rhino features super-duty "American-Built" gearboxes backed by a FIVE-YEAR LIMITED GEARBOX WARRANTY. The premium quality drivelines of the FL series are covered by an unequalled TWO-YEAR LIMITED DRIVELINE WARRANTY (Shields Removed to Snow Detail).

FL15 Wing Hinge Support

The SR15, FL15 Magnum, SR20, and FL20 feature continuously welded wing hinge tubes from front-to-rear for greater load bearing capabilities. All Rhino flex-wing cutters feature a one-piece, solid steel hinge pin for maximum strength and precise wing alignment (Chain Guards are optional Equipment, Deflectors are Standard)



Wing Float

A special "free-float" wing cylinder lug design helps reduce wear and tear on the wing hydraulic cylinders internal components. The wing is able to better follow ground contours more easily without the cylinders rod moving. (Except SE15-4A) The attachment of the cylinder to the lug is a precise fit, as compared to some competitive cutters where a slot is used to allow the wing to float. The Rhino design helps minimize wear and shock loads to components. The Rhino design is standard for greater safety and stores neatly out of the way when not in use.

FL15 Heavy-Duty Pan Blade Carriers

The super-duty pan blade carriers of the FL15 Magnum are 3/16" thick and reinforced by a 3/4" solid steel plate in the bottom of the pans. Besides adding strength and durability to the pan, the extra weight provides a "flywheel effect" in demanding cutting conditions which reduces operating costs. Lower gearbox seal protection is provided by a flange on the blade hub that completely overlaps the lower gearbox housing



SE's
Tough and Economical Family of Cutters!

5'x7' Instock

Get A Demonstrator Discount!
Grinder Up TO 4" Saplings

RY72
Extra Tough Cutter for Extra Tough Cutting Jobs!

72" Cut, 540 or 1000 RPM CAT II Heavy-Duty Three-Point Hitch, 140 HP "Rhino-Built" Gearbox (1000 RPM), Cat 4 Shielded Driveline, Slip Clutch Protection, Heavy-Duty Pan Blade Carrier, 3/16" Deck, 1/4"x9" Side Skirts, 1/2"x4" Updraft or Flat Blades, Rated for 4" Diameter Material, Safety Deflectors Standard

6 Foot Cut
Summer Special

UNIVERSAL QUICK ATTACH SKID LOADER MOWER SM60



The SM60 skid steer mower from Servis-Rhino® and your skid steer loader can tackle a range of industrial, commercial, and agricultural mowing jobs

Cutting Width: 60"

The skid steer loader must be equipped with an operator front protective door. Contact your skid steer manufacturer or an authorized dealer for equipping your loader with a protective door.

DITCHBANK MOWER

DB150. Over 30 years of hydraulic mower design experience has made the Rhino® DB150 the preferred choice of experienced operators for the mowing of pond banks, levees, drainage ditches, and hard-to-reach areas



The DB150 can extend to a maximum of 158" from the center line of the tractor allowing the 60 inch rotary head to cut areas that are difficult or impossible to reach with ordinary mowers. By being hydraulically driven, maintenance is greatly reduced with the absence of

belts and pulleys. The DB150 outperforms many competitive units with smaller hydraulic systems. The DB150 utilizes a 60 gallon hydraulic system which allows the unit to run cooler in tough mowing conditions. The large reservoir also serves as a counterweight and remains stationary on the mainframe eliminating the potential traffic hazard of a movable counter-balance weight. The DB150 features a heavy-duty three-point hitch using a lower double lug hitch system to fit a wide range of tractors. To help insure a clean cut, the DB150 features updraft blades and a blade tip speed of 20,028 FPM

New Mower Used To Mow Our Machinery Lot Once or Twice



SE8
In Stock


The Rhino® SE8 is an economical rotary mower designed to help maintain larger acreages of grass, weeds, stalks, or material up to 1" in diameter.

The streamlined close-coupled design allows economical operation on tractors as small as 30 horsepower on the SE8. The 85 HP center gearbox and 60 HP outboard gearboxes are protected from sudden shockloads by a slip clutch on the main driveline and torque dampeners on the side driveshafts. Pan blade carriers help the unit glide over field obstacles and updraft blades with a 4" blade overlap provide a clean cut

QUALITY 3 PT. POST HOLE DIGGERS w/AUGERS


1 Only!
Summer Special

Double Flighting and Slip Clutch



BINKLEY & HURST BROS. INC.

133 Rothsville Station Rd.
P.O. Box 0395
Litzitz, PA 17543-0395
(717) 626-4705
1-800-414-4705
Fax 717-626-0996

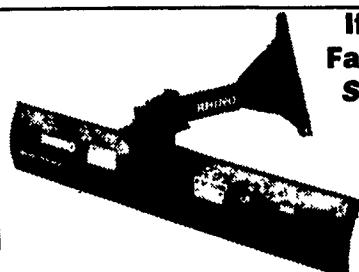

If You Have A Compact Tractor Or A Large Farm Tractor, We Have A 3 Pt. Blade For You!
STOP IN AND SEE BINKLEY & HURST NOW!

The LR Blade has been setting the standard in medium-duty blades for over 20 years. The LR is ideal for road maintenance, soil leveling, ditching and terracing work, or feedlot cleanup on tractors. Durability and ruggedness are built into every LR with features including a 2" solid steel kingpin and a 5/16" thick moldboard. Versatility is provided by the LR's three basic mechanical adjustments: moldboard tilt, pivot, and mainframe swing which add up to a total of 22 non-wrench adjustments.